



6861

6861

TRAVELING-WAVE TUBE

LOW-NOISE AMPLIFIER TYPE

Useful over frequency range of 2700 to 3500 Mc

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:


Voltage	5		ac or dc volts
Current at 5 volts.	0.65		amp
Starting current:	The maximum instantaneous starting current must never exceed 4 amperes, even momentarily.		
Minimum Cathode Heating Time.	1		minute
Frequency Range	2700 to 3500		Mc
Cold Insertion Loss	80		db

Mechanical:

Operating Position.	Any	←
Cooling	Natural	←
Maximum Overall Length.	19-3/8"	←
Metal-Shell Diameter.	1.375" ± 0.005"	←
Weight (Approx.).	1-1/2 lbs	←
Collector-Terminal Connector.	Birnbach No.403 Banana Jack	←
RF Connectors:		
Input terminal.	Type N UG-18B/U Plug	←
Output terminal	Type N UG-18B/U Plug	←
Base.	Octal 8-Pin	←

BOTTOM VIEW

Pin 1-Grid No.1
Pin 2-No Connec-
tion
Pin 3-Helix
Pin 4-Grid No.4



Pin 5-Grid No.3
Pin 6-Grid No.2
Pin 7-Heater
Pin 8-Heater,
Cathode

Maximum and Minimum Ratings, Absolute Values:

DC COLLECTOR VOLTAGE.	500 max.	volts	
DC HELIX VOLTAGE.	500 max.	volts	
DC GRID-No.4 VOLTAGE.	500 max.	volts	
DC GRID-No.3 VOLTAGE.	300 max.	volts	
DC GRID-No.2 VOLTAGE.	75 max.	volts	
DC GRID-No.1 VOLTAGE.	20 max.	volts	
DC COLLECTOR CURRENT.	500 max.	μa	←
DC HELIX CURRENT.	5 max.▲	μa	←
MAGNETIC FIELD STRENGTH	400 min.●	gausses	←
PEAK RF POWER INPUT	100 max.	watts	←
AVERAGE RF POWER INPUT.	0.4 max.	watt	←
METAL-SHELL TEMPERATURE (At hottest point).	175 max.	°C	

▲ During alignment of the tube in the magnetic-focusing field, the helix current may exceed this value for short periods, but should never exceed 25 μa.

● See next page.

← Indicates a change.

6861



6861

TRAVELING-WAVE TUBE

Typical Operation at 3100 Mc:

DC Collector Voltage	400	volts
DC Helix Voltage	375	volts
DC Grid-No.4 Voltage	200	volts
DC Grid-No.3 Voltage	40	volts
DC Grid-No.2 Voltage (Approx.)	20	volts
DC Grid-No.1 Voltage	0	volts
DC Collector Current	150	μ a
DC Helix Current	0.5	μ a
DC Grid-No.4 Current	each less than 1 μ a	
DC Grid-No.3 Current		
DC Grid-No.2 Current		
DC Grid-No.1 Current		
Magnetic-Field Strength†	525 $\pm$ 5%	gausses
Gain (Low level)	25	db
Power Output (Saturated)	1	mw
Noise Figure	6.5	db

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.45	0.85	amp
Input VSWR (Non-operating)	2	-	1.7	
Output VSWR (Non-operating)	2	-	2	
DC Helix Voltage	3	350	390	volts
DC Grid-No.4 Voltage	3	160	275	volts
DC Grid-No.3 Voltage	3	20	50	volts
Saturated Power Output	3	0.25	-	mw
Gain	3	20	-	db
Noise Figure	3	-	7	db

Note 1: With heater voltage of 5 volts.

Note 2: Measured at specified connector over the frequency range of 2700 to 3500 Mc.

Note 3: Adjusted for optimum noise figure with a magnetic field of 525 gauss, signal frequency of 3100 Mc, and heater voltage of 5 volts.

OPERATING CONSIDERATIONS

The *magnetic field* required for focusing the electron beam of the 6861 may be obtained from a solenoid or permanent magnet capable of providing a uniform field of 525 gauss over the length of the tube axis starting 2 inches from the groove near the base end of the metal shell and continuing for at least 9 inches along the tube axis.

* This value of field strength will focus the electron beam, but noise figure will not be optimum.

† For RCA Solenoid Type MW-4900.


→Indicates a change.



6861

6861


TRAVELING-WAVE TUBE

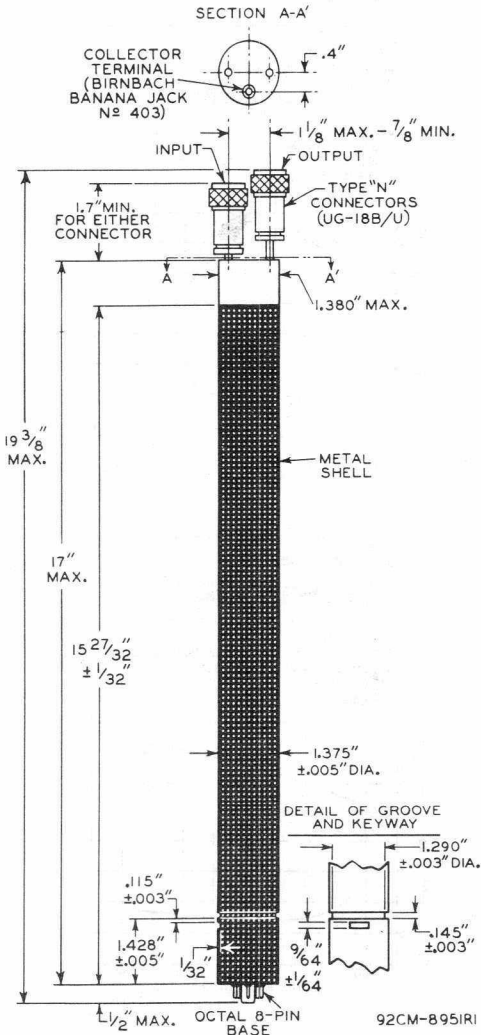




6861

NOISE-FIGURE CHARACTERISTICS

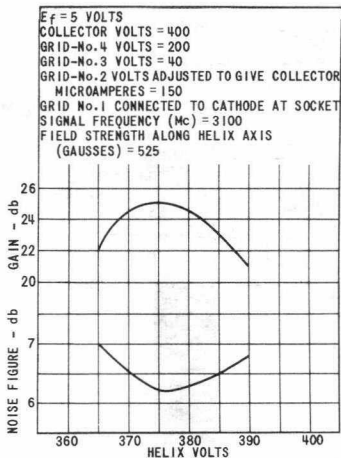

92CS-8965T

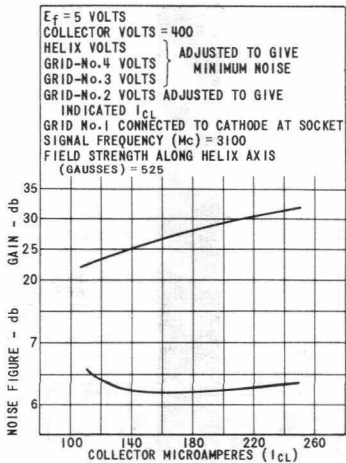


92CS-8968T




6861

6861

TRAVELING-WAVE TUBE

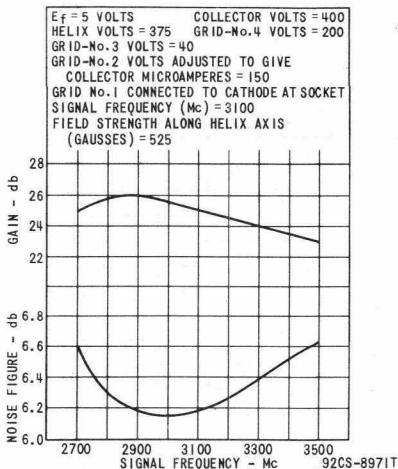NOISE - FIGURE
CHARACTERISTICS

SATURATION CHARACTERISTICS

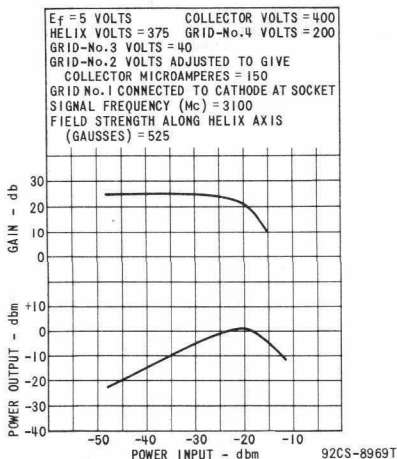

6861



6861

INPUT-MATCHING CHARACTERISTIC

