

ADVANCE DATA

The Sylvania Type 6947 is a subminiature medium mu double triode. This type is characterized by extraordinary freedom from interelement short circuits of short term duration, by high resistance to interelement leakage, and by stable performance. In addition, vibrational output when the tube is subjected to wide band (White Noise) vibration is held to a very low value. It is suitable for service at high altitudes and where severe conditions of mechanical shock, vibration and high temperature are encountered. These characteristics give the type special value in guided missile applications.

MECHANICAL DATA

Bulb	T-3
Base	E8-10 Subminiature Button
Outline	3-11
Basing	8DG
Cathode	Coated Unipotential
Mounting Position	Any

RATINGS¹

Bulb Temperature (At Hottest Point)	250 °C	Max.
Operational Altitude	80,000 Ft	Max.

DURABILITY CHARACTERISTICS²

Impact Acceleration ³	100 G
Vibrational Acceleration for an Extended Period ⁴	10 G
On-Off Heater Cycles ⁵	2000

ELECTRICAL DATA

HEATER CHARACTERISTICS



Heater Voltage	6.3 V	
Heater Current	350 mA	
Heater-Cathode Voltage (Absolute Values)	200 v	Max.

CONTROLLED DETRIMENTS

Interelectrode Insulation ⁶	250 Meg	Min.
Total Grid Current ⁷	-0.3 μ A dc	Max.
Grid Emission ⁸	-0.5 μ A dc	Max.
Hum Output ⁹	15 mv pk-pk	Max.
White Noise Vibration Output ¹⁰	150 mv pk-pk	Max.
	30 mV rms	Max.
Heater-Cathode Leakage ¹¹	5.0 μ A dc	Max.

QUICK REFERENCE DATA

The Sylvania Type 6947 is a subminiature general purpose medium mu double triode designed specifically for guided missile service.

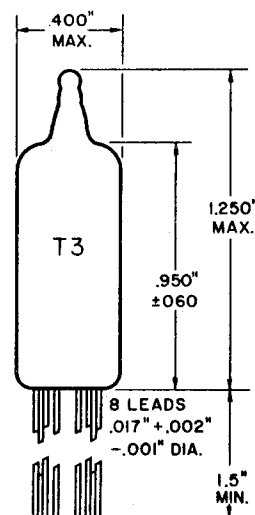

SYLVANIA ELECTRIC
PRODUCTS INC.

RADIO TUBE DIVISION
EMPORIUM, PA.

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

May 6, 1957

Page 1 of 3

DIRECT INERELECTRODE CAPACITANCES (Without External Shield)

Grid to Plate	1.2	μuf	
Input: g to (h + k)	1.6	μuf	
Output: Triode No. 1: p to (h + k)	0.20	μuf	
Output: Triode No. 2: p to (h + k)	0.25	μuf	
Coupling:			
Grid to Grid	0.010	μuf	Max.
Plate to Plate	0.45	μuf	Max.

RATINGS¹ (Absolute Values)

Heater Voltage Variation	6.3 $\pm$ 10%	V	Max.
Instantaneous Plate Voltage	360	v	Max.
Plate Voltage	250	Vdc	Max.
Plate Dissipation Each Plate	0.75	W	Max.
Plate Current Each Plate	13	mA _{dc}	Max.
Positive Grid Voltage	0	Vdc	Max.
Negative Grid Voltage	55	Vdc	Max.
External Grid Circuit Resistance	1.0	Meg	Max.

AVERAGE CHARACTERISTICS (Each Section)

Conditions:			
Heater Voltage	6.3	V	
Plate Voltage	150	Vdc	
Cathode Bias Resistor	270	Ohms	
Plate Current	6.5	mA _{dc}	
Transconductance	4000	μmhos	
Amplification Factor	35		
Grid No. 1 Voltage for $I_b = 10 \mu\text{A}$	-9.0	Vdc	
Plate Current Difference Between Sections	1.5	mA _{dc}	Max.
Operation Time ¹² (maximum)	20	secs	

NOTES:

1. Limiting values beyond which normal tube life and normal tube performance may be impaired.
2. Tests performed as a measure of the mechanical durability of the tube structure.
3. Force as applied in any direction by the Navy Type High Impact (Flyweight) Shock Machine for Electronic Devices. Shock duration = 4 milliseconds.
4. Vibrational forces applied in any direction for a period of six hours repeatedly sweeping the range from 30 cps to 3000 cps and back, with the period of the sweep cycle being three minutes.
5. One cycle consists of the application of $E_f = 7.0 \text{ V}$ for one minute and interruption of the filament voltage for four minutes. A voltage of $E_{hk} = 140 \text{ Vac}$ is applied continuously.

6. Measure each section separately with $E_f = 6.3$ V; $E_{g\text{-all}} = -100$ Vdc; $E_{p\text{-all}} = -300$ Vdc; cathode is positive so that no cathode emission occurs.
7. Measure each section separately with $E_f = 6.3$ V; $E_b = 150$ Vdc; $R_k = 270$ Ohms; $R_g = 1.0$ Meg.
8. Each section preheated for five minutes with $E_f = 7.5$ V; $E_b = 250$ Vdc; $R_k = 1200$ Ohms; $R_{g1} = 1.0$ Meg; then each section tested separately with $E_f = 7.5$ V; $E_b = 150$ Vdc; $E_{c1} = -9$ Vdc; $R_g = 1.0$ Meg. This is a destructive test and therefore must be conducted on a sample basis.
9. Test each section separately with $E_f = 6.3$ V; (400 cps), $E_b = 150$ Vdc; $R_k = 270$ Ohms; $R_L = 10,000$ Ohms; Measure the hum output across the R_L in the frequency band from 20 cps to 5000 cps.
10. Test each section separately with $E_f = 6.3$ V; $E_b = 150$ Vdc; $R_k = 270$ Ohms; $R_p = 10,000$ Ohms; The White Noise voltage across R_p is filtered to roll off approximately 35 db between 10,000 cps and 13,000 cps and is then measured with both a peak to peak meter and an rms reading meter. The vibrational force applied to the tube under test is such that the instantaneous values of acceleration form a White Noise spectrum from 100 cps to 5000 cps. Energy with this spectrum is distributed such that each octave of bandwidth delivers 2.3 G's rms acceleration. The degree of clipping is such that peak values of acceleration exceed 15 G's.
11. Measure each section separately with $E_f = 6.3$ V; $E_{hk} = \pm 100$ Vdc.
12. Operation time is the time required for a tube to reach a value of plate current equal to 85% of that value attained after three minutes.