—PRODUCT INFORMATION—

6AH9

Compactron Triode-Pentode

- COLOR TV TYPE
- FRAME-GRID VIDEO PENTODE
- 10 WATTS PLATE DISSIPATION
- MULTI-FUNCTION
- 21000 MICROMHOS
- MEDIUM-MU TRIODE

The 6AH9 is a compactron containing a medium-mu triode and a sharp-cutoff, frame-grid pentode. The pentode is designed primarily for video amplifier service and the triode for color blanker or general purpose applications in color television receivers

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC★	6.3 ± 0.6	Volts
Heater Current●	0.9	Amperes

Direct Interelectrode Capacitances♦

Pentode Section

Grid-Number 1 to Plate: (Pg1 to Pp)	0.15	pf
Input: Pg1 to (h + Pk + Pg2 + Pg3 + i.s.)	15	pf
Output: Pp to (h + Pk + Pg2 + Pg3 + i.s.)	6.0	pf

Triode Section

Grid to Plate: (Tg to Tp)	3.7	pf
Input: Tg to (h + Tk)	2.4	pf
Output: Tp to (h + Tk)	0.4	pf

MECHANICAL

Operating Position - Any
Envelope - T-9, Glass
Base - E12-70, Button 12-Pin
Outline Drawing - EIA 9-59

Maximum Diameter	1.188	Inches
Minimum Diameter	1.062	Inches
Maximum Over-all Length	2.625	Inches
Maximum Seated Height	2.250	Inches
Minimum Seated Height	2.000	Inches

PHYSICAL DIMENSIONS

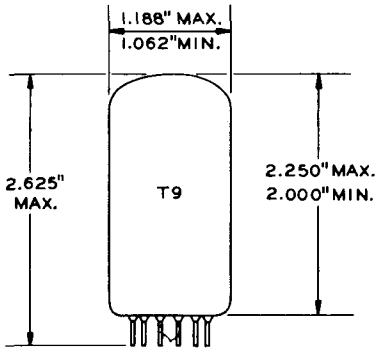

EIA 9-59

TERMINAL CONNECTIONS

Pin 1 - Heater
Pin 2 - Triode Grid
Pin 3 - Triode Plate
Pin 4 - Triode Cathode
Pin 5 - Pentode Grid Number 1
Pin 6 - Pentode Grid Number 1
Pin 7 - Pentode Cathode
Pin 8 - Pentode Grid Number 2 (Screen)
Pin 9 - Pentode Grid Number 3 (Suppressor) and Internal Shield
Pin 10 - No Connection
Pin 11 - Pentode Plate
Pin 12 - Heater

BASING DIAGRAM



EIA 12HJ

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

Supersedes 6AH9 PI Sheet dated 10-68

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES

	Pentode Section	Triode Section	
Plate Voltage	400	330	Volts
Suppressor Voltage	0	---	Volts
Screen Supply Voltage	330	---	Volts
Screen Voltage - See Screen Rating Chart			
Positive DC Grid-Number 1 Voltage	0▲	0	Volts
Plate Dissipation	10	2.0	Watts
Screen Dissipation	1.0	---	Watts
Heater-Cathode Voltage			
Heater Positive with respect to Cathode			
DC Component	100	100	Volts
Total DC and Peak	200	200	Volts
Heater Negative with respect to Cathode			
Total DC and Peak	200	200	Volts
Grid-Number 1 Circuit Resistance			
With Fixed Bias	0.1	1.0	Megohms
With Cathode Bias	0.25	---	Megohms

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS

		Pentode Section	Triode Section	
Plate Voltage	50	250	250	Volts
Screen Voltage	125	150	---	Volts
Grid-Number 1 Voltage	0§	0	-9.0	Volts
Cathode-Bias Resistor	---	122	---	Ohms
Amplification Factor	---	---	20	
Plate Resistance, approximate	---	55000	7500	Ohms
Transconductance	---	21000	2750	Micromhos
Plate Current	76	25	8.0	Milliamperes
Screen Current	32	6.0	---	Milliamperes
Grid-Number 1 Voltage, approximate Ib = 100 Microamperes	---	-7.2	-18	Volts

NOTES

★ The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.

● Heater current of a bogey tube at Ef = 6.3 volts.

♦ Without external shield.

▲ Control grid to cathode spacing of the pentode section of this tube is of such low order of magnitude as to preclude the use of voltage between these elements of more than 50 volts dc or peak ac in commercial tube checkers and shorts-indicating devices, particularly where mechanical excitation of the tube is employed.

§ Applied for short interval (two seconds maximum) so as not to damage tube.

SCREEN RATING CHART

PENTODE SECTION

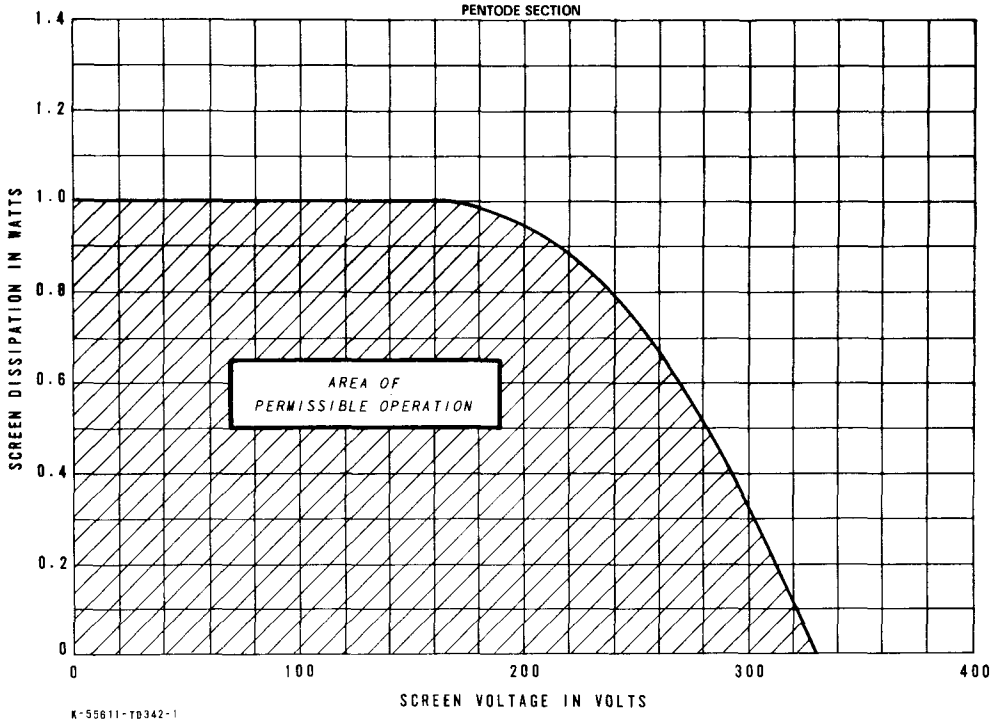

AVERAGE PLATE CHARACTERISTICS

PENTODE SECTION

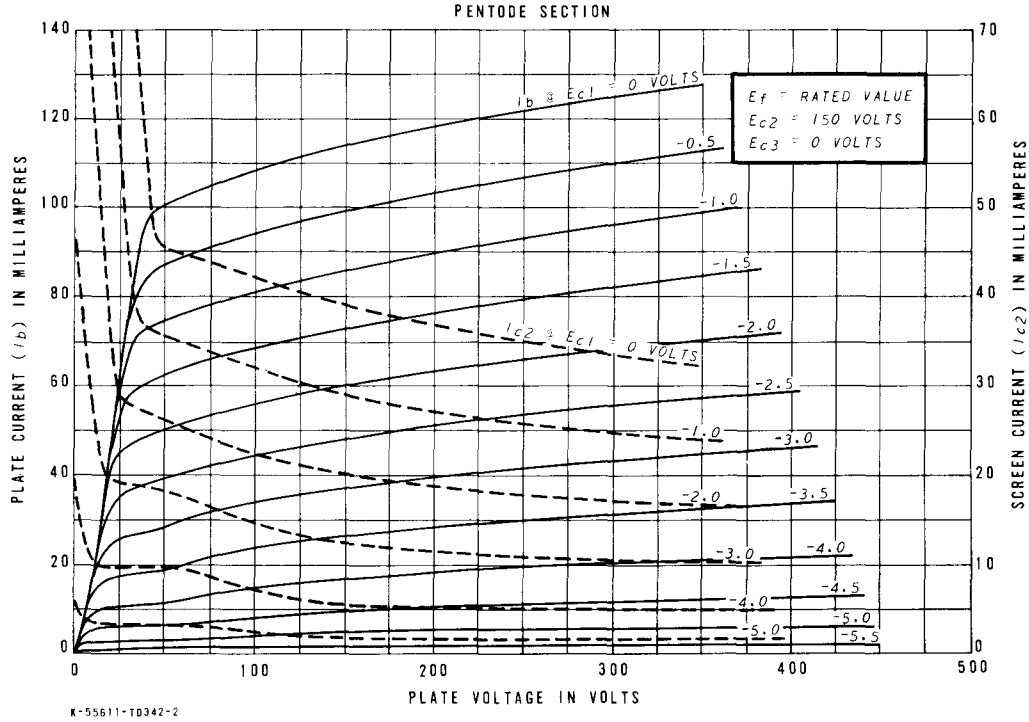

AVERAGE PLATE CHARACTERISTICS

PENTODE SECTION

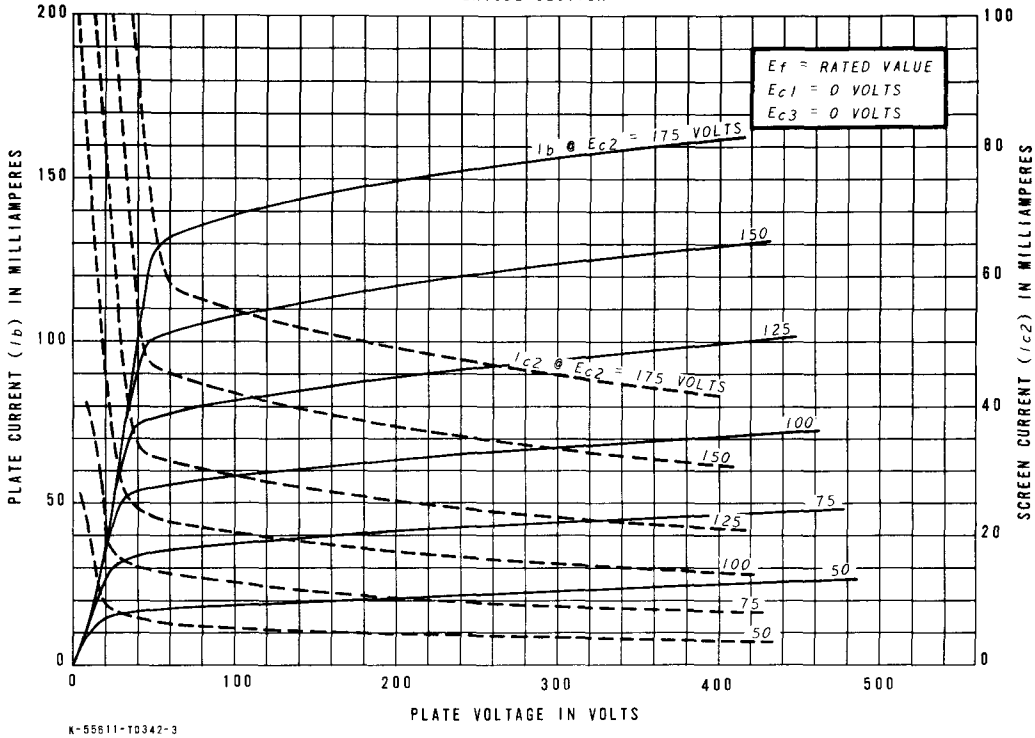

K-55611-T0342-3

AVERAGE TRANSFER CHARACTERISTICS

PENTODE SECTION

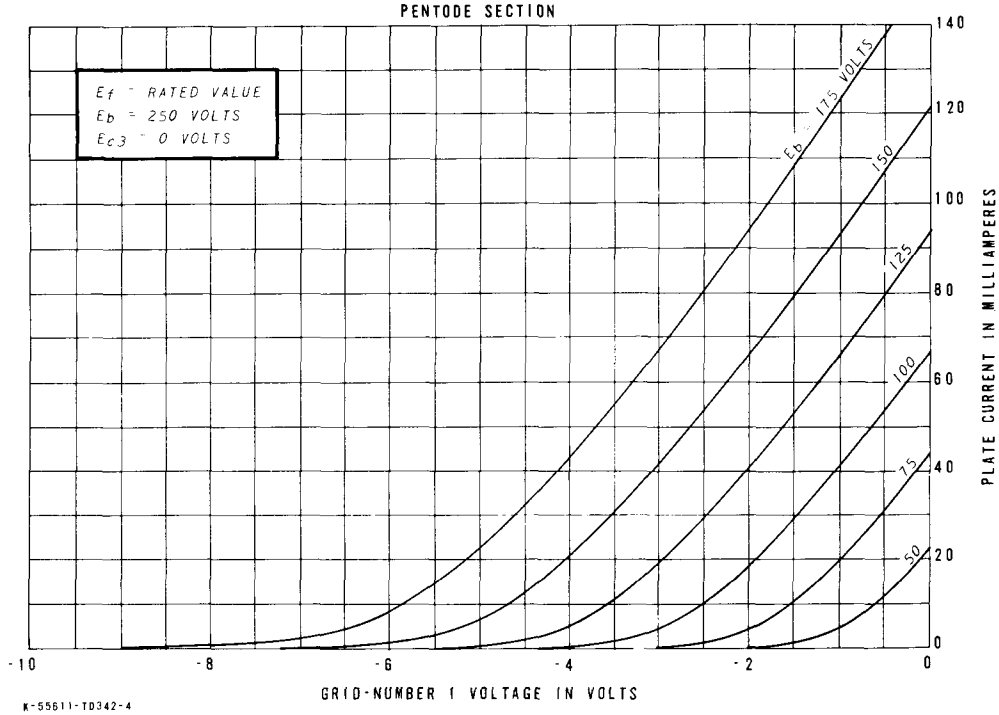

K-55611-T0342-4

AVERAGE TRANSFER CHARACTERISTICS

PENTODE SECTION

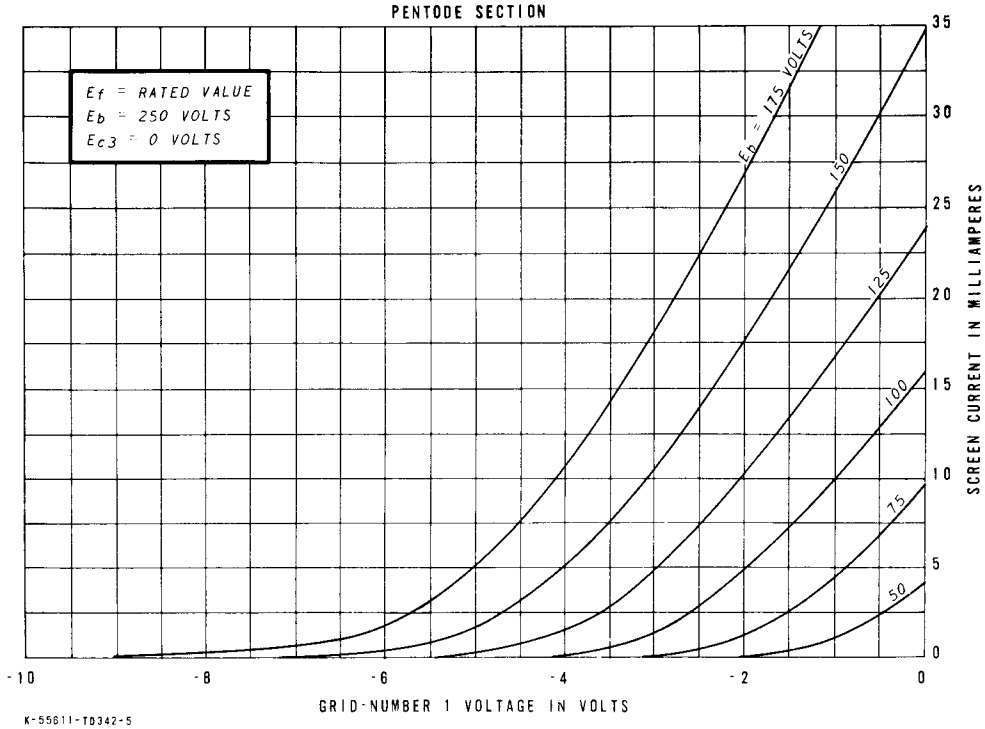

K-55611-TD342-5

AVERAGE PLATE CHARACTERISTICS

TRIODE SECTION

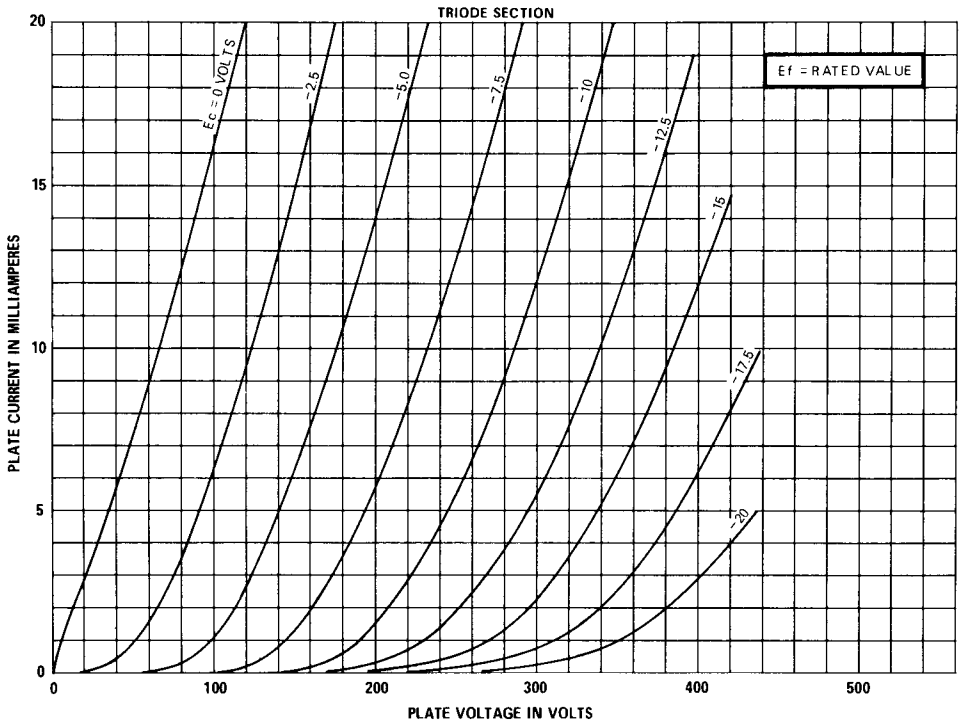

K-55611-TD356-1

AVERAGE TRANSFER CHARACTERISTICS

TRIODE SECTION

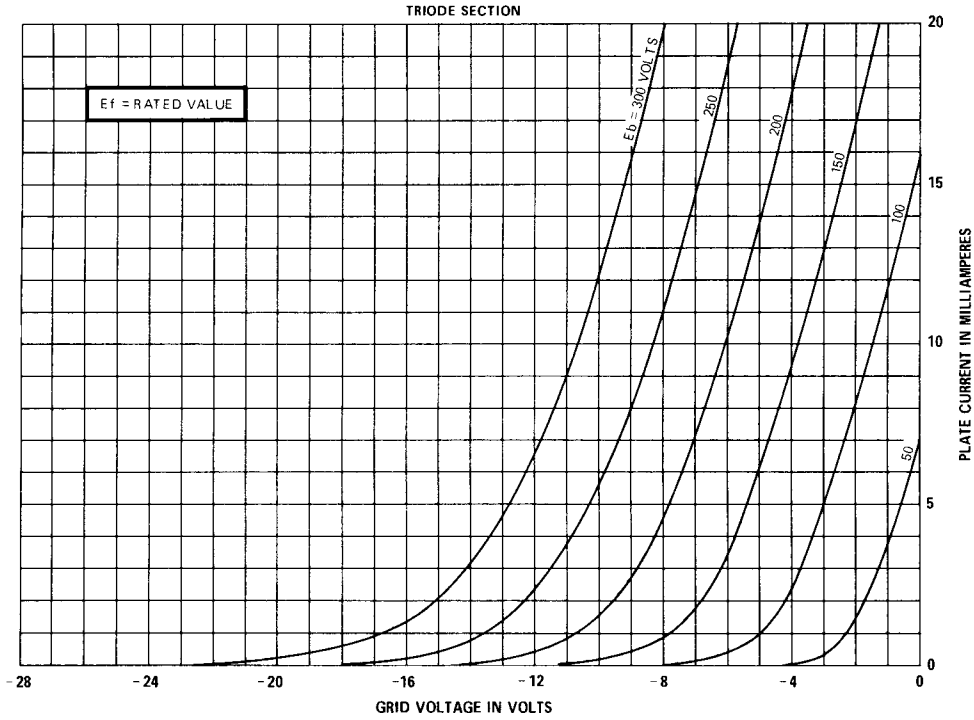

K-55611-TD356-2

AVERAGE CHARACTERISTICS

TRIODE SECTION

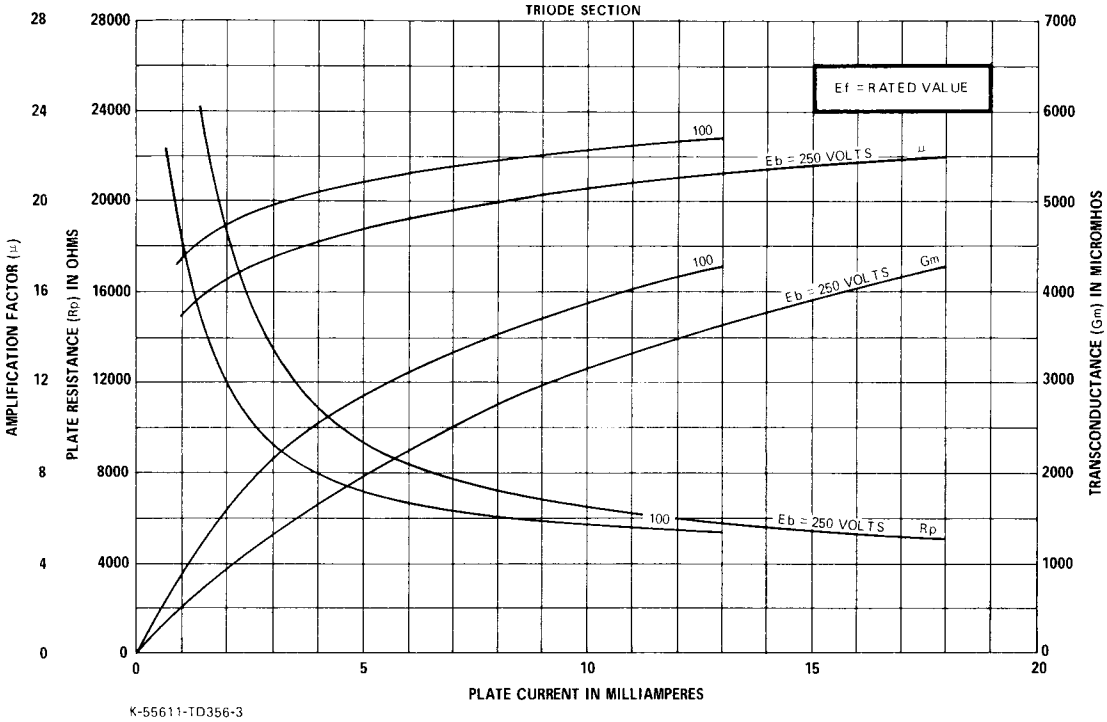

K-55611-TD356-3

TUBE PRODUCTS DEPARTMENT

GENERAL ELECTRIC

Owensboro, Kentucky 42301