


SYLVANIA TYPE **6AM8** **6AM8A** **5AM8**



DIODE PENTODE

MECHANICAL DATA

Bulb.....	T-6 1/2, Outline 6-2
Base.....	Small Button 9-Pin
Basing.....	9CY
Mounting Position.....	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS	5AM8	6AM8A	6AM8
Heater Voltage.....	4.7	6.3	6.3 Volts
Heater Current.....	600	450	450 Ma
Heater Warm-up Time.....	11	11	Seconds
Maximum Heater-Cathode Voltage			200 Volts
Total D C and Peak.....			100 Volts
D C, Heater Positive with Respect to Cathode.....			

DIRECT INTERELECTRODE CAPACITANCES

Pentode	Shielded
Grid to Plate.....	0.015 μ f Max
Input.....	6.5 μ f
Output.....	2.6 μ f
Diode	
Input: p to (h+k).....	1.8 μ f
Cathode to (h+p).....	3.0 μ f
Coupling: (diode p to pentode p).....	0.10 μ f
Coupling: (diode p to grid 1).....	0.006 μ f
Coupling: (diode k to pentode p).....	0.15 μ f

MAXIMUM RATINGS (Design Center Values)

Plate Voltage.....	330 Volts
Plate Dissipation.....	3.2 Watts
Grid No. 2 Voltage.....	See Rating Chart
Grid No. 2 Supply Voltage.....	330 Volts
Grid No. 2 Dissipation.....	0.55 Watt
Positive Grid No. 1 Voltage.....	0 Volts
Grid No. 3 Voltage.....	0 Volts
Grid No. 1 Circuit Resistance	
Cathode Bias.....	1.0 Megohm
Fixed Bias.....	0.25 Megohm
Diode Current for Continuous Operation.....	5.0 Ma

CHARACTERISTICS

Plate Voltage.....	125 Volts
Grid No. 2 Voltage.....	125 Volts
Grid No. 3 Voltage.....	0 Volts
Cathode Resistor.....	56 Ohms
Plate Current.....	12.5 Ma
Grid No. 2 Current.....	3.2 Ma
Transconductance.....	7800 μ mhos
Plate Resistance (Approx.).....	0.3 Megohm
Grid No. 1 Voltage for $I_b = 20 \mu$ a.....	-6 Volts
I_b at $E_{C1} = -3$ Volts, $R_K = 0$	2.0 Ma
Diode Plate Voltage for Diode Current of 50 Ma ²	10 Volts

NOTES:


1. Shield No. 315.
2. Test condition only. Operating conditions must not exceed the design center rating.

APPLICATION


Sylvania Type 6AM8, 6AM8A and 5AM8 are miniature diode-pentodes designed for use as combined video detectors and last if stages. The pentode section has a sharp cutoff characteristic and is similar to the Type 6CB6. The diode is similar to one section of a 6AL5.

6AM8, 6AM8A, 5AM8 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

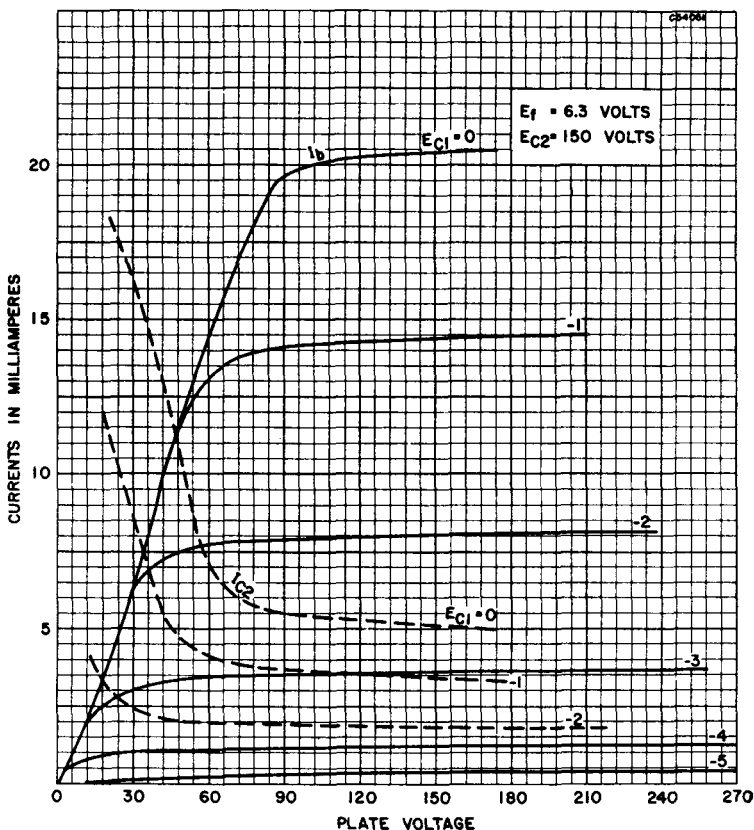

AVERAGE TRANSFER CHARACTERISTICS

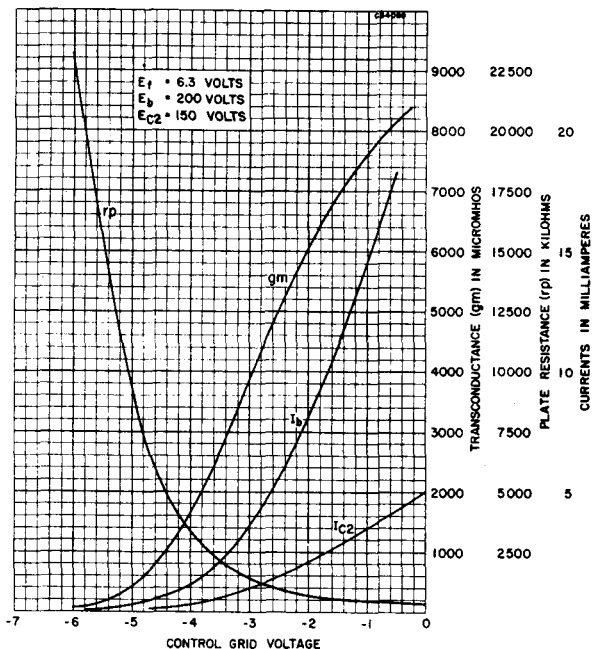

6AM8, 6AM8A, 5AM8 (Cont'd)

RATING CHART

