



6AS8

6AS8

DIODE-SHARP-CUTOFF PENTODE

9-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage 6.3 ac or dc volts

Current 0.45 amp

Direct Interelectrode Capacitances (Approx.):*

Diode Unit:

Plate to heater and cathode and
internal shield 3.0 μf

Pentode Unit:

Grid No.1 to plate 0.04 max. μf Input 7 μf Output 2.2 μf Pentode grid to diode plate 0.005 max. μf Pentode plate to diode cathode 0.15 max. μf Pentode plate to diode plate 0.10 max. μf Characteristics, Class A₁:

Plate-Supply Voltage 200 volts

Grid No.3 Connected to cathode at socket

Grid-No.2 Supply Voltage 150 volts

Cathode-Bias Resistor 180 ohms

Plate Resistance (Approx.) 300000 ohms

Transconductance 6200 μmhos

Grid-No.1 Bias (Approx.) for Plate

Current of 10 μamp -8 volts

Plate Current 9.5 ma

Grid-No.2 Current 3 ma

Mechanical:

Mounting Position Any

Maximum Overall Length 2-3/16"

Maximum Seated Length 1-15/16"

Length, Base Seat to Bulb Top

(Excluding Tip) 1-9/16" $\pm$ 3/32"

Maximum Diameter 7/8"

Bulb T-6-1/2

Base Small-Button Noval 9-Pin (JETEC No.E9-1)

Basing Designation for BOTTOM VIEW 9DS

Pin 1-Pentode

Grid No.2

Pin 2-Pentode

Grid No.1

Pin 3-Pentode

Cathode

Pin 4-Heater

Pin 5-Heater



Pin 6-Diode

Plate

Pin 7-Pentode

Grid No.3,
Int. Shield

Pin 8-Diode

Cathode

Pin 9-Pentode

Plate

* With no external shield.

MAY 3, 1954

TUBE DIVISION

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6AS8



6AS8

DIODE—SHARP-CUTOFF PENTODE

PENTODE UNIT—Class A₁ Amplifier

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	300 max.	volts
GRID-No.3 (SUPPRESSOR) VOLTAGE	0 max.	volts
GRID-No.2 SUPPLY VOLTAGE	300 max.	volts
GRID-No.2 (SCREEN) VOLTAGE	See Rating Curve at front of this Section	

GRID-No.1 (CONTROL-GRID) VOLTAGE:

Positive bias value	0 max.	volts
PLATE DISSIPATION	2.5 max.	watts
GRID-No.2 INPUT	0.5 max.	watt

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode .	200 max.	volts
Heater positive with respect to cathode .	200 [•] max.	volts

Maximum Circuit Values (For maximum rated conditions):

Grid-No.1—Circuit Resistance:

For cathode-bias operation	1.0 max.	megohm
For fixed-bias operation	0.25 max.	megohm

DIODE UNIT

Maximum Ratings, Design-Center Values:


PEAK INVERSE PLATE VOLTAGE	330 max.	volts
PEAK PLATE CURRENT	50 max.	ma
DC PLATE CURRENT	5 max.	ma

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode	200 max.	volts
Heater positive with respect to cathode	200 [•] max.	volts

[•] The dc component must not exceed 100 volts.

AVERAGE PLATE CHARACTERISTIC

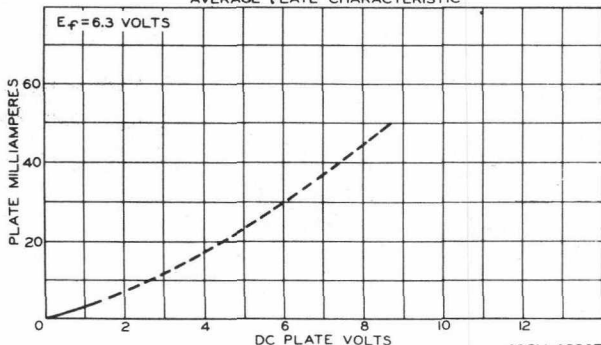

92CM-8236T

MAY 3, 1954

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA




6AS8

6AS8

AVERAGE PLATE CHARACTERISTICS PENTODE UNIT

$E_f = 6.3$ VOLTS
GRID-№2 VOLTS = 150

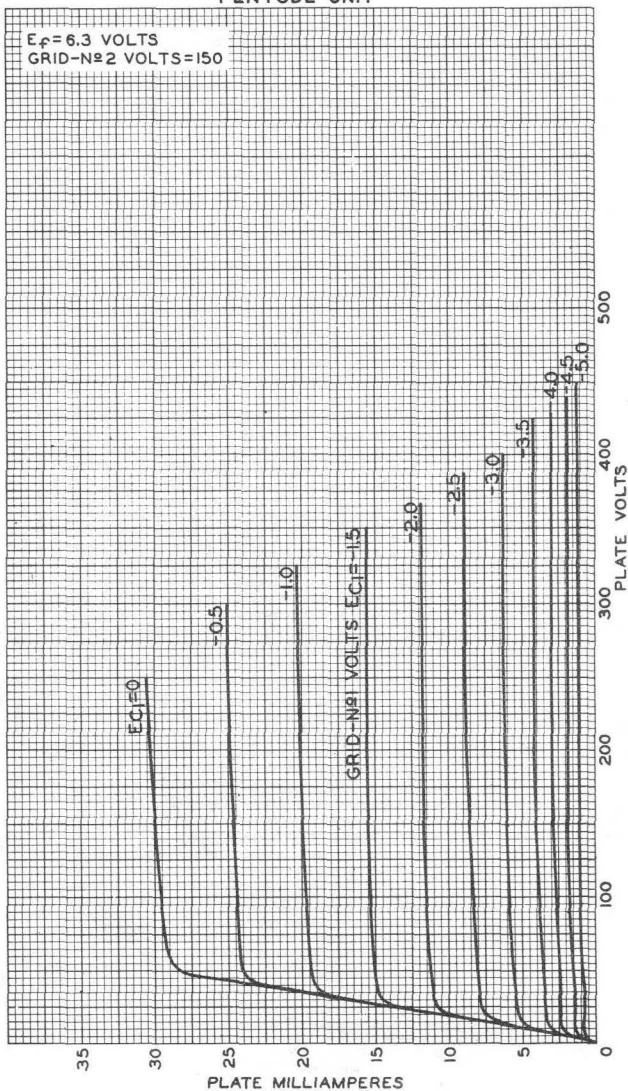

DEC.23,1953

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-8206


6AS8



6AS8

AVERAGE CHARACTERISTICS
PENTODE UNIT

$E_f = 6.3$ VOLTS
PLATE VOLTS = 200
GRID-N $\circ$ 2 VOLTS = 150

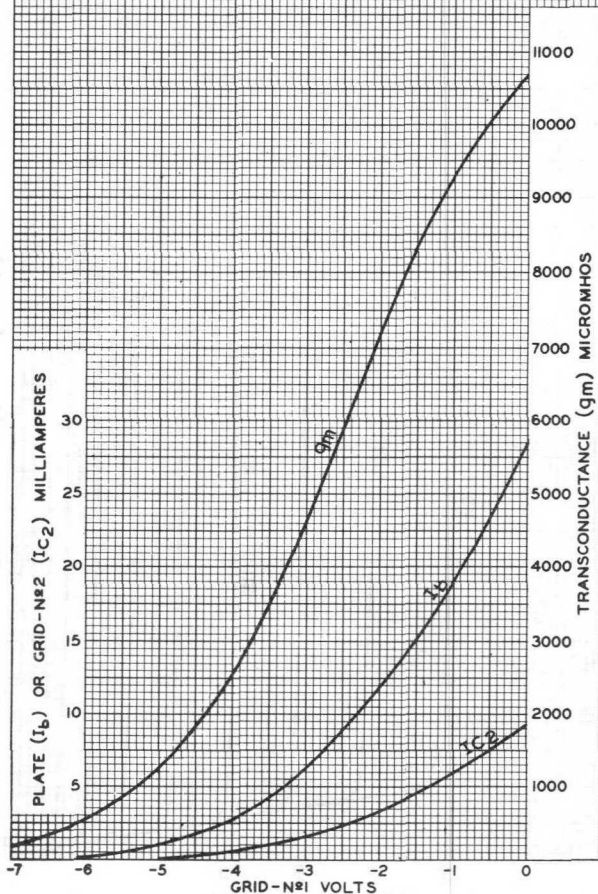

DEC. 23, 1953

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-8208