


TUNG-SOL




GLASS BULB
MINIATURE BUTTON
7 PIN BASE E7-1
OUTLINE DRAWING
JEDEC 9-2

PENTODE
MINIATURE TYPE
COATED UNIPOTENTIAL CATHODE

HEATER
6.3±0.6 VOLTS 300 MA.
AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW
PINNING DIAGRAM
JEDEC 7PK

THE 6BA6 IS A PENTODE AMPLIFIER HAVING REMOTE CONTROL GRID CHARACTERISTIC AND UTILIZING THE MINIATURE CONSTRUCTION. AS AN RF AMPLIFIER IT IS CHARACTERIZED BY HIGH TRANSCONDUCTANCE AND LOW GRID-PLATE CAPACITANCE.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
GRID TO PLATE: G_1 TO P (MAX.)	0.0035	0.0035	pf
INPUT: G_1 TO (H+K+ G_2 + G_3 +IS)	5.5	5.5	pf
OUTPUT: P TO (H+K+ G_2 + G_3 +IS)	5.5	5	pf

^AEXTERNAL SHIELD #316 CONNECTED TO PIN #7.

RATINGS

INTERPRETED ACCORDING TO DESIGN MAXIMUM SYSTEM

MAXIMUM PEAK HEATER-CATHODE VOLTAGE:		
HEATER NEGATIVE WITH RESPECT TO CATHODE	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	200 ^C	VOLTS
MAXIMUM PLATE VOLTAGE	330	VOLTS
MAXIMUM GRID #2 SUPPLY VOLTAGE	330	VOLTS
MAXIMUM GRID #2 VOLTAGE	SEE J5-C4	
MAXIMUM GRID #3 VOLTAGE	PIN #2 CONNECTED TO PIN #7 AT SOCKET	
MAXIMUM POSITIVE DC GRID #1 VOLTAGE	0	VOLTS
MAXIMUM NEGATIVE DC GRID #1 VOLTAGE	55	VOLTS
MAXIMUM PLATE DISSIPATION	3.4	WATTS
MAXIMUM GRID #2 DISSIPATION:		
FOR VOLTAGES UP TO 165 VOLTS	0.7	WATT
FOR VOLTAGES BETWEEN 165 & 330 VOLTS	SEE J5-C4	

^CTHE DC COMPONENT MUST NOT EXCEED 100 VOLTS.



TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

PLATE VOLTAGE	100	250	VOLTS
GRID #3 VOLTAGE	0	0	VOLTS
GRID #2 VOLTAGE	100	100	VOLTS
CATHODE BIAS RESISTOR	68	68	OHMS
PLATE RESISTANCE (APPROX.)	0.25	1.0	MEGOHM
TRANSCONDUCTANCE	4 300	4 400	μMHOS
PLATE CURRENT	10.8	11	MA.
GRID #2 CURRENT	4.4	4.2	MA.
GRID #1 VOLTAGE (APPROX.) FOR $G_m = 40 \mu MHOS$	-20	-20	VOLTS

→ INDICATES A CHANGE.

6BA6

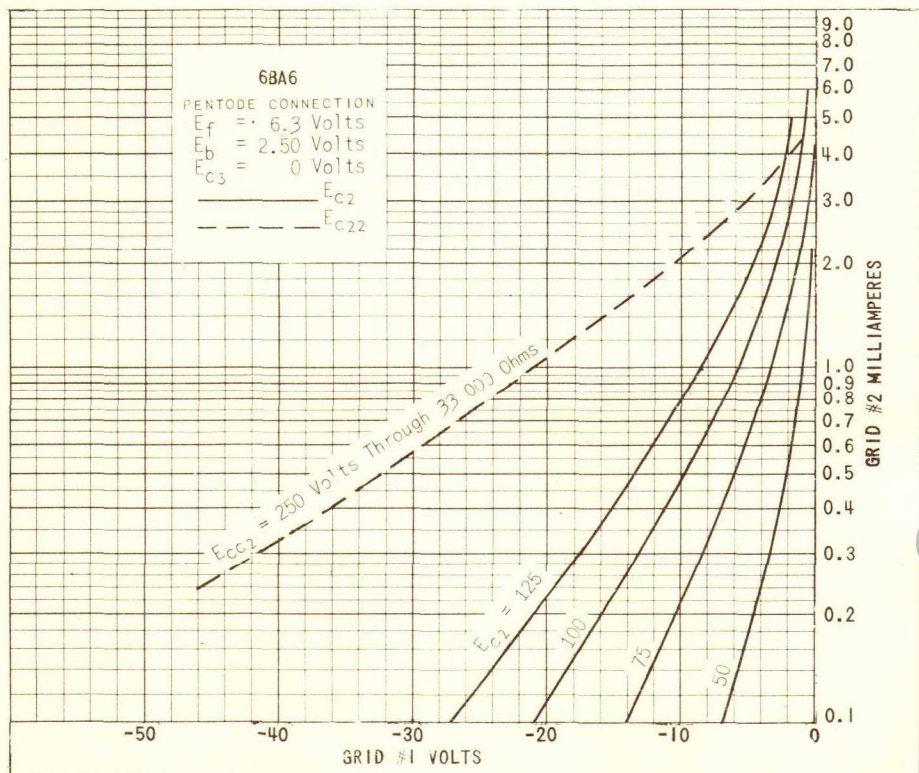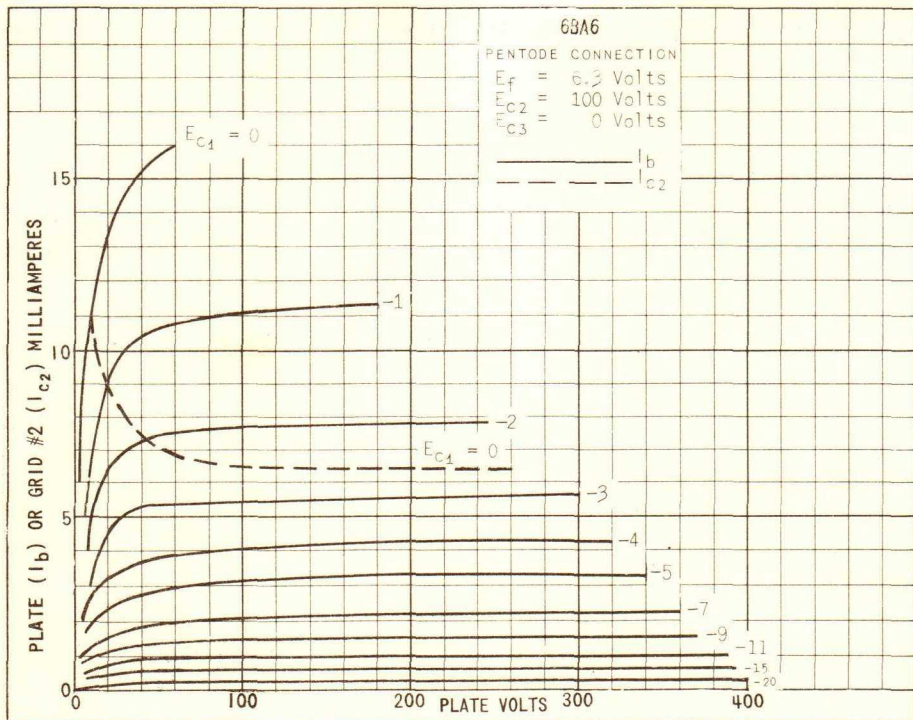

6BA6
PENTODE CONNECTION

$E_f = 6.3$ Volts

$E_b = 250$ Volts

$E_{c3} = 0$ Volts

— E_{c2}

- - - E_{cc2}

$E_{cc2} = 250$ Volts Through 33,000 Ohms

$E_{c1} = 125$

100

75

50

PLATE MILLIAMPERES

GRID VOLTS

6BA6

