


TUNG-SOL

DOUBLE TRIODE

SUBMINIATURE TYPE

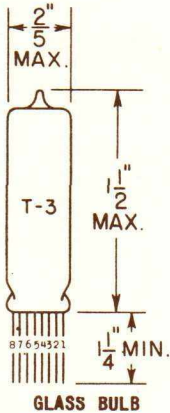


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

SUBMINIATURE BUTTON
8 FLEXIBLE LEADS

8DG

THE 6BF7 IS A GENERAL PURPOSE TRIODE IN THE SUBMINIATURE CONSTRUCTION. IT IS SIMILAR IN FUNCTION TO TYPE 6J6, BUT PROVIDES ADDED FLEXIBILITY FROM THE USE OF SEPARATE CATHODE LEADS AND THE COMPACTNESS OF THE SUBMINIATURE CONSTRUCTION.

DIRECT INTERELECTRODE CAPACITANCES

	WITH SHIELD ^A	WITHOUT SHIELD	
GRID TO PLATE (EACH SECTION)	1.5	1.5	μuf
INPUT (EACH SECTION)	2.0	2.0	μuf
OUTPUT:			
SECTION 1	1.6	0.28	μuf
SECTION 2	2.0	0.3	μuf
GRID TO GRID	0.008	0.009	μuf
PLATE TO PLATE	0.55	0.75	μuf

^AEXTERNAL SHIELD OF 0.405 INCH DIAMETER CONNECTED TO CATHODE.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD M8-210

DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	90	VOLTS
MAXIMUM PLATE VOLTAGE	110	VOLTS
MAXIMUM PLATE DISSIPATION (EACH SECTION)	1.0	WATT

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

EACH SECTION

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.3	AMP.
CATHODE BIAS RESISTOR	100	OHMS
PLATE CURRENT	8.0	MA.
AMPLIFICATION FACTOR	35	
TRANSCONDUCTANCE	4 800	μMHOS
PLATE RESISTANCE	7 000	OHMS
GRID VOLTAGE FOR 10 μAMP. PLATE CURRENT	-7.5	VOLTS

