



6BZ6

6BZ6

SEMIREMOTE-CUTOFF PENTODE

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3 $\pm$ 10%	volts
Current	0.3	amp

Direct Interelectrode Capacitances:

	Without External Shield	With External Shield ^o	
Grid No.1 to plate.	0.025 max.	0.015 max.	$\mu\mu\text{f}$
Grid No.1 to cathode, grid No.3 & internal shield, grid No.2, and heater	7	7	$\mu\mu\text{f}$
Plate to cathode, grid No.3 & internal shield, grid No.2, and heater.	2	3	$\mu\mu\text{f}$


Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	125	volts
Grid No.3	Connected to cathode at socket	
Grid-No.2 Supply Voltage.	125	volts
Cathode Resistor.	56	ohms
Plate Resistance (Approx.).	0.26	megohm
Transconductance.	8000	μmhos
Plate Current	14	ma
Grid-No.2 Current	3.6	ma
Grid-No.1 Voltage (Approx.) for trans- conductance (μmhos) = 50.	-19	volts
Grid-No.1 Voltage (Approx.) for trans- conductance (μmhos) = 700 and cathode resistor (ohms) = 0	-4.5	volts

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-1/8"
Maximum Seated Length.	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip).	1-1/2" $\pm$ 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	See General Section
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No.E7-1)
Basing Designation for BOTTOM VIEW.	7CM

Pin 1-Grid No.1
Pin 2-Cathode
Pin 3-Heater
Pin 4-Heater
Pin 5-Plate



Pin 6-Grid No.2
Pin 7-Grid No.3,
Internal
Shield

← Indicates a change.

6BZ6



6BZ6

SEMIREMOTE-CUTOFF PENTODE

AMPLIFIER — Class A₁

→ Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	330	max.	volts
GRID-No.3 (SUPPRESSOR-GRID) VOLTAGE . .	0	max.	volts
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE.	330	max.	volts
GRID-No.2 VOLTAGE	See Grid-No.2 Input Rating Chart at front of Receiving Tube Section		

GRID-No.1 (CONTROL-GRID) VOLTAGE:

Positive-bias value	0	max.	volts
-------------------------------	---	------	-------

GRID-No.2 INPUT:

For grid-No.2 voltages up to

165 volts	0.55	max.	watt
---------------------	------	------	------

For grid-No.2 voltages between 165

and 330 volts	See Grid-No.2 Input Rating Chart at front of Receiving Tube Section		
-------------------------	--	--	--

PLATE DISSIPATION	2.3	max.	watts
-----------------------------	-----	------	-------

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with

respect to cathode.	200	max.	volts
-----------------------------	-----	------	-------

Heater positive with

respect to cathode.	200 [▲]	max.	volts
-----------------------------	------------------	------	-------

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation.	0.25	max.	megohm
-----------------------------------	------	------	--------

For cathode-bias operation.	1	max.	megohm
-------------------------------------	---	------	--------

[○] With external shield JEDEC No.316 connected to cathode.[▲] The dc component must not exceed 100 volts.


→ Indicates a change.



6BZ6

6BZ6

AVERAGE CHARACTERISTICS

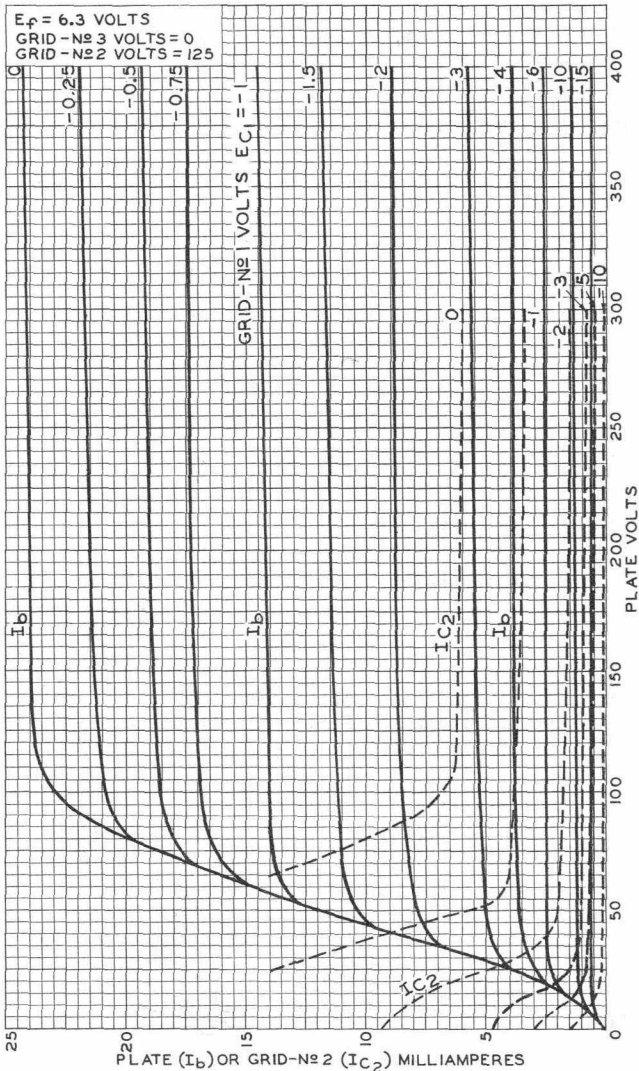


6BZ6



6BZ6

AVERAGE CHARACTERISTICS

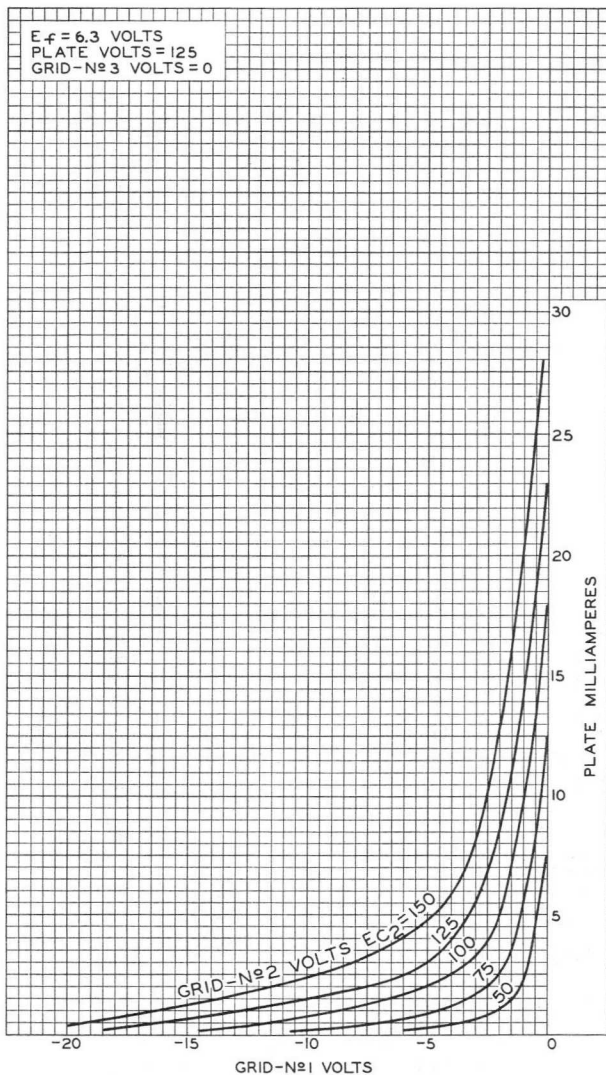




6BZ6

6BZ6

AVERAGE CHARACTERISTICS

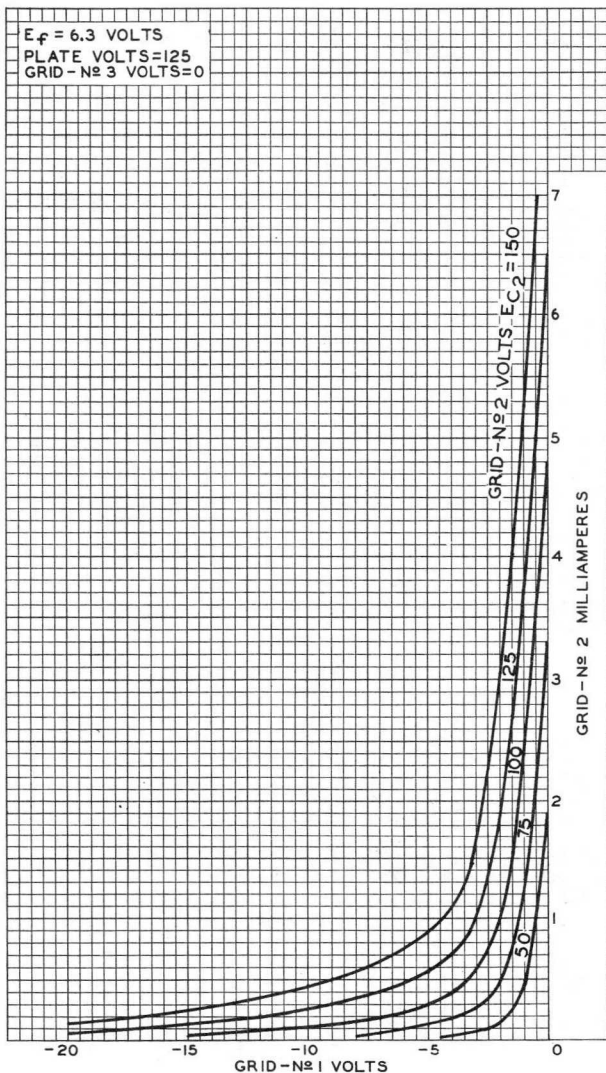

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9485RI

6BZ6



6BZ6

AVERAGE CHARACTERISTICS

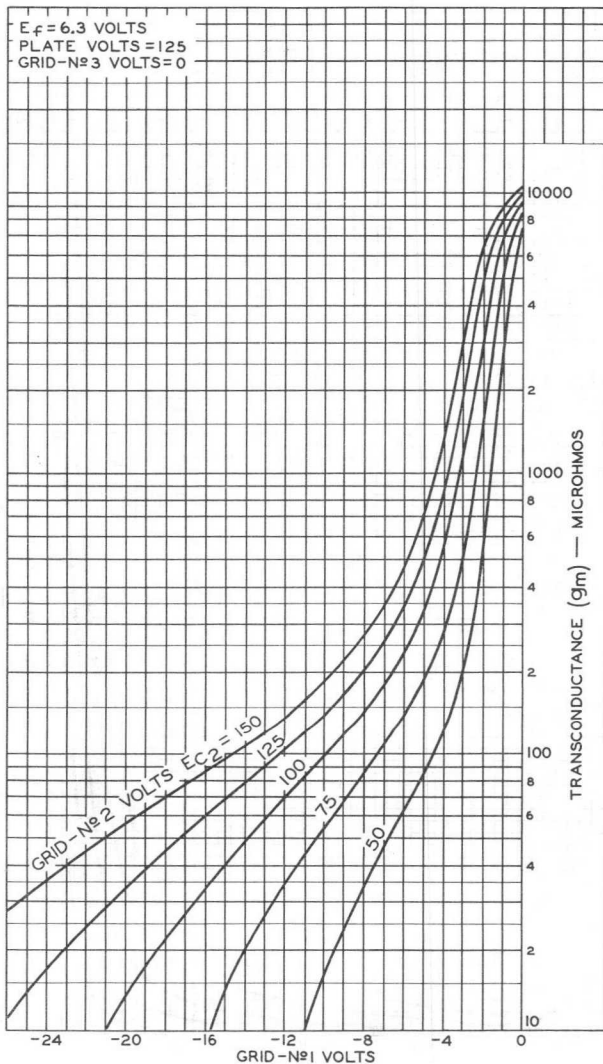

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-8509R1