

FOR TV VERTICAL-DEFLECTION AMPLIFIER APPLICATIONS

DESCRIPTION AND RATING

The 6CK4 is a low-mu triode designed for use as the vertical-deflection amplifier in television receivers.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Voltage, AC or DC..... $6.3 \pm 10\%$ Volts

Heater Current.....1.25 Amperes

Direct Interelectrode Capacitances*

Grid to Plate.....6.5 μf

Input.....8.0 μf

Output.....1.8 μf

MECHANICAL

Mounting Position—Any

Envelope—T-9, Glass

Base—B6-60, Short Intermediate-Shell Octal 6-Pin

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES UNLESS OTHERWISE INDICATED

	Vertical- Deflection Amplifier†
DC Plate Voltage.....	550 Volts
Peak Positive Pulse Plate Voltage.....	2000‡ Volts
Peak Negative Grid Voltage.....	250 Volts
Plate Dissipation.....	12§ Watts
DC Cathode Current.....	100 Milliamperes
Peak Cathode Current.....	350 Milliamperes
Heater-Cathode Voltage	
Heater Positive with Respect to Cathode	
DC Component.....	100 Volts
Total DC and Peak.....	200 Volts
Heater Negative with Respect to Cathode	
Total DC and Peak.....	200 Volts
Grid Circuit Resistance	
With Cathode Bias.....	2.2 Megohms


Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey tube of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, taking responsibility for the effects of changes in operating conditions due to variations in tube characteristics.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

BASING DIAGRAM




KEY

EIA 8JB

TERMINAL CONNECTIONS

Pin 1—Grid
Pin 2—Heater
Pin 3—Grid
Pin 5—Plate
Pin 7—Heater
Pin 8—Cathode

PHYSICAL DIMENSIONS



EIA 9-43

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS

Plate Voltage.....	100	250	250	Volts
Grid Voltage.....	0†	-38	-28	Volts
Amplification Factor.....			6.6	
Plate Resistance, approximate.....			1200	Ohms
Transconductance.....			5500	Micromhos
Plate Current.....	125	10	40	Milliamperes
Grid Voltage, approximate I _b = 0.5 Milliamperes.....			-50	Volts

* Without external shield.


† For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.

‡ Value given is to be considered as an Absolute Maximum rating. In this case, the combined effect of supply voltage variation, manufacturing variation including components in the equipment, and adjustment of equipment controls should not cause the rated value to be exceeded.


§ In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.

¶ Applied for short interval (two seconds maximum) so as not to damage tube.

AVERAGE PLATE CHARACTERISTICS

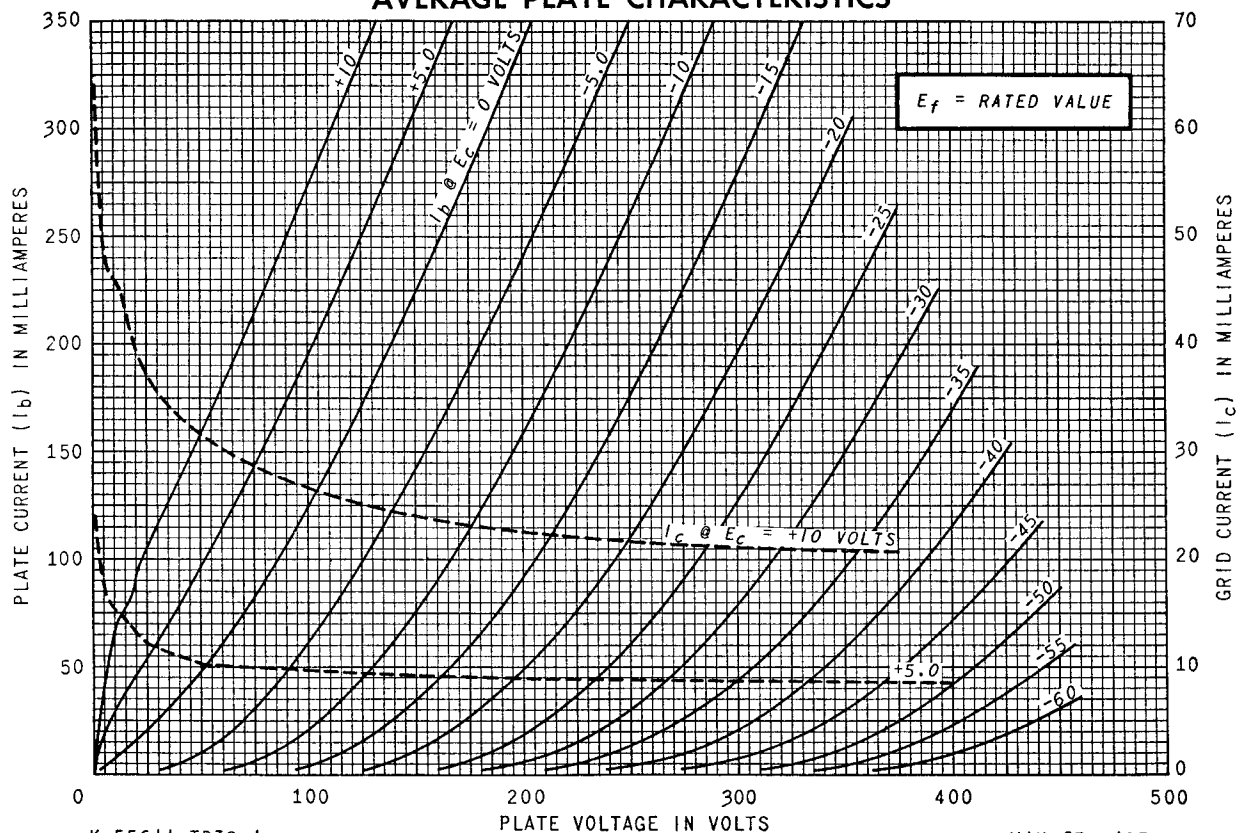

AVERAGE TRANSFER CHARACTERISTICS

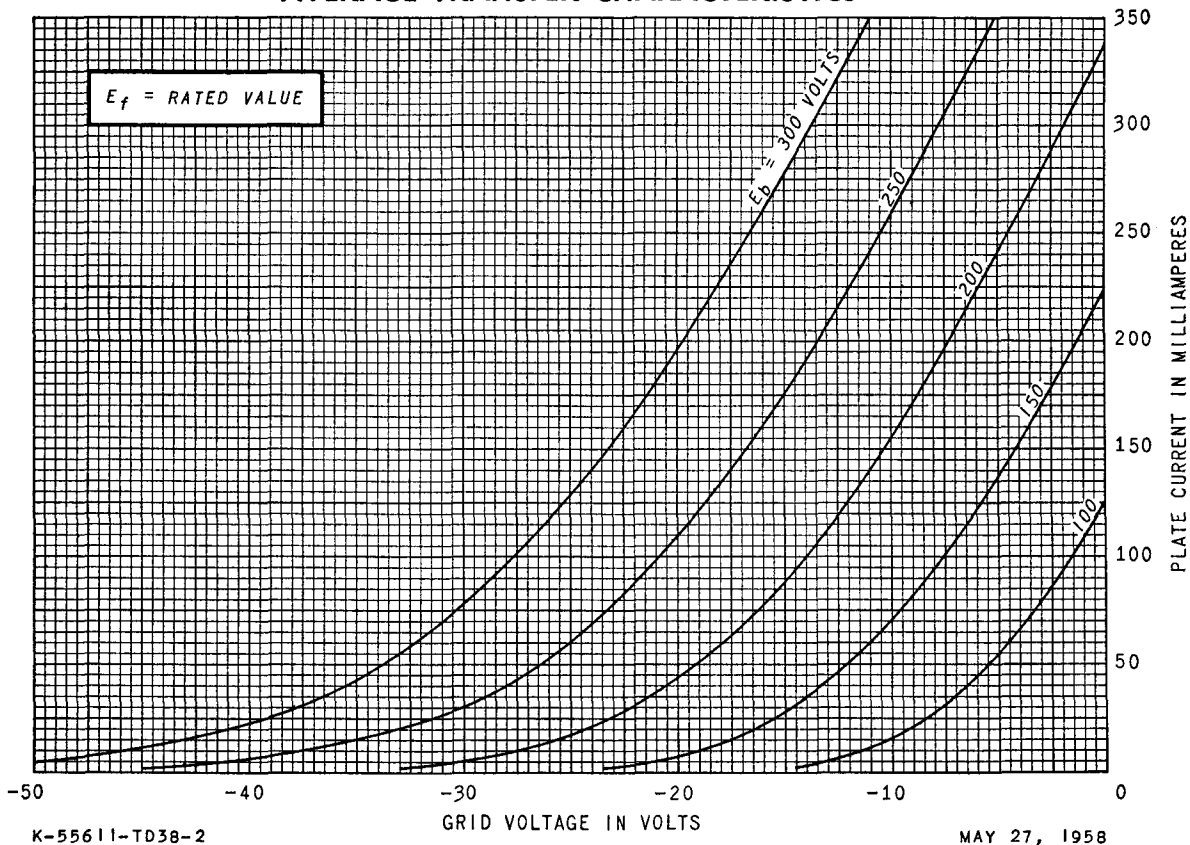

AVERAGE CHARACTERISTICS

