

TRIODE-PENTODE FOR VHF CONVERTER APPLICATIONS

DESCRIPTION AND RATING

The 6EA8 is a miniature tube which contains a sharp-cutoff pentode and a triode in one envelope. Each section has a separate cathode and is electrically independent. The tube is primarily intended for service as a combined triode oscillator and pentode mixer in television receivers. Incorporation of a controlled heater warm-up characteristic makes the tube especially suited for use in television receivers that employ series-connected heaters.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Voltage, AC or DC 6.3 Volts

Heater Current $0.45 \pm 6\%$ Amperes

Heater Warm-up Time* 11 Seconds

Direct Interelectrode Capacitances

With Shield†

Without Shield

Pentode Section

Grid-Number 1 to Plate: (Pg1 to Pp) maximum .001 0.02 μf

Input: Pg1 to (h+Pk+Pg2+Pg3+i.s.) 5.0 μf

Output: Pp to (h+Pk+Pg2+Pg3+i.s.) 3.4 μf

Heater to Cathode: (Pk to h) 3.0 μf

Triode Section

Grid to Plate (Tg to Tp) 1.7 μf

Input: Tg to (Tk+h+Pk+Pg3+i.s.) 3.2 μf

Output: Tp to (Tk+h+Pk+Pg3+i.s.) 1.9 μf

Heater to Cathode: (Tk to h) 3.0 μf


MECHANICAL

Mounting Position—Any

Envelope—T-6½, Glass

Base—E9-1, Small Button 9-Pin

BASING DIAGRAM




EIA 9AE

TERMINAL CONNECTIONS

- Pin 1—Triode Plate
- Pin 2—Pentode Grid Number 1
- Pin 3—Pentode Grid Number 2 (Screen)
- Pin 4—Heater
- Pin 5—Heater
- Pin 6—Pentode Plate
- Pin 7—Pentode Cathode, Grid Number 3 and Internal Shield
- Pin 8—Triode Cathode
- Pin 9—Triode Grid

PHYSICAL DIMENSIONS



EIA 6-2

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES

	Pentode Section	Triode Section
Plate Voltage	330	330 Volts
Screen Supply Voltage	330	... Volts
Screen Voltage—See Screen Rating Chart		
Positive DC Grid-Number 1 Voltage	0	0 Volts
Plate Dissipation	3.1	3.0 Watts
Screen Dissipation	0.55	... Watts
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component	100	100 Volts
Total DC and Peak	200	200 Volts
Heater Negative with Respect to Cathode		
Total DC and Peak	200	200 Volts

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey tube of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, taking responsibility for the effects of changes in operating conditions due to variations in tube characteristics.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, and environmental conditions.

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS

	Pentode Section	Triode Section
Plate Voltage	125	150 Volts
Screen Voltage	125	... Volts
Grid-Number 1 Voltage	−1.0	...
Cathode-Bias Resistor	...	56 Ohms
Amplification Factor	...	40
Plate Resistance, approximate	80000	5000 Ohms
Transconductance	6400	8500 Micromhos
Plate Current	12	18 Milliamperes
Screen Current	4.0	... Milliamperes
Grid-Number 1 Voltage, approximate		
I _b = 10 Microamperes	−9	−12 Volts


* The time required for the voltage across the heater to reach 80 percent of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the rated heater voltage divided by the rated heater current.

† With external shield (EIA 315) connected to cathode of section under test unless otherwise indicated.

‡ With external shield (EIA 315) connected to ground.


SCREEN RATING CHART

PENTODE SECTION

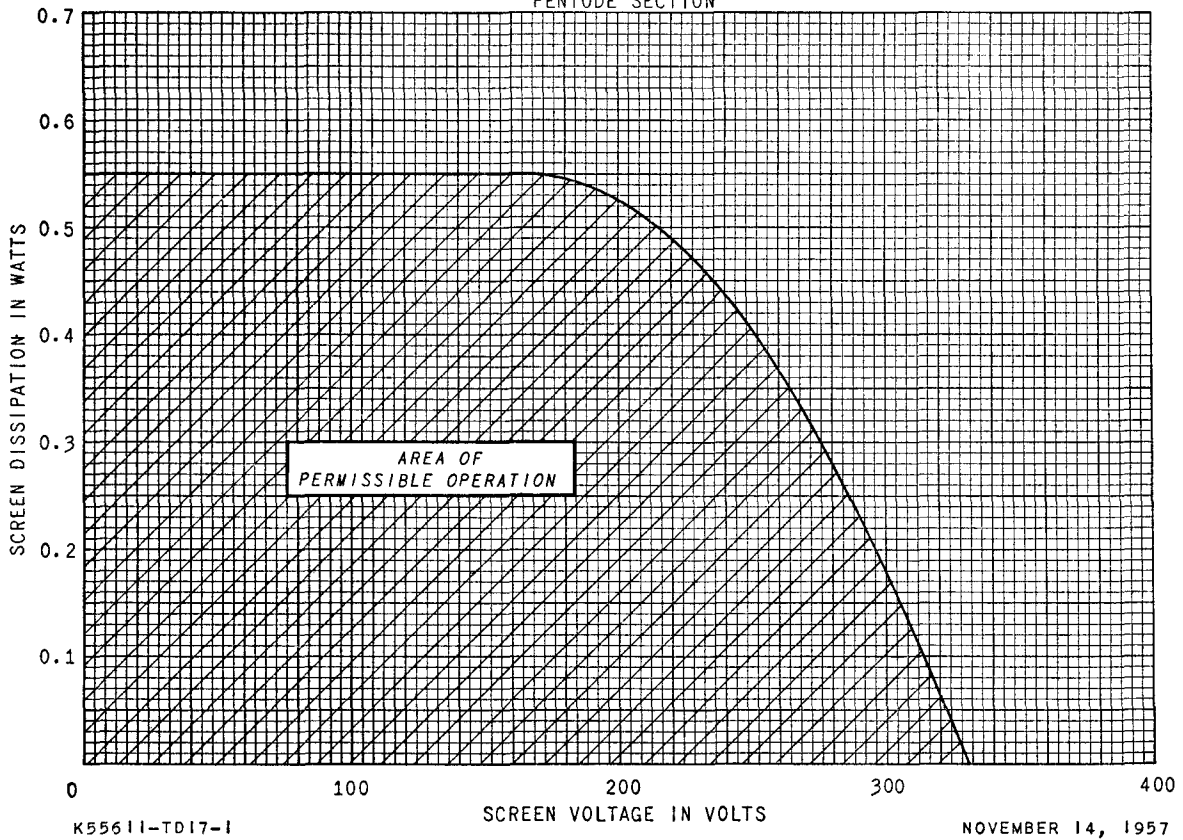


AVERAGE PLATE CHARACTERISTICS

PENTODE SECTION

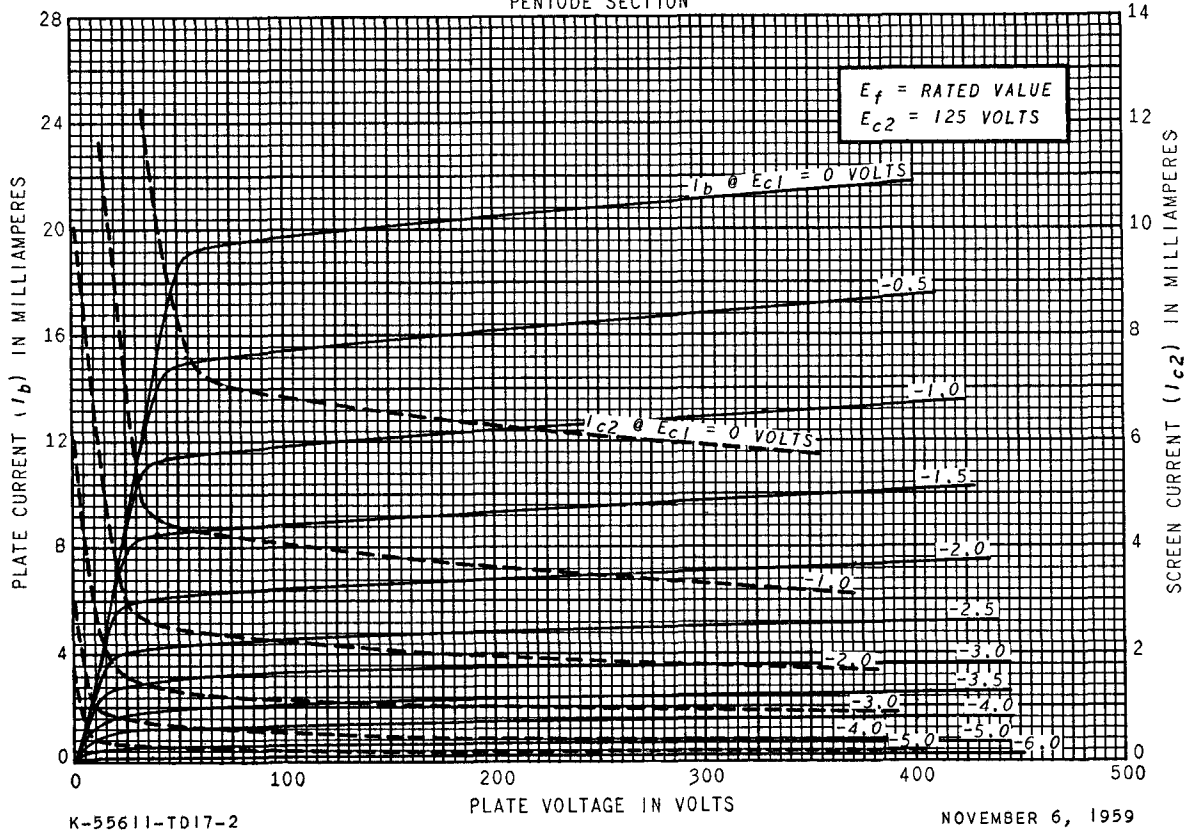

AVERAGE PLATE CHARACTERISTICS


PENTODE SECTION

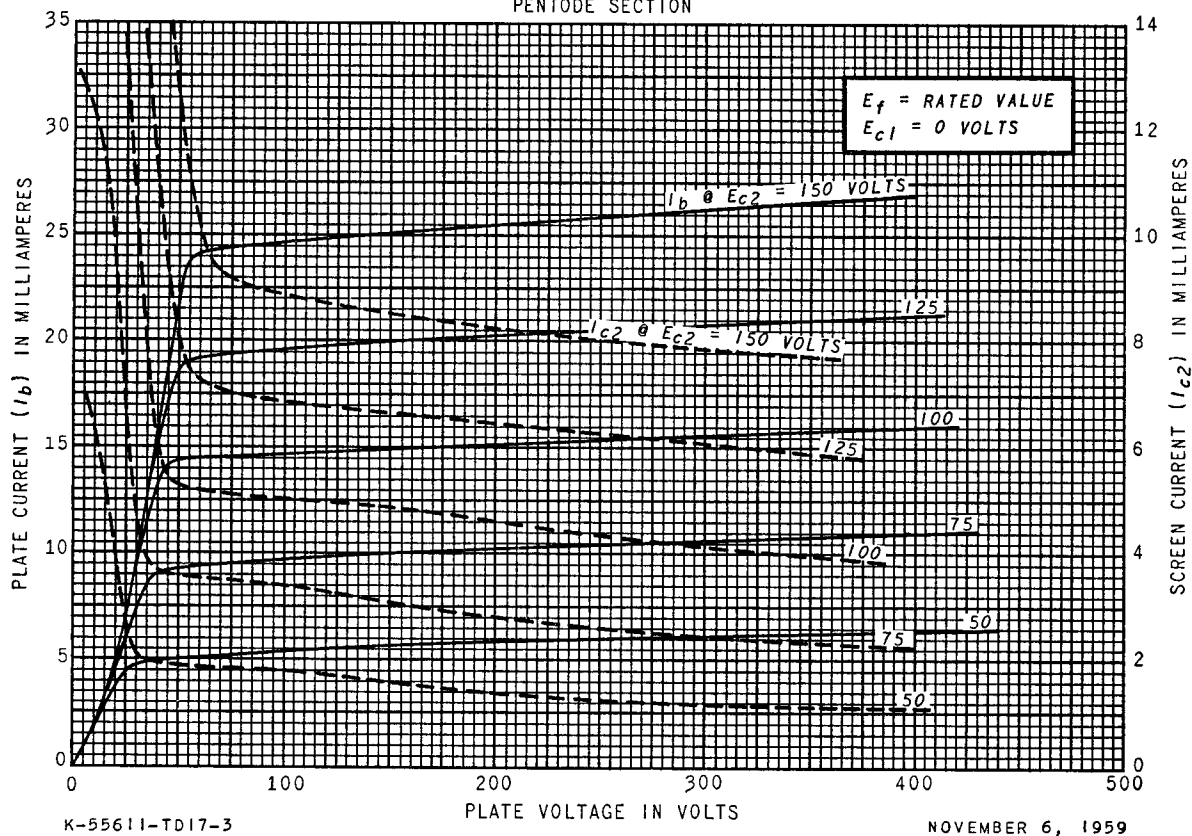

NOVEMBER 6, 1959


AVERAGE TRANSFER CHARACTERISTICS

PENTODE SECTION

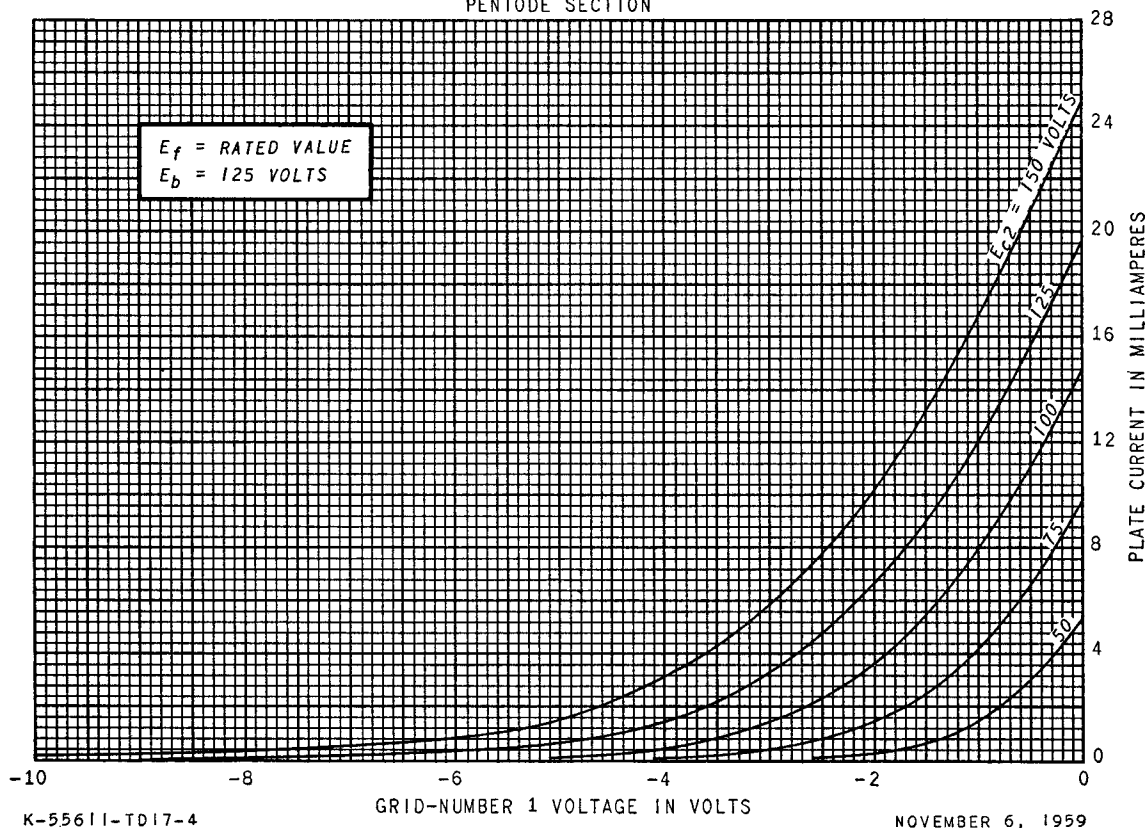


NOVEMBER 6, 1959

AVERAGE TRANSFER CHARACTERISTICS PENTODE SECTION

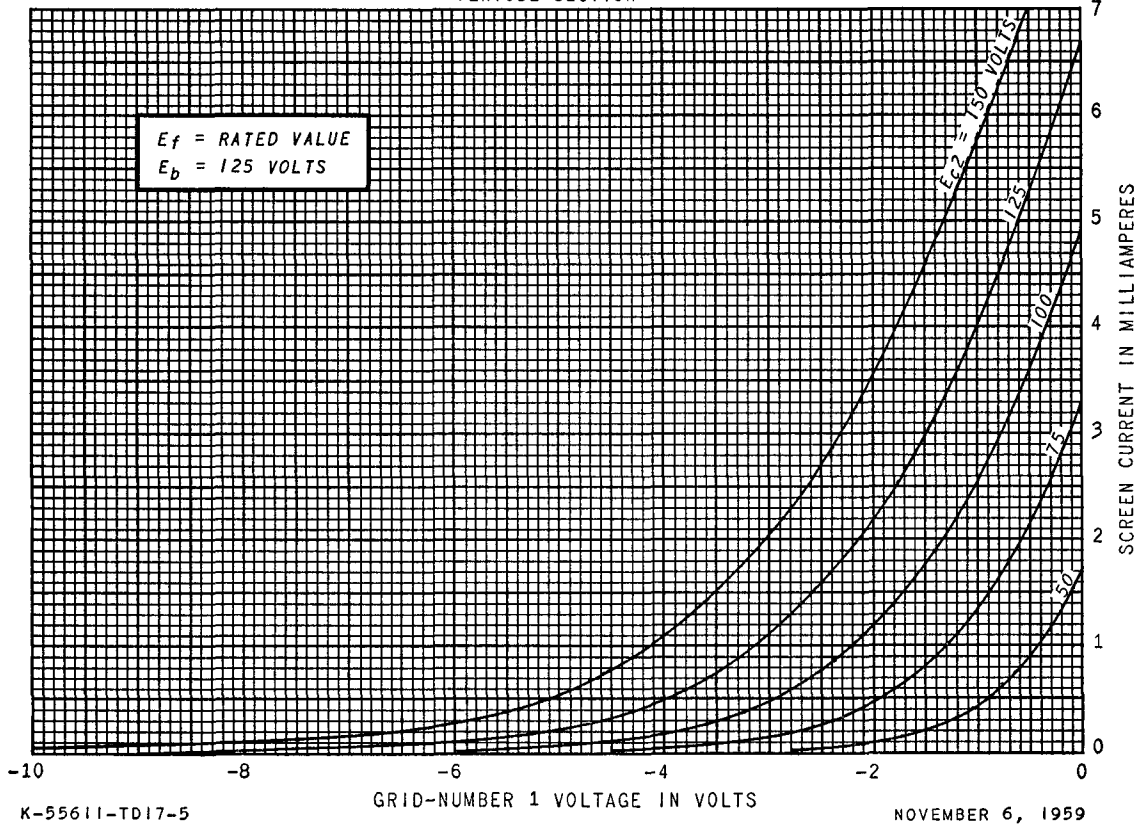


AVERAGE TRANSFER CHARACTERISTICS PENTODE SECTION

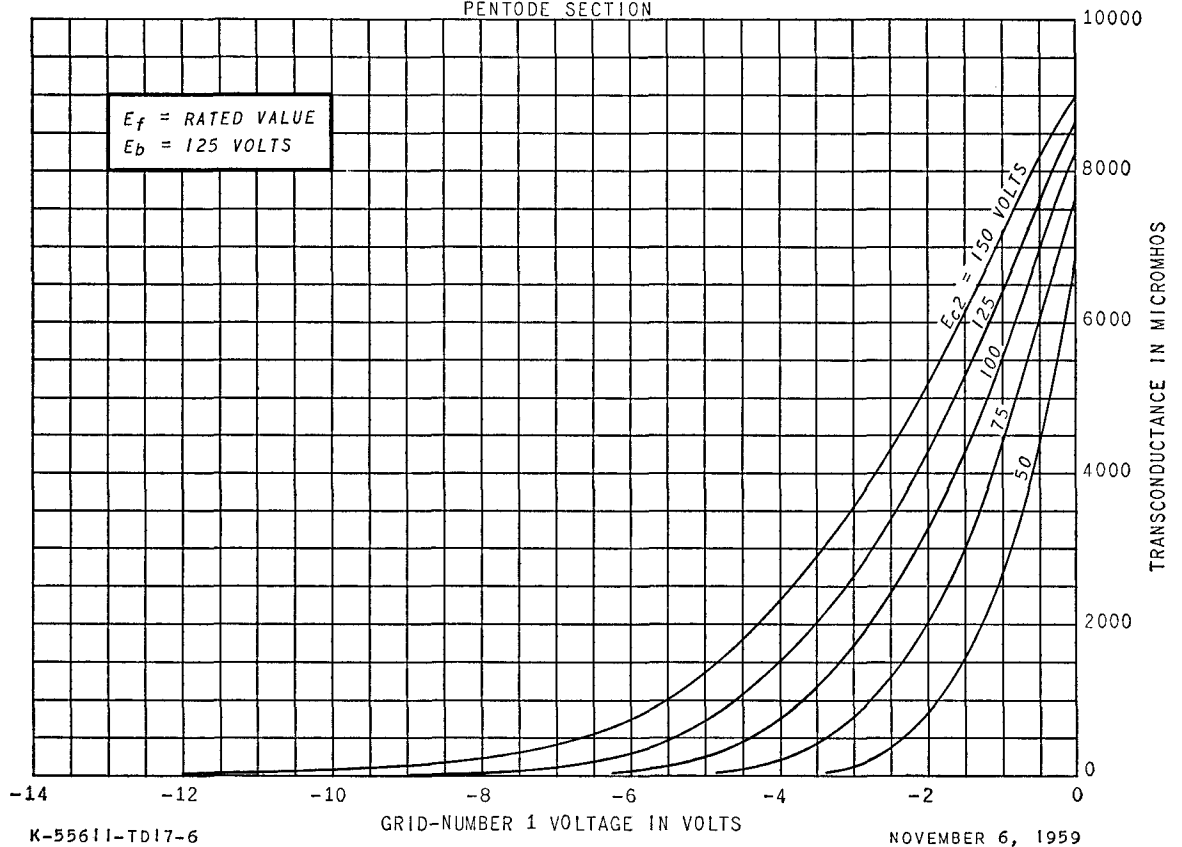

AVERAGE PLATE CHARACTERISTICS

TRIODE SECTION

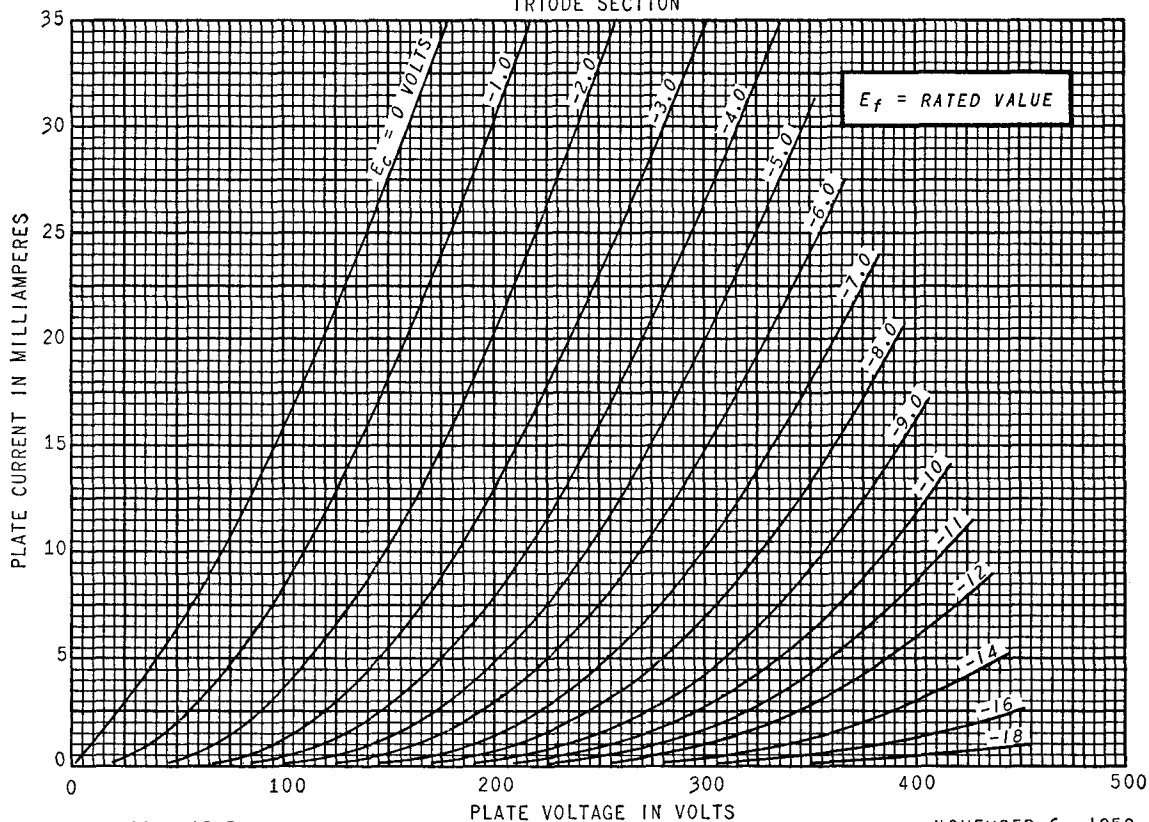


K-55611-TD17-7

NOVEMBER 6, 1959

AVERAGE TRANSFER CHARACTERISTICS

TRIODE SECTION

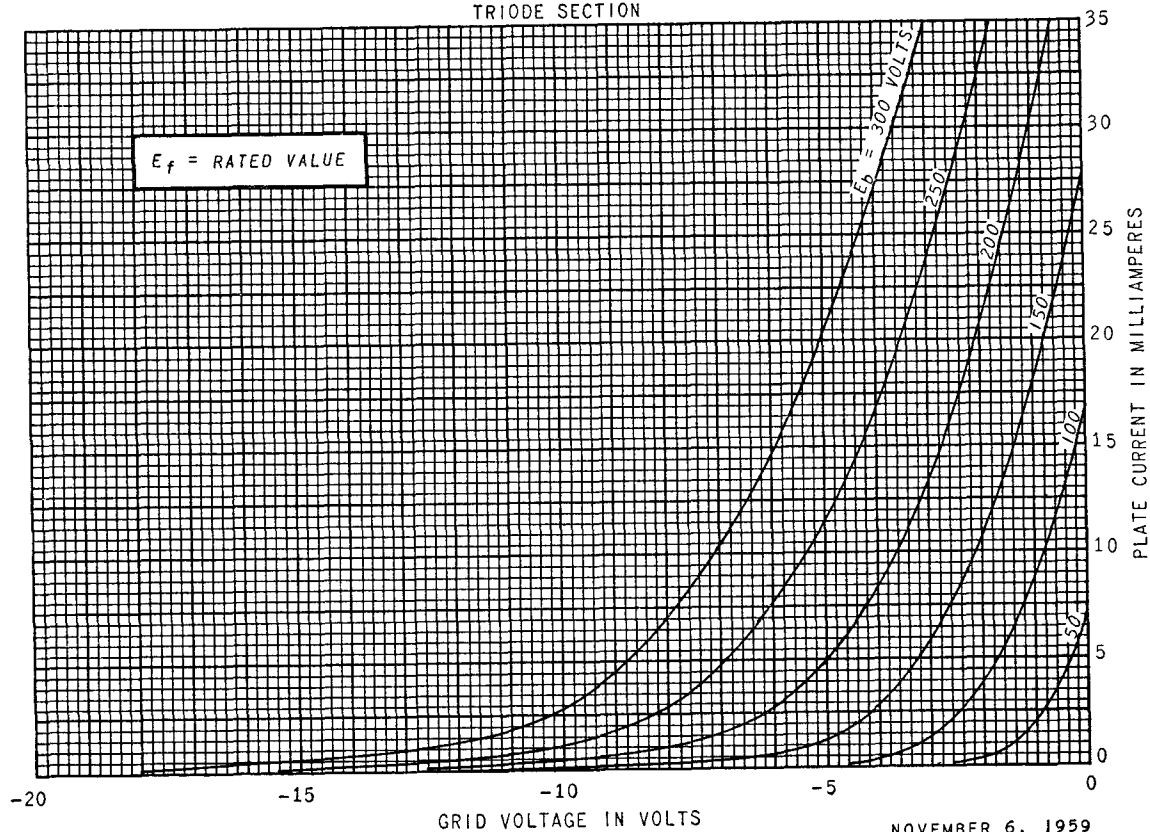


K-55611-TD17-8

NOVEMBER 6, 1959

AVERAGE CHARACTERISTICS

TRIODE SECTION

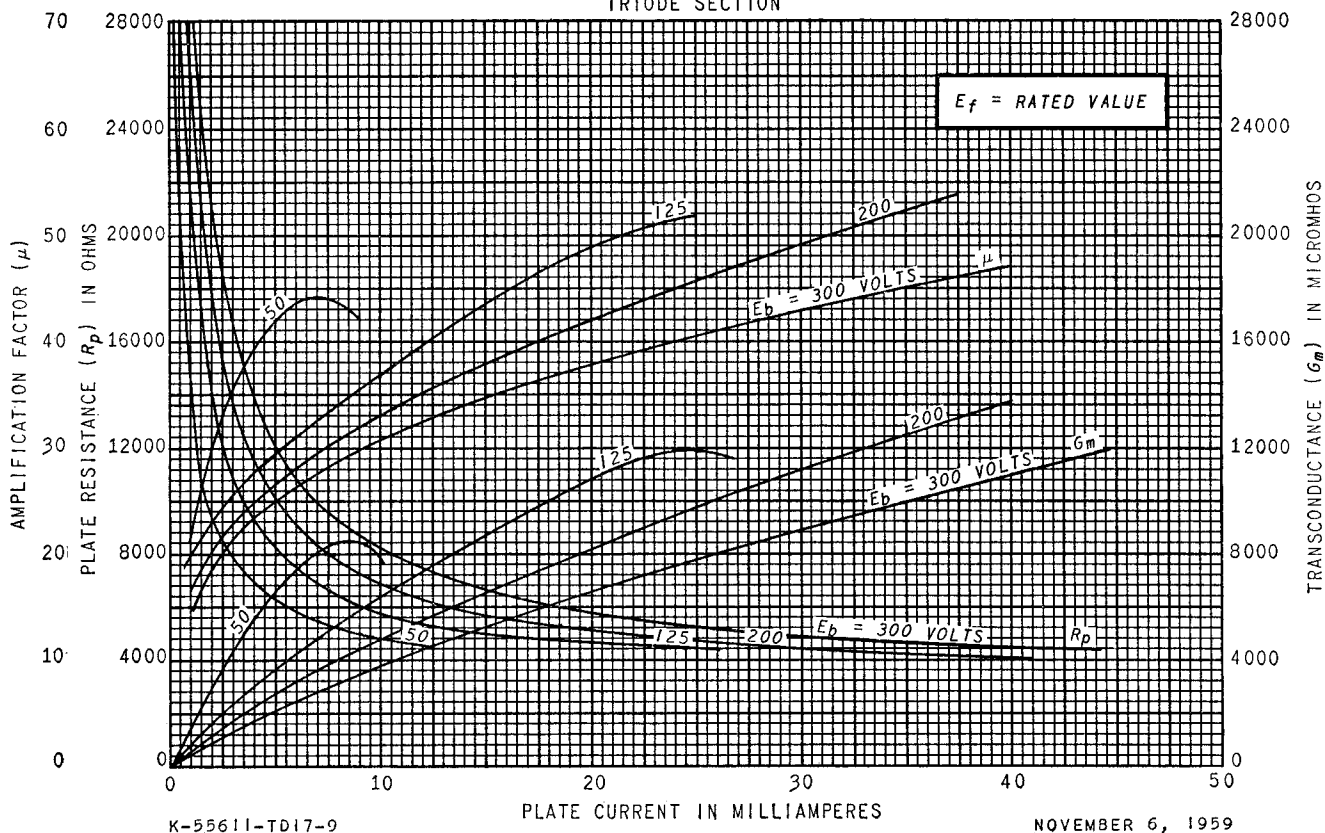

K-55611-TD17-9

NOVEMBER 6, 1959