

DESCRIPTION AND RATING

The 6EU7 is a miniature, high-mu, twin triode primarily designed for use in low-level stages of high-gain audio-frequency amplifiers. Isolation of the heater pins in the new basing employed and inherent low hum properties make use of the 6EU7 in this application advantageous.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential	
Heater Characteristics and Ratings	
Heater Voltage, AC or DC*	6.3 $\pm$ 0.6 Volts
Heater Current†	0.3 Amperes
Direct Interelectrode Capacitances‡	
Grid to Plate, Each Section: (g to p)	1.5 pf
Input, Each Section: g to (h + k)	1.6 pf
Output, Each Section: p to (h + k)	0.2 pf

MECHANICAL

Mounting Position—Any	
Envelope—T-6 $\frac{1}{2}$, Glass	
Base—E9-1, Small Button 9-Pin	
Outline Drawing—EIA 6-2	
Maximum Diameter	$\frac{7}{8}$ Inch
Maximum Over-all Length	2 $\frac{3}{16}$ Inches
Maximum Seated Height	1 $\frac{15}{16}$ Inches

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES, EACH SECTION

Plate Voltage	330 Volts
Positive DC Grid Voltage	0 Volts
Negative DC Grid Voltage	55 Volts
Plate Dissipation	1.2 Watts

Heater-Cathode Voltage


Heater Positive with Respect to Cathode	
DC Component	100 Volts
Total DC and Peak	200 Volts
Heater Negative with Respect to Cathode	
Total DC and Peak	200 Volts

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS




EIA 6-2

TERMINAL CONNECTIONS

- Pin 1—Heater
- Pin 2—Heater
- Pin 3—No Connection
- Pin 4—Cathode (Section 2)
- Pin 5—Grid (Section 2)
- Pin 6—Plate (Section 2)
- Pin 7—Plate (Section 1)
- Pin 8—Grid (Section 1)
- Pin 9—Cathode (Section 1)

BASING DIAGRAM



EIA 9LS

CHARACTERISTICS AND TYPICAL OPERATION

Class A₁ Amplifier, Each Section

Plate Voltage.....	100	250	Volts
Grid Voltage.....	-1.0	-2.0	Volts
Amplification Factor.....	100	100	
Plate Resistance, approximate.....	80000	62500	Ohms
Transconductance.....	1250	1600	Micromhos
Plate Current.....	0.5	1.2	Milliamperes
Equivalent Noise and Hum Voltage, Each Section, Average, True RMS§	1.8		Microvolts

* The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.

† Heater current of a bogey tube at $E_f = 6.3$ volts.


‡ Without external shield.

§ Referred to grid and measured under the following conditions: $E_f = 6.3$ volts AC, CT of heater transformer grounded; $E_{bb} = 250$ volts; $R_b = 100000$ ohms; $R_k = 2700$ ohms, bypassed by $100 \mu f$; $R_g = 0$ ohms; Amplifier frequency range = 25 to 1000 cps.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or

elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.


AVERAGE PLATE CHARACTERISTICS

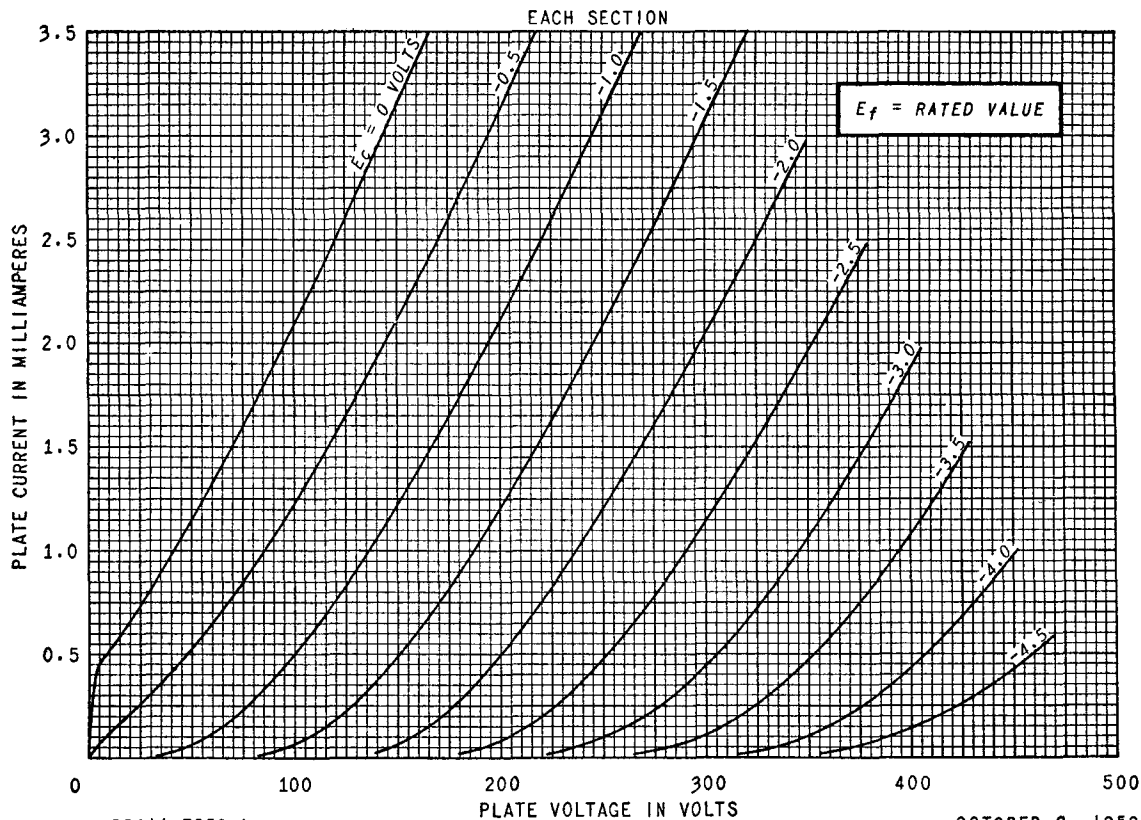


K-55611-TD50-1

OCTOBER 2, 1958

AVERAGE PLATE CHARACTERISTICS

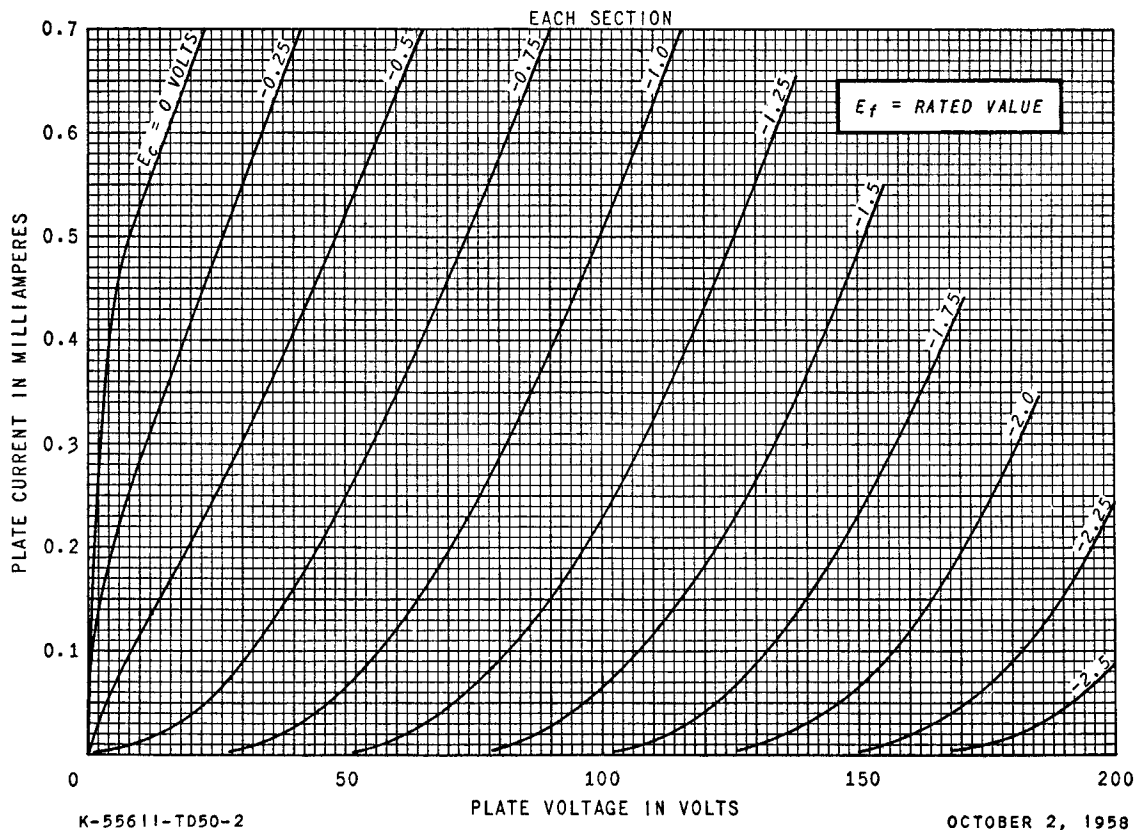


AVERAGE TRANSFER CHARACTERISTICS

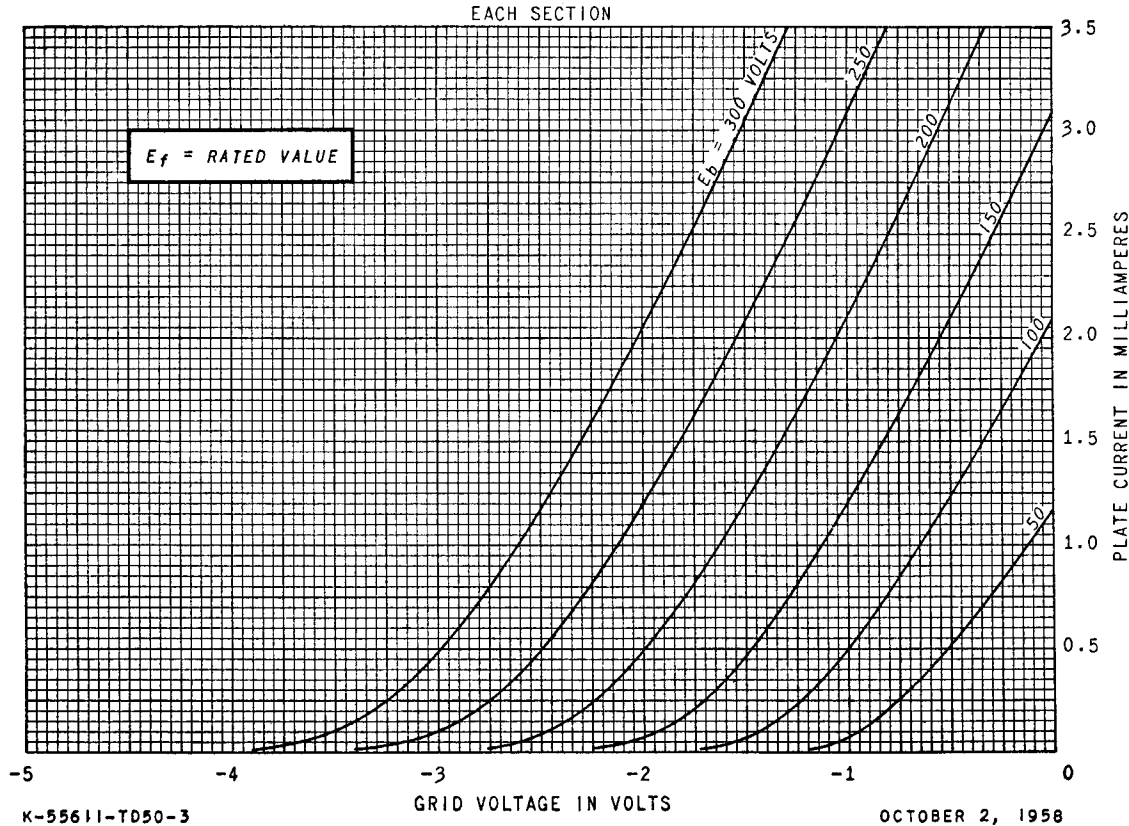

AVERAGE CHARACTERISTICS

EACH SECTION

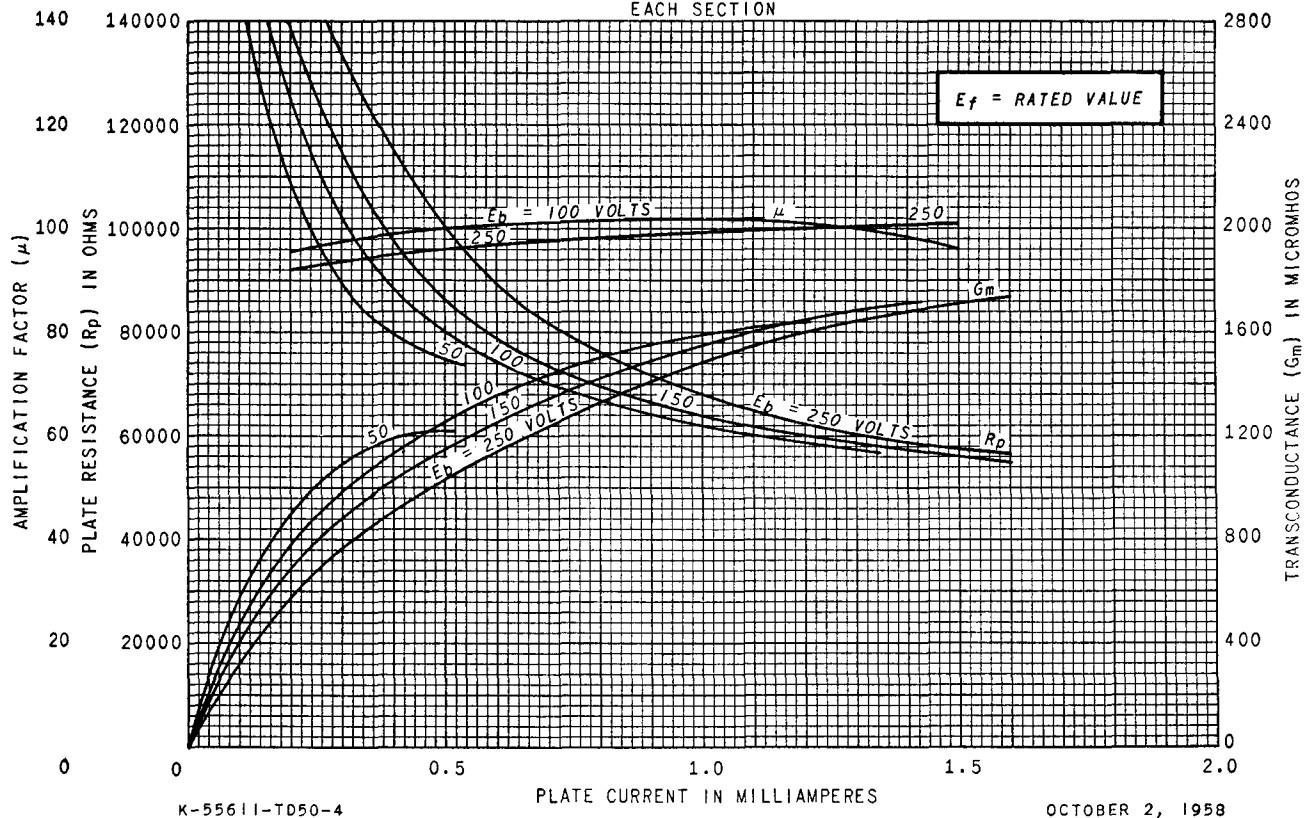

RECEIVING TUBE DEPARTMENT

GENERAL ELECTRIC

Owensboro, Kentucky