

EDISWAN

MAZDA

6FI

HIGH SLOPE SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

REPLACEMENT TYPE

6FI



RATING

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	0.35
Maximum Anode Voltage (volts)	$V_a(\text{max})$	250
Maximum Screen Voltage (volts)	$V_{g2}(\text{max})$	250
Mutual Conductance (mA/V)	g_m	9.0§
Maximum Anode Dissipation (watts)	$P_a(\text{max})$	3.5†
Maximum Screen Dissipation (watts)	$P_{g2}(\text{max})$	1.0†
Maximum Potential Heater/Cathode (volts DC)	$V_{(h-k)\text{max}}$	150

§ Taken at $V_a = V_{g2} = 200V$; $V_{g1} = -1.8V$.

† With grid cathode resistance not exceeding 10,000 ohms.

INTER-ELECTRODE CAPACITANCES (pF)

		*	¶	‡
Anode/Earth	C_{out}	4.6	6.1	—
Anode/Control Grid	C_{a-g1}	—	.0077	.0068
Control Grid/Earth	C_{in}	9.0	10.5	—

* Inter-Electrode capacitances with holder capacitance balanced out.

¶ Total capacitances including Benjamin B8A moulded holder measured at 1 Mc/s.

‡ Total capacitances including Benjamin B8A moulded holder measured at 1 Mc/s but with extra perpendicular shield.

DIMENSIONS

Maximum Overall Length	(mm)	67
Maximum Diameter	(mm)	22
Maximum Seated Height	(mm)	54
Radius over Location Key	(mm)	12.25

Indicates a change ←

January 1959

VALVE & CRT DIVISION

Issue 3/2A

SIEMENS EDISON SWAN LIMITED

6F1

EDISWAN

MAZDA

6F1

HIGH SLOPE SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

REPLACEMENT TYPEMOUNTING POSITION—Unrestricted.TYPICAL OPERATION—As Amplifier

Anode Voltage (volts)	V_a	—	200	190	208
Screen Voltage (volts)	V_{g2}	240*	200	190	208
Grid Bias Voltage (volts-ve)	V_{g1}	1.45	1.8	1.55	1.9
Anode Current (mA)	I_a	20.3*	10.0	10.3	10.15
Screen Current (mA)	I_{g2}	5.6*	2.60	2.7	2.65
Mutual Conductance (mA/V)	g_m	—	9.0	9.25	8.95
Input Capacity, Working (pF)	$\ddagger \S C_{in(w)}$	—	12.1	12.25	12.1
Change in input capacity produced by biasing valve to $1 \mu A/V$ (pF)	$\ddagger \Delta C_{in(w)}$	—	2.75	2.9	2.7
Self Bias Resistance (ohms)	R_{k-E}	56	—	120	150
Input Loss at 45 Mc/s (ohms)	$\phi r_{g1-k(w)}$	—	14000	12500	14000
Equivalent Grid Noise Resistance (ohms)	r_{eq}	—	780	750	790

* Maximum permissible rating D.C. connected as Video Output Valve. (no signal)

§ Inter-Electrode capacitance with holder capacitance balanced out.

‡ Hot capacity measurements taken at a frequency of 0.5 Mc/s.

φ Measured with grid circuit decoupled to cathode pin 7. Screen and Anode circuits and shield returned to cathode pin 5.

Indicates a change



January 1959

VALVE & CRT DIVISION

Issue 3/2A

SIEMENS EDISON SWAN LIMITED

EDISWAN

MAZDA

6FI

HIGH SLOPE SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

REPLACEMENT TYPE

6FI


TYPICAL OPERATION—As Frequency Changer

Control Grid or Cathode Injection.

Anode Voltage (volts)	V_a	250
Screen Supply Voltage (volts)	V_{g2}	250
Screen Dropping Resistor (ohms)	R_{g2}	100,000
Grid 1 Resistor for grid current bias (ohms)	R_{g1}	100,000
Heterodyne Peak Voltage (volts)	$V(\text{het})_{pk}$	2.0
Anode Current (mA)	I_a	5.2
Screen Current (mA)	I_{g2}	1.3
Grid 1 Current (μA)	I_{g1}	18
Conversion Conductance (mA/V)	g_c	3.3

BULB—Clear.

BASE—B8A.



Viewed from free end of pins

CONNECTIONS

Pin 1	Heater	h
Pin 2	Anode	a
Pin 3	Internal Shield & Suppressor	g3,s
Pin 4	Screen Grid	g2
Pin 5	Cathode	k
Pin 6	Control Grid	g1
Pin 7	Cathode	k
Pin 8	Heater	h

Indicates a change ←

January 1959

VALVE & CRT DIVISION

Issue 3/2A

SIEMENS EDISON SWAN LIMITED

6F1

EDISWAN

MAZDA


6F1

HIGH SLOPE SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

REPLACEMENT TYPE

AVERAGE CHARACTERISTIC CURVES

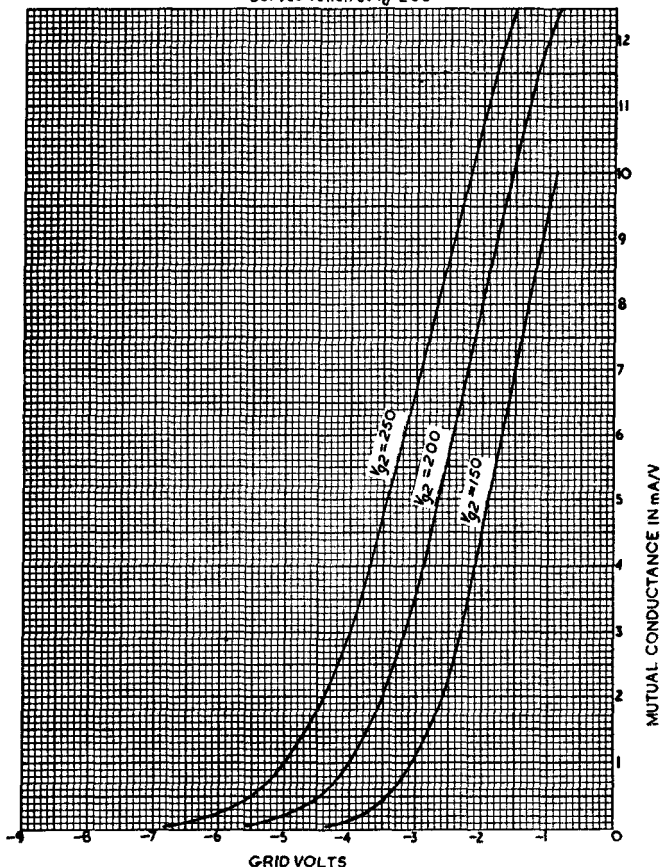Curves taken at $V_a = 250$ 

Indicates a change

January 1959

VALVE & CRT DIVISION

Issue 3/2A

SIEMENS EDISON SWAN LIMITED

EDISWAN

MAZDA

6FI


HIGH SLOPE SCREENED R.F. PENTODE
Indirectly heated—for parallel operation

REPLACEMENT TYPE

6FI

AVERAGE CHARACTERISTIC CURVES

Curves taken at $V_0 = 250$

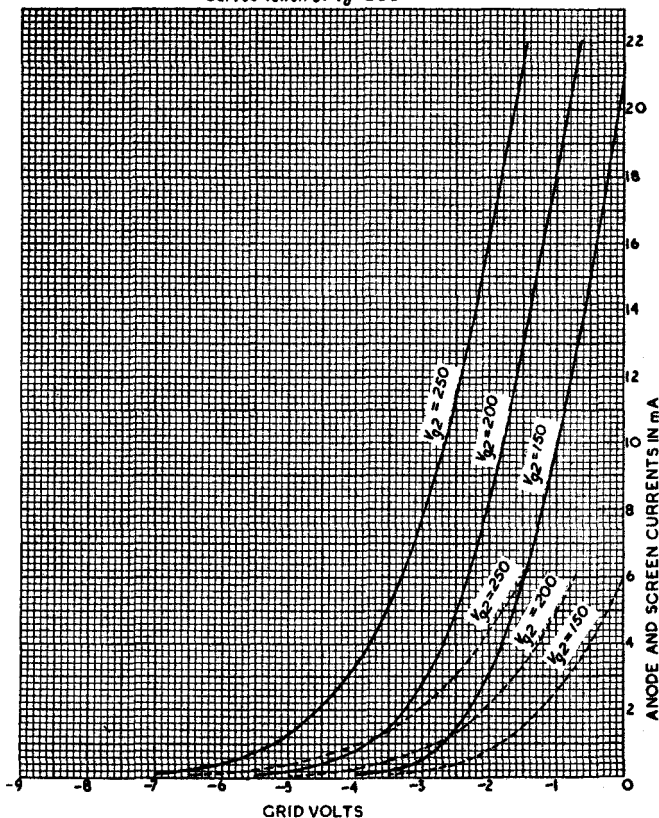

Indicates a change

January 1959

VALVE & CRT DIVISION

Issue 2/2A

SIEMENS EDISON SWAN LIMITED

6FI


EDISWAN

MAZDA

6FI

HIGH SLOPE SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

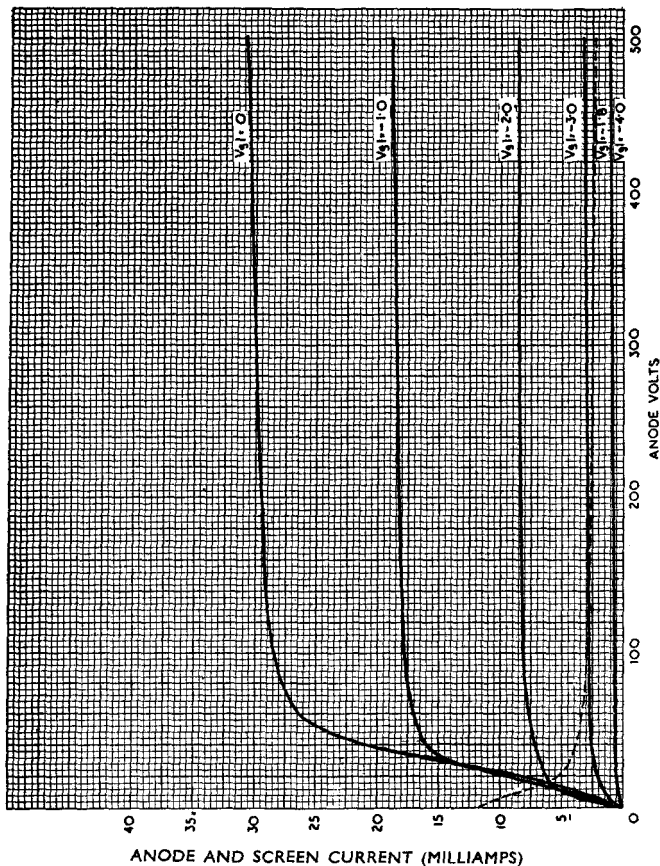REPLACEMENT TYPE**AVERAGE CHARACTERISTIC CURVES**CURVES TAKEN AT $V_{g2}=200$ 

Indicates a change



January 1959

VALVE & CRT DIVISION

Issue 2/2A

SIEMENS EDISON SWAN LIMITED