

MAZDA**6 F 32****6 F 32****SCREENED R.F. PENTODE****Indirectly heated—for parallel operation****REPLACEMENT TYPE**GENERAL

The 6 F 32 has a short cut off Suppressor Grid characteristic which makes it particularly suitable for use in Modulator, Variable Reactance and Timing Circuits.

RATING

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	0.63
Maximum Anode Voltage (volts)	$V_a(\max)$	250
Maximum Screen Voltage (volts)	$V_{g2}(\max)$	200
Mutual Conductance (mA/V)	g_m	• 3.35
Inner μ	$\mu_{g1}-\mu_{g2}$	• 38
Maximum Anode Dissipation (watts)	$P_a(\max)$	† 4.5
Maximum Screen Dissipation (watts)	$P_{g2}(\max)$	1.5
Maximum Potential Heater/Cathode (volts DC)	$V_{h-k}(\max)$	150

* Taken at $V_a = V_{g2} = 200v$; $V_{g1} = -4v$; $V_{g3} = 0v$.

$$\frac{\delta V_{g2}}{\delta V_{g1}} \quad \text{with } I_a \text{ constant}$$

† Low grid resistance should be employed, particularly when running at maximum dissipation.

INTER-ELECTRODE CAPACITANCES

Anode/Earth (μF)	C_{out}	5.7
Anode/Control Grid (μF)	C_{a-g1}	< 0.0005
Control Grid/Earth (μF)	C_{in}	10.5

"Earth" denotes the remaining earthy potential electrodes, heater and metallising joined to cathode.

DIMENSIONS

Maximum Overall Length (mm)	96
Maximum Diameter (mm)	32
Maximum Seated Height (mm)	83.5
Approximate Nett Weight (ozs)	1½
Approximate Packed Weight (ozs)	1½

MOUNTING POSITION - Unrestricted

Indicates a change ←

November 1956

VALVE & CRT DIVISION

Issue 2/6

THE EDISON SWAN ELECTRIC COMPANY LTD.

6F32

MAZDA

6F32


SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

REPLACEMENT TYPE

TYPICAL OPERATION

Anode Voltage (volts)	V_a	200	200
Screen Voltage (volts)	V_{g2}	200	200
Control Grid Bias Voltage (volts)	V_{g1}	-4.5	-4.5
Suppressor Grid Bias Voltage (volts)	V_{g3}	0	-3.3
Anode Current (mA)	I_a	5.1	2.5
Screen Current (mA)	I_{g2}	3.45	5.5
Mutual Conductance (mA/V)	g_m	3.0	1.4
Approximate Suppressor Grid Bias (volts) for 50 μ A/V with $V_{g1} = -4.5$ v.		-8.0	-8.0

BULB MetallisedBASE B.O.7

Viewed from free ends of pins

CAP B.V.A. StandardCONNECTIONS

Pin 1	Heater	h
Pin 2	Cathode	k
Pin 3	Anode	a
Pin 4	Screen Grid	g_2
Pin 5	Suppressor Grid	g_3
Pin 6	Metallising	M
Pin 7	Omitted	-
Pin 8	Heater	h
Top Cap	Control Grid	g_1

Indicates a change ←

November 1956

VALVE & CRT DIVISION

Issue 2/6

THE EDISON SWAN ELECTRIC COMPANY LTD.

EDISWAN

MAZDA

6F32

SCREENED R.F. PENTODE

Indirectly heated—for parallel operation


Replacement Type

6F32

AVERAGE CHARACTERISTIC CURVES

Curves taken at $V_0 = V_{g2} = 200V$

Where the curve is broken a dissipation limit is exceeded.

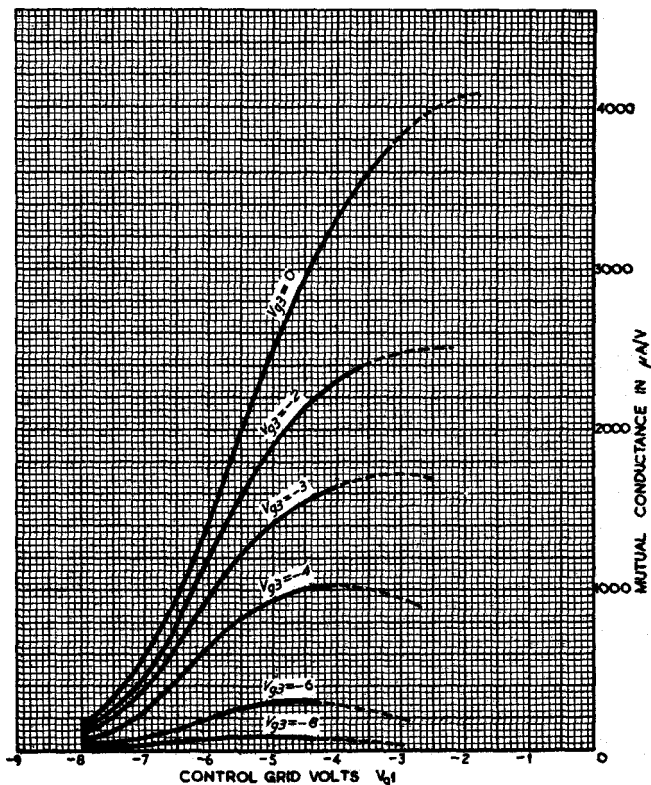

Indicates a change ←

November 1956

VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED

6F32

EDISWAN

MAZDA

6F32

SCREENED R.F. PENTODE

Indirectly heated—for parallel operation


Replacement Type



AVERAGE CHARACTERISTIC CURVES

Curves taken at $V_b = V_{b2} = 200V$.

Where the curve is broken a dissipation limit is exceeded.

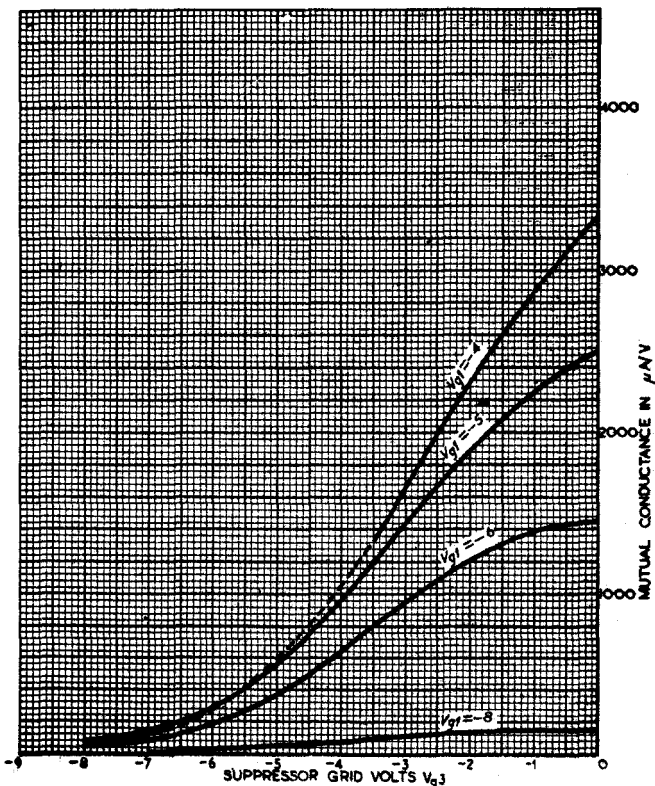

Indicates a change ←

November 1956

VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED

EDISWAN



MAZDA

6F32

6F32

SCREENED R.F. PENTODE Indirectly heated—for parallel operation Replacement Type AVERAGE CHARACTERISTIC CURVES

Curves taken at $V_0 = V_{g2} = 200V$

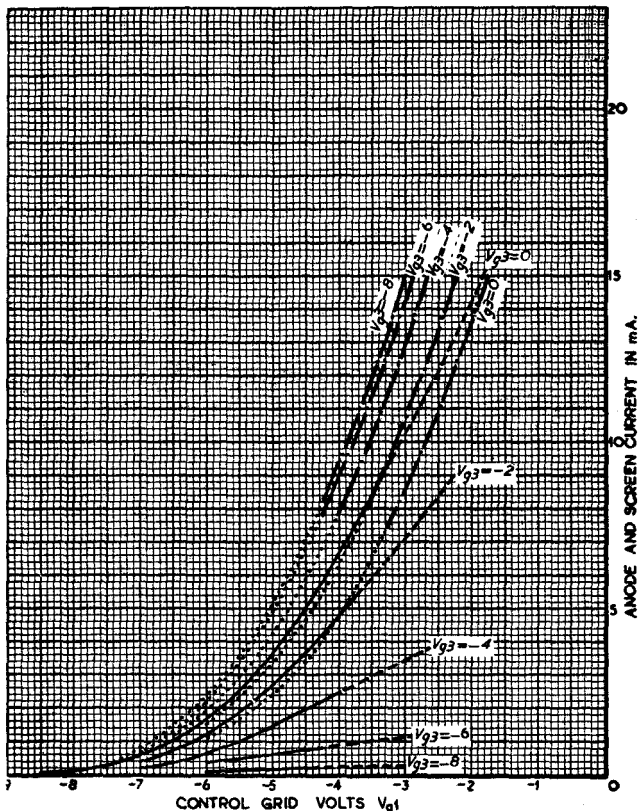

Indicates a change ←

November 1956

VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED

6F32

EDISWAN

MAZDA



6F32

SCREENED R.F. PENTODE

Indirectly heated—for parallel operation

Replacement Type

AVERAGE CHARACTERISTIC CURVES

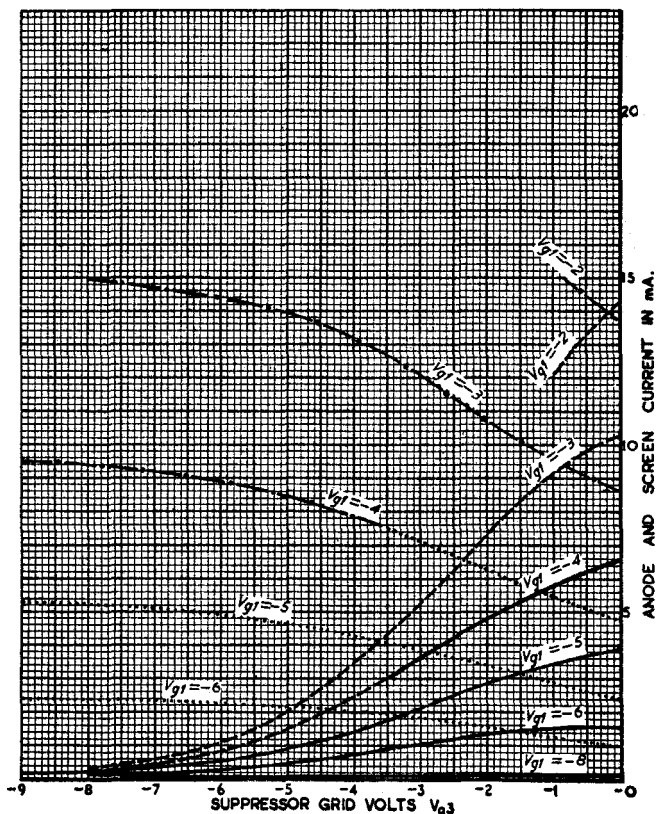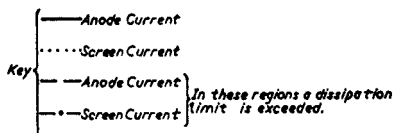Curves taken at $V_{g2}=200V$ 

Indicates a change

November 1956

VALVE & CRT DIVISION

Issue 2/2

SIEMENS EDISON SWAN LIMITED