

6F33

SCREENED R.F. PENTODE
Indirectly heatedGENERAL

The 6.F.33 has a short cut-off Suppressor Grid characteristic which makes it particularly suitable for use in Modulator, Variable Reactance and Timing Circuits. A diode has been tied to the suppressor in order to prevent "blocking" when this grid is driven positive.

RATING

Heater Voltage (volts)	V_h	6.3
Heater Current (amps)	I_h	0.35
Maximum Anode Voltage (volts)	$V_{a(max)}$	250
Maximum Screen Voltage (volts)	$V_{g2(max)}$	250
Mutual Conductance (mA/V)	g_m	* 4.35
Inner μH	$\mu_{g1 g2}$	* 38
Maximum Anode Dissipation (watts)	$P_{a(max)}$	2.5
Maximum Screen Dissipation (watts)	P_{g2}	0.8
Maximum Potential Heater/Cathode (volts DC)	$V_{h-k(max)}$	100

* Taken at $V_a = 200V$; $V_{g2} = 100V$;
 $V_{g1} = -1.5V$; $V_{g3} = 0V$.

μH i.e. $\frac{\delta V_{g2}}{\delta V_{g1}}$ with I_a constant.

INTER-ELECTRODE CAPACITANCES

		pF	pF
Anode/Earth	(μF)	C_{out}	4.5
Anode/Control Grid	(μF)	C_{a-g1}	0.01
Control Grid/Earth	(μF)	C_{in}	7.3
Suppressor Grid/Earth	(μF)	C_{g3-E}	10.0
			11.1

pF Measured with Benjamin cylindrical screen type 75/832, but holder capacity balanced out.

pF Including capacity of Benjamin B7G holder type 75/833 and screen type 75/832.

DIMENSIONS

Maximum Overall Length	(mm)	54
Maximum Diameter	(mm)	19
Maximum Seated Height	(mm)	48.6
Approximate Nett Weight	(ozs)	$\frac{1}{2}$
Approximate Packed Weight	(ozs)	$\frac{1}{2}$

MOUNTING POSITION - Unrestricted.

6F33
SCREENED R.F. PENTODE
Indirectly heated

BULB Clear

BASE B.7.C



Viewed from free end of pins

CONNECTIONS

Pin 1	Control Grid	g1
Pin 2	Cathode	k
Pin 3	Heater	h
Pin 4	Heater	h
Pin 5	Anode	a
Pin 6	Suppressor Grid	g3
Pin 7	Screen Grid	g2

6F33


SCREENED R.F. PENTODE

Indirectly heated

CHARACTERISTIC CURVES OF AVERAGE

Curves taken at $V_b = 200V$.

Key { — Anode Current
 Screen Current

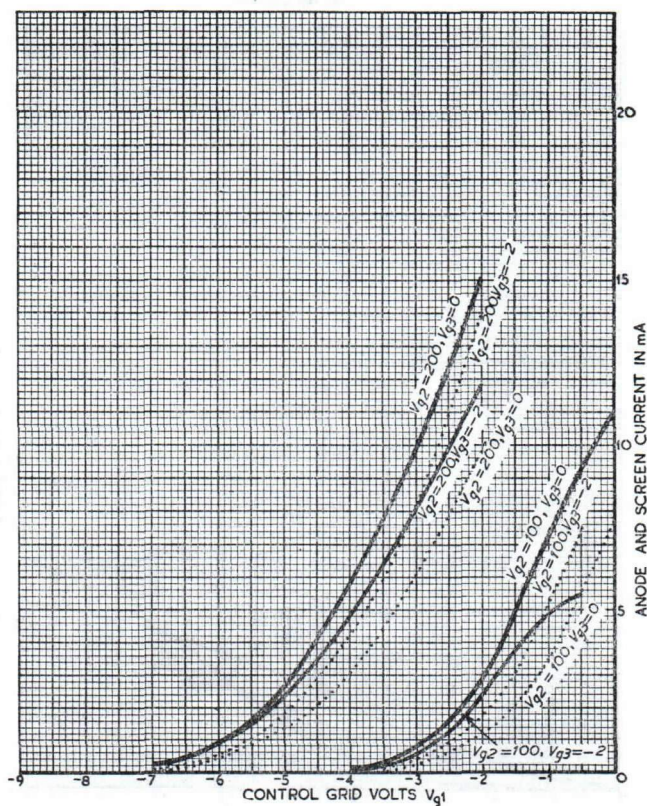


6F33
SCREENED R.F. PENTODE
 Indirectly heated

CHARACTERISTIC CURVES OF AVERAGE

Curves taken at $V_g = 200V$.

Key { — Anode Current
 Screen Current

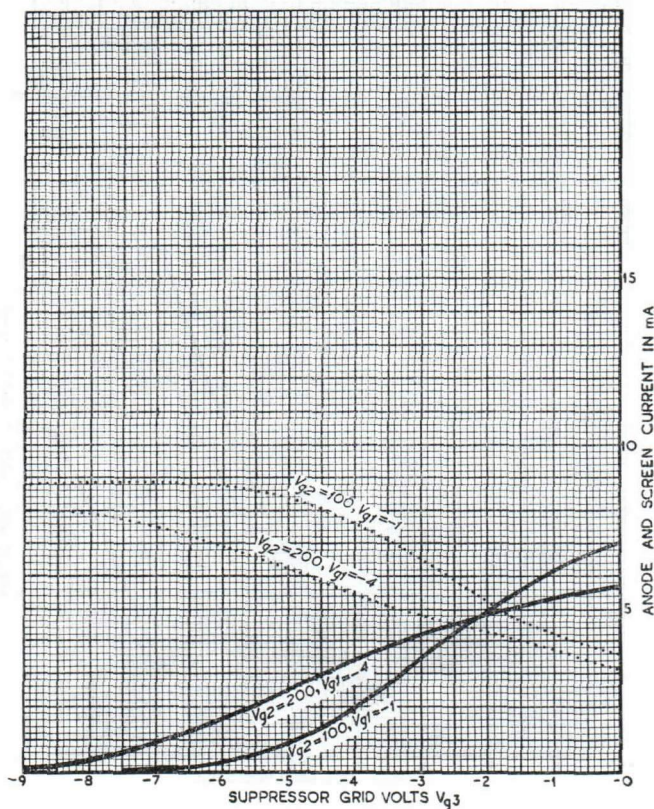


6F33

SCREENED R.F. PENTODE

Indirectly heated

CHARACTERISTIC CURVES OF AVERAGE

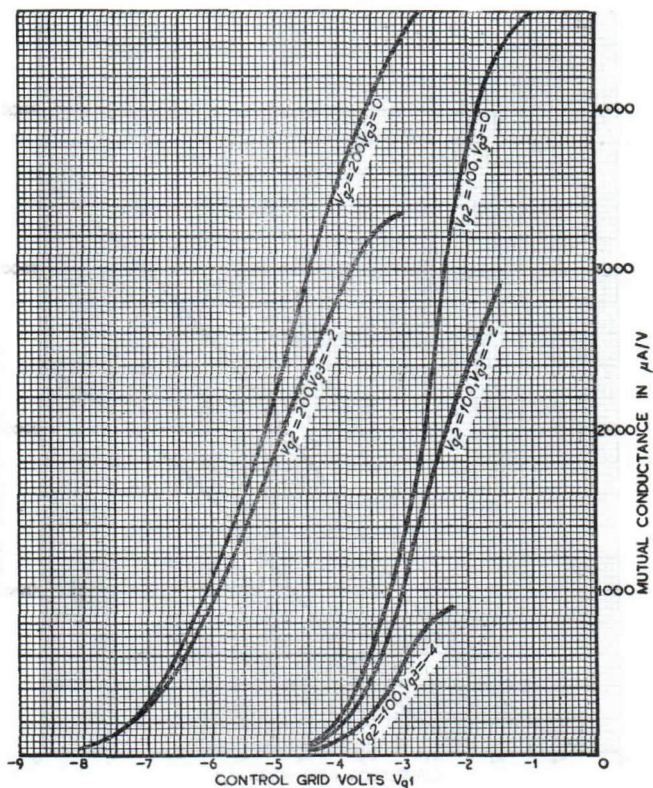Curves taken at $V_g = 200V$.

6F33

SCREENED R.F. PENTODE
Indirectly heated

CHARACTERISTIC CURVES OF AVERAGE

Curves taken at $V_b = 200V$ 