

Sharp-Cutoff Pentode

With Two Independent Control Grids

7-PIN MINIATURE TYPE

With Heater Having Controlled Warm-Up Time

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	6.3	volts
Current	$0.45 \pm 6\%$	amp
Warm-up time (Average)	11	sec

Direct Interelectrode Capacitances
(Approx.):^a

Grid No.1 to plate	0.026	μmf
Grid No.1 to cathode & internal shield, grid No.3, grid No.2, and heater	8	μmf
Grid No.3 to plate	1.6	μmf
Grid No.1 to grid No.3	0.12	μmf
Grid No.3 to cathode & internal shield, plate, grid No.2, grid No.1, and heater	6.5	μmf

Characteristics, Class A₁ Amplifier:

Plate Supply Voltage	150	volts
Grid-No.3 Supply Voltage	0	volts
Grid-No.2 Supply Voltage	100	volts
Grid-No.1 Supply Voltage	0	volts
Cathode Resistor	180	ohms
Plate Resistance (Approx.)	0.14	megohm
Transconductance, Grid No.1 to Plate	3700	μmhos
Transconductance, Grid No.3 to Plate	750	μmhos
Plate Current	3.7	ma
Grid-No.2 Current	3	ma
Grid-No.1 Supply Voltage (Approx.) for plate $\mu\text{a} = 20$	-4.5	volts
Grid-No.3 Supply Voltage (Approx.) for plate $\mu\text{a} = 20$	-7	volts

Mechanical:

Operating Position	Any
Maximum Overall Length	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip)	1-1/2" $\pm$ 3/32"
Diameter	0.650" to 0.750"
Dimensional Outline	See General Section
Bulb	T5-1/2
Base	Small-Button Miniature 7-Pin (JEDEC No.E7-1)



6GY6

Basing Designation for BOTTOM VIEW. 7EN

Pin 1-Grid No.1
Pin 2-Cathode,
Internal
Shield
Pin 3-Heater



Pin 4-Heater
Pin 5-Plate
Pin 6-Grid No.2
Pin 7-Grid No.3

GATED AGC AMPLIFIER & NOISE INVERTER

For operation in a 525-line, 30-frame system^b

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE.	300	max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE ^c	600	max.	volts
GRID-No.3 (CONTROL-GRID) VOLTAGE:			
Negative-bias value.	100	max.	volts
Positive-bias value.	0	max.	volts
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE . .	300	max.	volts
GRID-No.2 VOLTAGE.	See <i>Grid-No.2 Input Rating Chart</i> 		

Maximum Circuit Values:

Grid-No.3-Circuit Resistance	0.68	max.	megohm
Grid-No.1-Circuit Resistance:			
For fixed-bias operation	0.22	max.	megohm
For cathode-bias operation	0.47	max.	megohm

^a Without external shield.

^b As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.


^c This rating is applicable when the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^d The dc component must not exceed 100 volts.



AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS
 GRID-No. 3 VOLTS=0
 GRID-No. 2 VOLTS=100

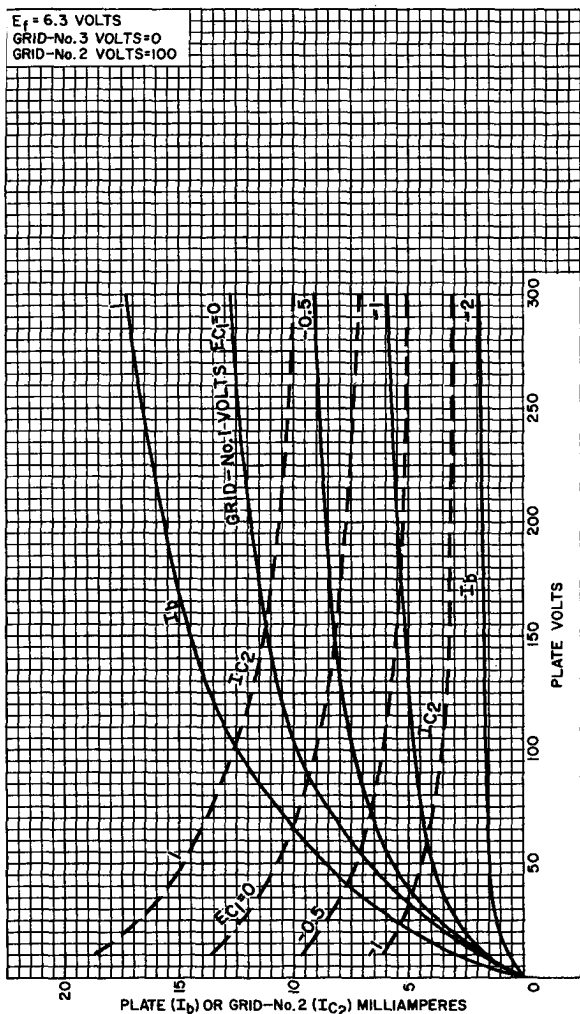


92CM-11002



6GY6


AVERAGE CHARACTERISTICS

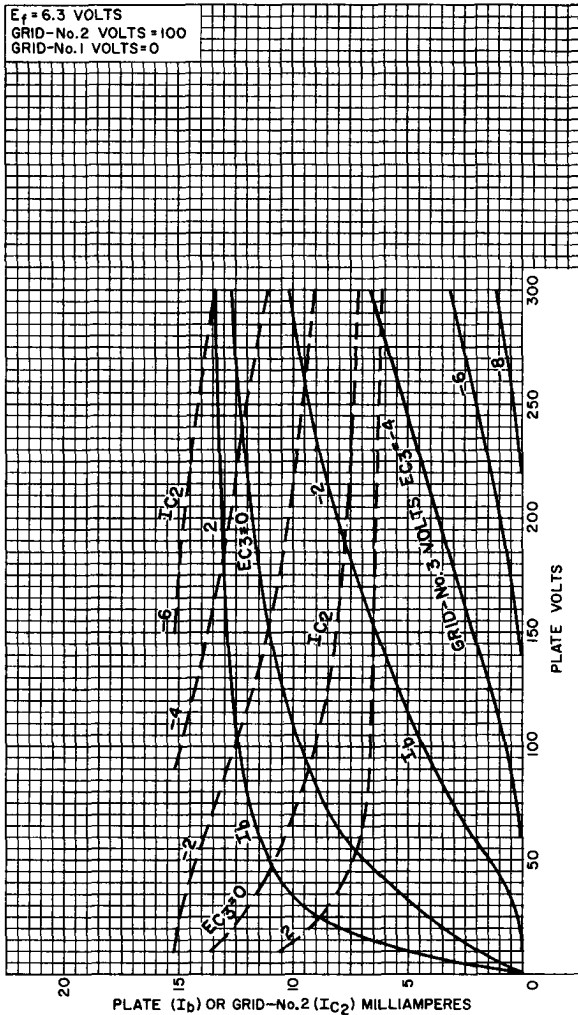

92CM-11003



AVERAGE CHARACTERISTICS

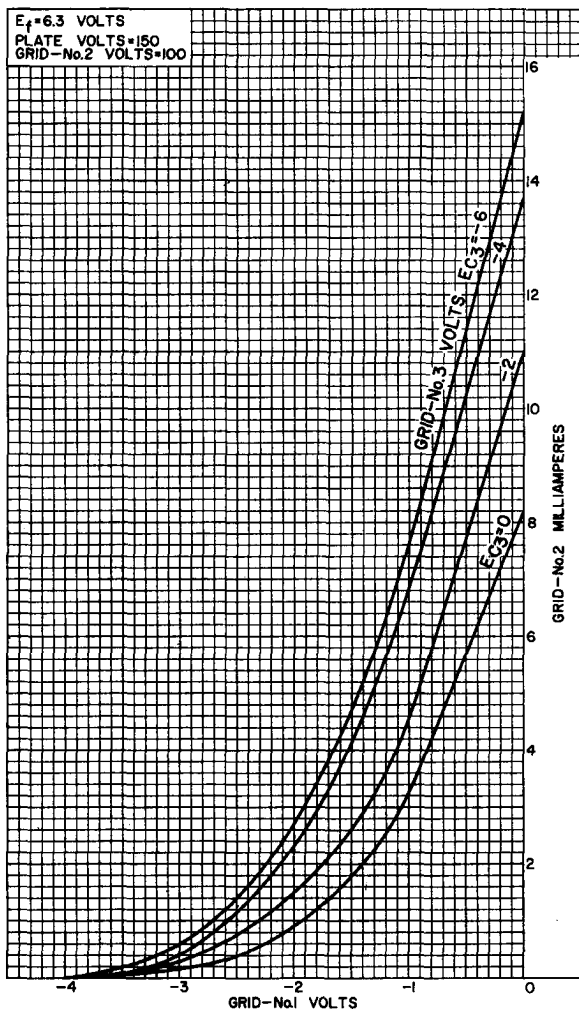


92CM-11007



6GY6

AVERAGE CHARACTERISTICS

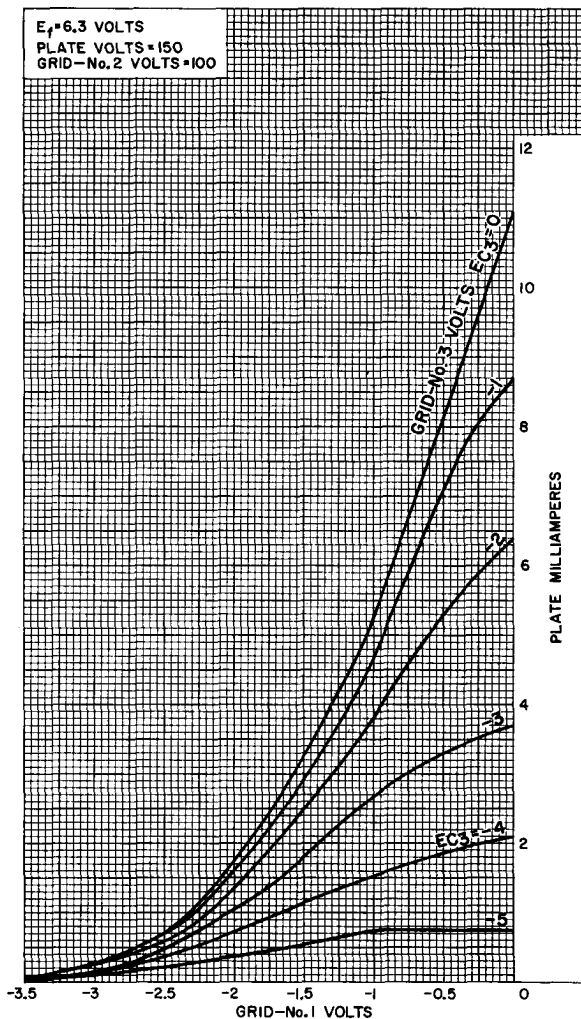

92CM-11005

