

Medium-Mu Triode— Sharp-Cutoff Pentode

9-PIN MINIATURE TYPE

For VHF Oscillator-Mixer Service in TV Receivers

Electrical:

Heater Characteristics and Ratings:

Voltage (AC or DC)	6.3 ± 0.6 ^a	volts
Current at heater volts = 6.3. . .	0.450 ^b	amp
Warm-up time (Average)	11	sec

Peak heater-cathode voltage:

Heater negative with respect to cathode	200 max.	volts
Heater positive with respect to cathode	200 ^c max.	volts

Direct Interelectrode Capacitances: ^d

Triode Unit:

G _T to P _T	1.9	pf
Input: G _T to (K+G _{3P} +I _S ,H). . .	3.0	pf
Output: P _T to (K+G _{3P} +I _S ,H). . .	1.9	pf

Pentode Unit:

G _{1P} to P _P	0.010 max.	pf
Input: G _{1P} to (K+G _{3P} +I _S ,G _{2P} ,H). .	5.0	pf
Output: G _{1P} to (K+G _{3P} +I _S ,G _{2P} ,H). .	3.4	pf
H to K ^e	3.8	pf

Characteristics, Class A₁ Amplifier:

	Triode Unit	Pentode Unit	
Plate Supply Voltage	150	125	volts
Grid-No.2 Supply Voltage	—	125	volts
Grid-No.1 Supply Voltage	0	-1	volts
Cathode Resistor	56	—	ohms
Amplification Factor	40	—	
Plate Resistance (Approx.)	5000	200000	ohms
Transconductance	8500	6400	μmhos
Plate Current.	18	12	ma
Grid-No.2 Current.	—	4	ma
Grid-No.1 Voltage (Approx.)			
for plate μ _a = 10.	-12	-9	volts

Mechanical:

Operating Position	Any
Type of Cathode.	Coated Unipotential
Maximum Overall Length	2-3/16"
Maximum Seated Length.	1-15/16"
Length, Base Seat to Bulb Top (Excluding Tip). .	1-9/16" ± 3/32"
Diameter	0.750" to 0.875"
Dimensional Outline.	See General Section
Bulb	T6-1/2



6HB7

Base. Small-Button Novol 9-Pin (JEDEC No.E9-1)
 Basing Designation for BOTTOM VIEW. 9QA

Pin 1—Cathode, Pentode
 Grid No.3,
 Internal Shield

Pin 2—Pentode Grid No.1

Pin 3—Same as Pin 1

Pin 4—Heater


Pin 5—Heater

Pin 6—Pentode Plate

Pin 7—Pentode Grid No.2

Pin 8—Triode Plate

Pin 9—Triode Grid



AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

	Triode Unit	Pentode Unit	
Plate Voltage	330 max.	330 max.	volts
Grid-No.2 (Screen-Grid) Supply Voltage.	—	330 max.	volts
Grid-No.2 Voltage	See Grid-No.2 Input Rating Chart at front of Receiving Tube Section		
Grid-No.1 (Control-Grid) Voltage:			
Positive-bias value	0 max.	0 max.	volts
Grid-No.2 Input:			
For grid-No.2 voltages up to 165 volts	—	0.55 max.	watt
For grid-No.2 voltages between 165 and 330 volts	See Grid-No.2 Input Rating Chart at front of Receiving Tube Section		
Plate Dissipation	2.5 max.	3.1 max.	watts

Maximum Circuit Values:

Grid-No.1 Circuit Resistance:

For fixed-bias operation. . .	0.5 max.	0.25 max.	megohm
For cathode-bias operation. .	1.0 max.	0.5 max.	megohm

a For parallel heater operation.


b For series heater operation current must be limited to 0.450 ± 0.030 amperes.

c The dc component must not exceed 100 volts.

d With external shield JEDEC No.315 connected to cathode except as noted.

e With external shield JEDEC No.315 connected to ground.

AVERAGE PLATE CHARACTERISTICS Triode Unit

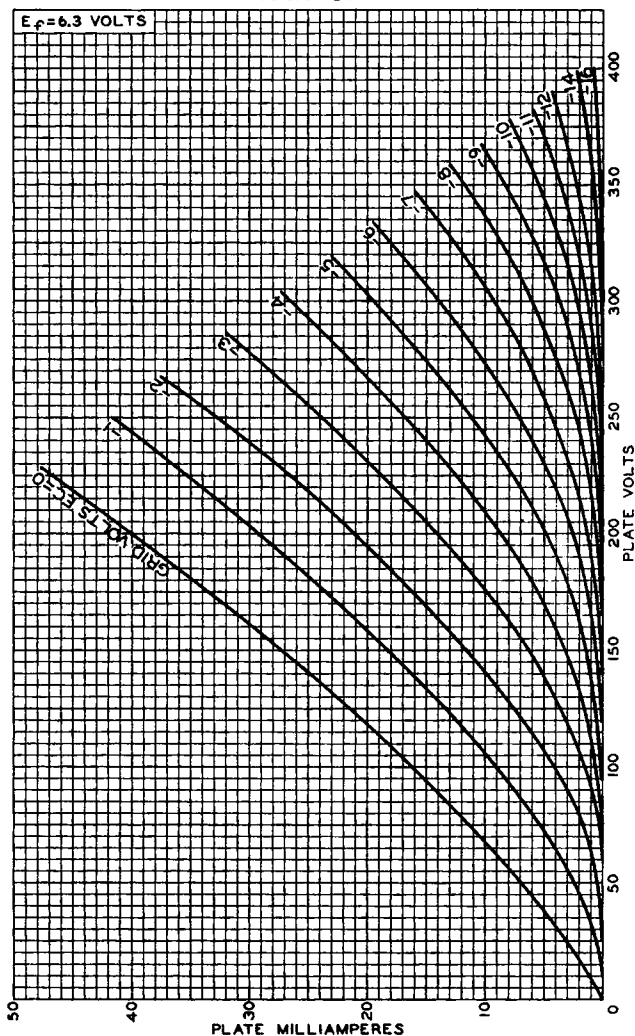


92CM-9866



6HB7


AVERAGE CHARACTERISTICS Triode Unit

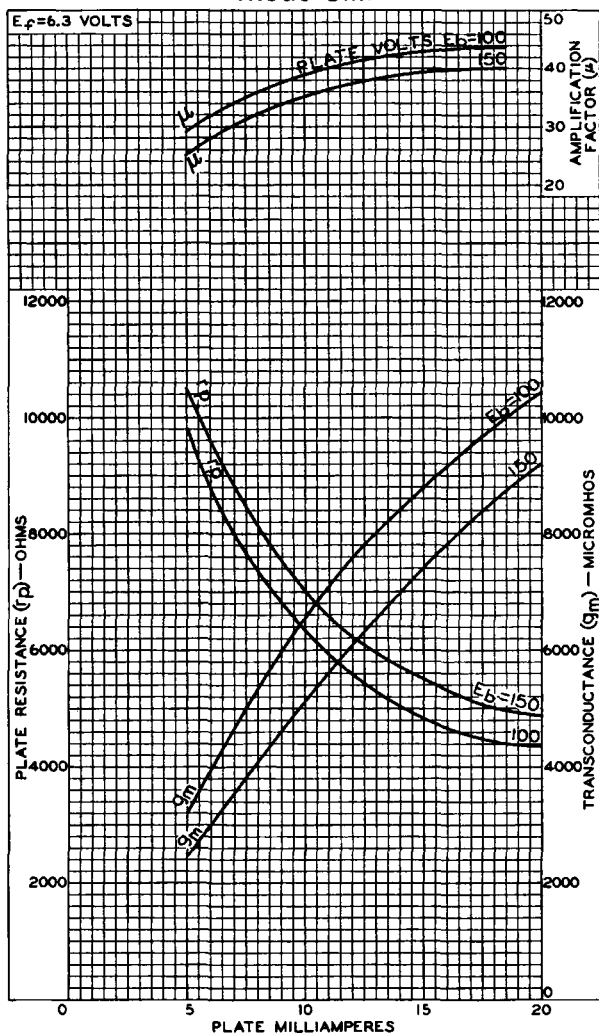

92CM-9882RI

AVERAGE CHARACTERISTICS

Pentode Unit

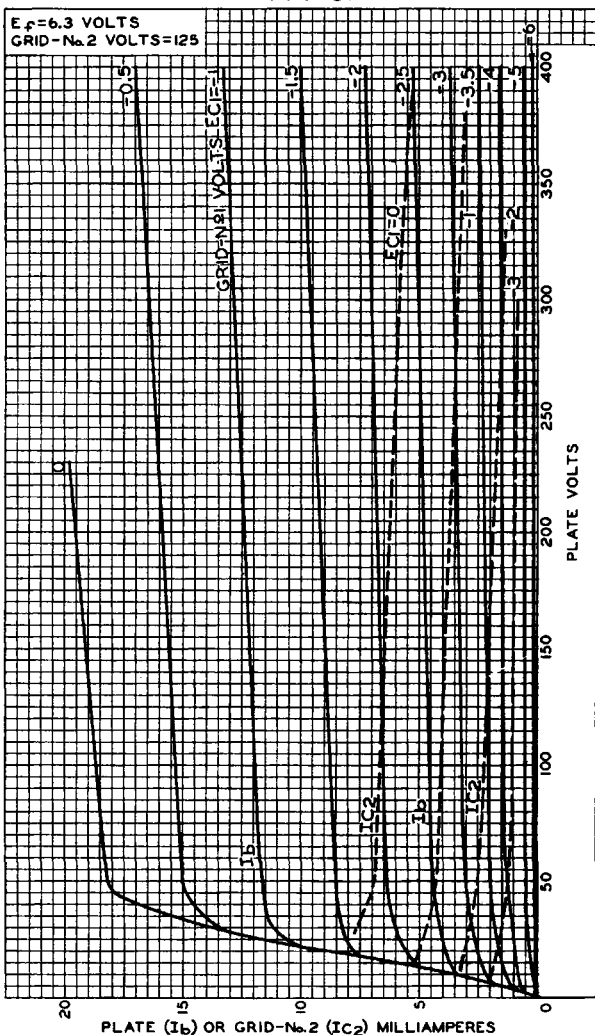

92CM-9867RI




RADIO CORPORATION OF AMERICA
Electronic Components and Devices

Harrison, N. J.

DATA 3
3-64

6HB7

AVERAGE CHARACTERISTICS Pentode Unit

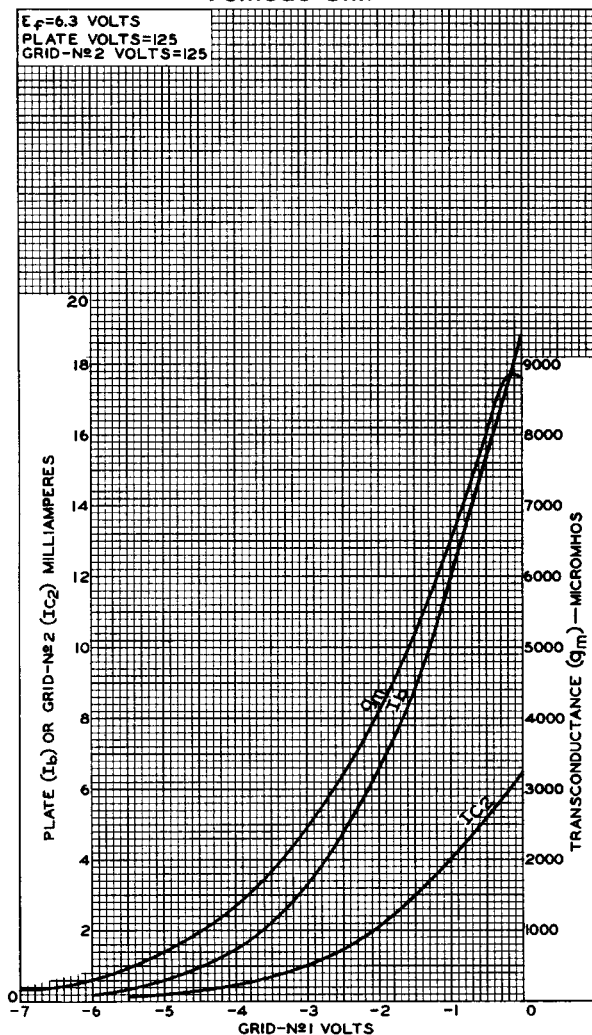

92CM-9868R1

