

6HM5 TRIODE

FOR VHF RF AMPLIFIER APPLICATIONS

DESCRIPTION AND RATING

The 6HM5 is a miniature triode designed particularly for service in VHF television tuners as a grounded-cathode rf amplifier.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential		
Heater Characteristics and Ratings		
Heater Voltage, AC or DC*	6.3±0.6	Volts
Heater Current†	0.185	Amperes
Direct Interelectrode Capacitances‡		
Grid to Plate: (g to p), maximum	0.34	pf
Input: g to (h + k + i.s.)	4.5	pf
Output: p to (h + k + i.s.)	3.0	pf
Heater to Cathode: (h to k)	2.5	pf

MECHANICAL


Operating Position - Any		
Envelope - T-5 1/2, Glass		
Base - E7-1, Miniature Button 7-Pin		
Outline Drawing - EIA 5-2		
Maximum Diameter	0.750	Inches
Maximum Over-all Length	2.125	Inches
Maximum Seated Height	1.875	Inches

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES

Plate Voltage	200	Volts
Negative DC Grid Voltage	50	Volts
Plate Dissipation	2.2	Watts
DC Cathode Current	20	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode	100	Volts
Heater Negative with Respect to Cathode	100	Volts
Grid Circuit Resistance		
With Cathode Bias	1.0	Megohms

PHYSICAL DIMENSIONS

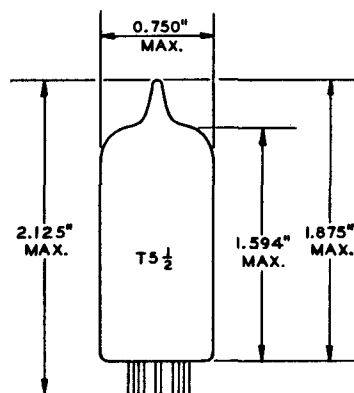


EIA 5-2

TERMINAL CONNECTIONS

- Pin 1 - Grid
- Pin 2 - Cathode
- Pin 3 - Heater
- Pin 4 - Heater
- Pin 5 - Plate
- Pin 6 - Internal Shield
- Pin 7 - Cathode

BASING DIAGRAM



EIA 7GM

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

MAXIMUM RATINGS (Cont'd)

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

CHARACTERISTICS AND TYPICAL OPERATION


AVERAGE CHARACTERISTICS

Plate Voltage.	120	135	Volts
Grid Voltage	0	-1.0	Volts
Grid-Circuit Resistance	0.1	0	Megohms
Amplification Factor	82	78	
Transconductance.	18000	14500	Micromhos
Plate Current.	15	12.5	Milliamperes
Grid Voltage, approximate Gm = 150 Micromhos	-5.1	-5.7	Volts
Grid Voltage, approximate Gm = 1500 Micromhos.	---	-2.7	Volts
Hot Input Resistance¶.	---	1000	Ohms
Hot Input Capacitance¶.	---	8.5	Picofarads
Noise Figure#.	4.0	4.2	Decibels

NOTES

- * The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.
- ‡ Heater current of a bogey tube at Ef = 6.3 volts.
- § With external shield (EIA 316) connected to cathode.
- ¶ Measured at 200 megacycles with plate at signal ground; Ec1 = -1.5 volts.
- # In a 200 megacycle noise-matched, optimized, neutralized, grounded-cathode triode amplifier stage.


AVERAGE PLATE CHARACTERISTICS

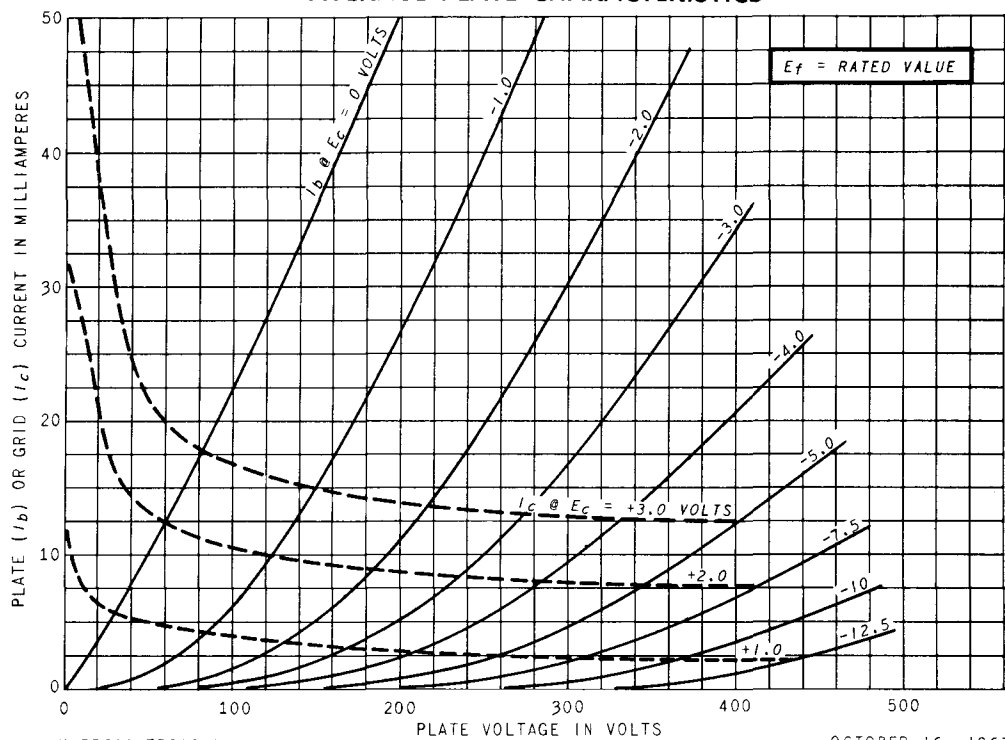

K-55611-TD246-1

OCTOBER 16, 1963

AVERAGE TRANSFER CHARACTERISTICS

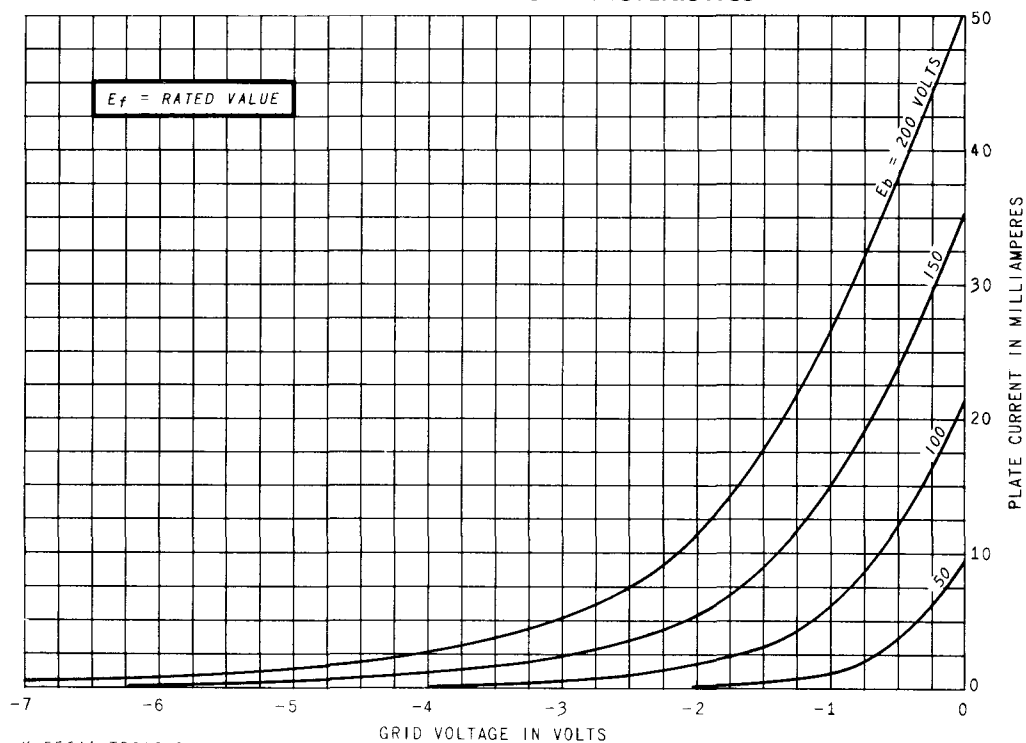

K-55611-TD246-2

OCTOBER 16, 1963

AVERAGE CHARACTERISTICS

