



TECHNICAL DATA

Electronic Tubes

from JEDEC release #3531,
Dec. 18, 1961

6HW8

SHEET-BEAM TUBE

The 6HW8 is a miniature, double-plate, sheet-beam tube which incorporates a pair of balanced deflectors to direct the electron beam to either of the two plates, and a control grid to vary the intensity of the beam.

GENERAL

Electrical

Cathode - Coated Unipotential

Heater Voltage, AC or DC*

6.3±0.6% Volts
0.3 Amperes

Heater Current†

Direct Interelectrode Capacitances, approximate‡

Deflector-Number 1 to All

4.2 pf

Deflector-Number 2 to All

4.2 pf

Grid-Number 1 to All Except Plates

7.5 pf

Plate-Number 1 to All

4.4 pf

Plate-Number 2 to All

4.4 pf

Grid-Number 1 to Deflector-Number 1, maximum

0.05 pf

Grid-Number 1 to Deflector-Number 2, maximum

0.03 pf

Plate-Number 1 to Plate-Number 2

0.12 pf

Deflector-Number 1 to Deflector-Number 2

0.35 pf

Mechanical

Mounting Position - Any

Envelope - T-6 1/2, Glass

Base - E9-1, Small Button 9-Pin

Outline Drawing - EIA 6-3

Maximum Diameter

7/8 Inches

Maximum Over-all Length

2 5/8 Inches

Maximum Seated Height

2 3/8 Inches

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

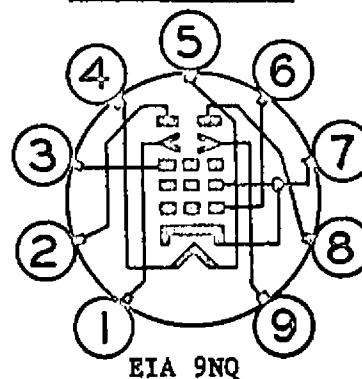
TERMINAL CONNECTIONS

Pin 1 - Deflector Number 2
 Pin 2 - Plate Number 2
 Pin 3 - Accelerator
 Pin 4 - Heater
 Pin 5 - Heater and Internal Shield
 Pin 6 - Grid Number 1 (Control Grid)
 Pin 7 - Cathode and Focus Electrode
 Pin 8 - Plate Number 1
 Pin 9 - Deflector Number 1

MAXIMUM RATINGS

Design-Maximum Values

Plate Voltage, Each Plate	330	Volts
Accelerator Voltage	330	Volts
Peak Positive Deflector Voltage, Each Deflector	165	Volts
Peak Negative Deflector Voltage, Each Deflector	165	Volts
Positive DC Grid-Number 1 Voltage	0	Volts
Plate Dissipation, Each Plate	2.0	Watts
DC Cathode Current	30	Milliamperes
Grid-Number 1 Circuit Resistance		
With Cathode Bias	0.25	Megohms

BASING DIAGRAM

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operation conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

CHARACTERISTICS AND TYPICAL OPERATION

Average Characteristics with Deflectors Grounded

Plate-Number 1 Voltage	250	Volts
Plate-Number 2, Connected to Plate-Number 1		
Accelerator Voltage	250	Volts
Deflector-Number 1 Voltage	0	Volts
Deflector-Number 2 Voltage	0	Volts
Cathode-Bias Resistor	270	Ohms
Total Plate Current	13	Milliamperes

CHARACTERISTICS AND TYPICAL OPERATION (Continued)

Accelerator Current	1.4	Milliamperes
Grid-Number 1 Transconductance	4000	Micromhos
Grid-Number 1 Voltage, approximate Ib (total) = 10 Microamperes	-14	Volts

Average Deflector Characteristics

Plate-Number 1 Voltage	250	Volts
Plate-Number 2 Voltage	250	Volts
Accelerator Voltage	250	Volts
Cathode-Bias Resistor	270	Ohms
Deflector Switching Voltage, maximum#	40	Volts
Deflector-Bias Voltage for Minimum Deflector Switching Voltage#	12	Volts
Voltage Difference between Deflectors For Ib1 = Ib2, approximate	0	Volts
Plate-Number 1 Current, maximum Ed1 = +2 Volts, Ed2 = +32 Volts Ib2 = 18 ma	50	Microamperes
Plate-Number 2 Current, maximum Ed1 = +32 Volts, Ed2 = +2 Volts Ib1 = 18 ma	50	Microamperes
Deflector-Number 1 Current, maximum Ed1 = +2 Volts, Ed2 = +38 Volts Eb = 225 Volts, Eg1 = +3 Volts	55	Microamperes
Deflector-Number 2 Current, maximum Ed1 = +38 Volts, Ed2 = +2 Volts Eb = 225 Volts, Eg1 = +3 Volts	55	Microamperes

* The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.

+ Heater current of a bogey tube at Ef = 6.3 volts.

‡ Without external shield.

Deflector switching voltage is defined as the total voltage change on either deflector with an equal and opposite change on the other deflector required to switch the plate current from one plate to the other.