

Sharp-Cutoff Pentode

With Two Independent Control Grids

7-PIN MINIATURE TYPE

With Heater Having Controlled Warm-Up Time

GENERAL DATA

Electrical:Heater Characteristics and Ratings (*Design-Maximum Values*):

Voltage (AC or DC)	6.3 ^a	6.3 ± 0.6	volts
Current	0.450 ± 0.030	0.450 ^b	amp
Warm-up time (Average)	11	—	sec

Peak heater-cathode voltage:

Heater negative with respect to cathode	200	max.	volts
Heater positive with respect to cathode	200 ^c	max.	volts

Direct Interelectrode Capacitances

(Approx):^d

Grid No.1 to plate	0.023	pf
Grid No.1 to cathode & internal shield, grid No.3, grid No.2 & internal shield, and heater	8.2	pf
Grid No.1 to grid No.3	0.09	pf
Grid No.3 to plate	1.6	pf
Grid No.3 to cathode & internal shield, plate, grid No.2 & internal shield, grid No.1, and heater	7.2	pf

Characteristics, Class A₁ Amplifier:

Plate Supply Voltage	150	volts
Grid-No.3 Supply Voltage	0	volts
Grid-No.2 Supply Voltage	100	volts
Grid-No.1 Supply Voltage	0	volts
Cathode Resistor	180	ohms
Plate Resistance (Approx.)	0.11	megohm
Transconductance, Grid No.1 to Plate	3400	μmhos
Transconductance, Grid No.3 to Plate	600	μmhos
Plate Current	3.2	ma
Grid-No.2 Current	3.2	ma
Grid-No.1 Supply Voltage (Approx.) for plate $\mu_a = 20$	-4.5	volts
Grid-No.3 Supply Voltage (Approx.) for plate $\mu_a = 20$	-7	volts

Mechanical:


Operating Position	Any
Type of Cathode	Coated Unipotential
Maximum Overall Length	2-1/8"
Maximum Seated Length	1-7/8"
Length, Base Seat to Bulb Top (Excluding tip)	1-1/2" ± 3/32"
Diameter	0.650" to 0.750"



6HZ6

Bulb. T5-1/2
 Base. Small-Button Miniature 7-Pin (JEDEC No.E7-1)
 Basing Designation For BOTTOM VIEW. 7EN

Pin 1-Grid No.1
 Pin 2-Cathode,
 Internal
 Shield
 Pin 3-Heater



Pin 4-Heater
 Pin 5-Plate
 Pin 6-Grid No.2,
 Internal
 Shield
 Pin 7-Grid No.3

FM SOUND-DETECTOR SERVICE

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	300 max.	volts
GRID-No.3 (CONTROL-GRID) VOLTAGE:		
Negative value (DC and peak).	100 max.	volts
Positive value (DC and peak).	25 max.	volts
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE.	300 max.	volts
GRID-No.2 VOLTAGE	See <i>Grid-No.2 Input Rating Chart</i> at front of Receiving Tube Section	
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Negative-bias value	50 max.	volts
Positive-bias value	0 max.	volts
GRID-No.3 INPUT	0.1 max.	watt
GRID-No.2 INPUT:		
For grid-No.2 voltages		
up to 150 volts	1 max.	watt
For grid-No.2 voltages between		
150 volts and 300 volts	See <i>Grid-No.2 Input Rating Chart</i> at front of Receiving Tube Section	
PLATE DISSIPATION	1.7 max.	watts


Maximum Circuit Values:

Grid-No.3-Circuit Resistance.	0.68 max.	megohm
Grid-No.1-Circuit Resistance:		
For fixed-bias operation.	0.22 max.	megohm
For cathode-bias operation.	0.47 max.	megohm

- ^a At heater amperes = 0.450.
^b At heater volts = 6.3.
^c The dc component must not exceed 100 volts.
^d Without external shield.

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS
 PLATE VOLTS = 150
 GRID-No. 2 VOLTS = 100

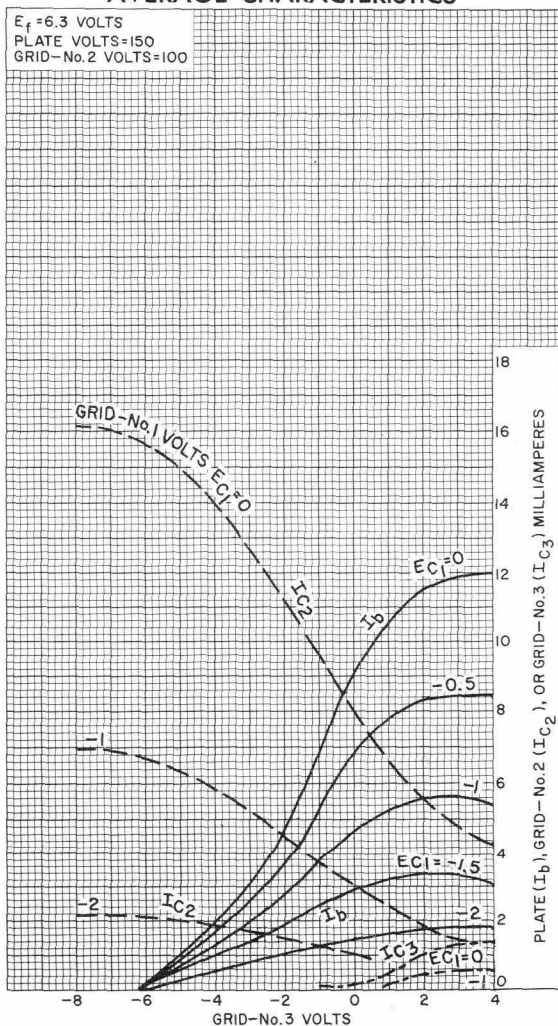


92CM-11789



6HZ6


AVERAGE GRID-No.1 CHARACTERISTIC

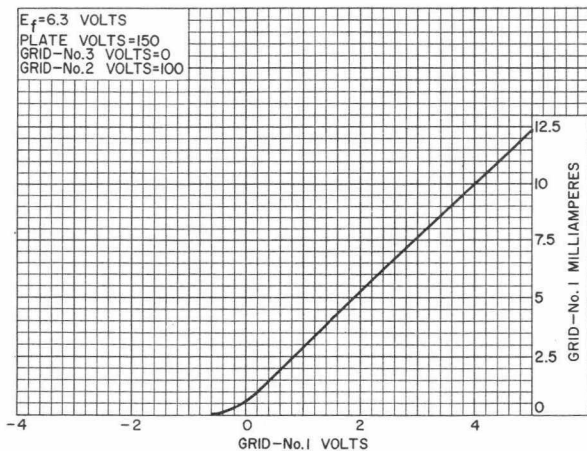

92CS-11004



AVERAGE CHARACTERISTICS

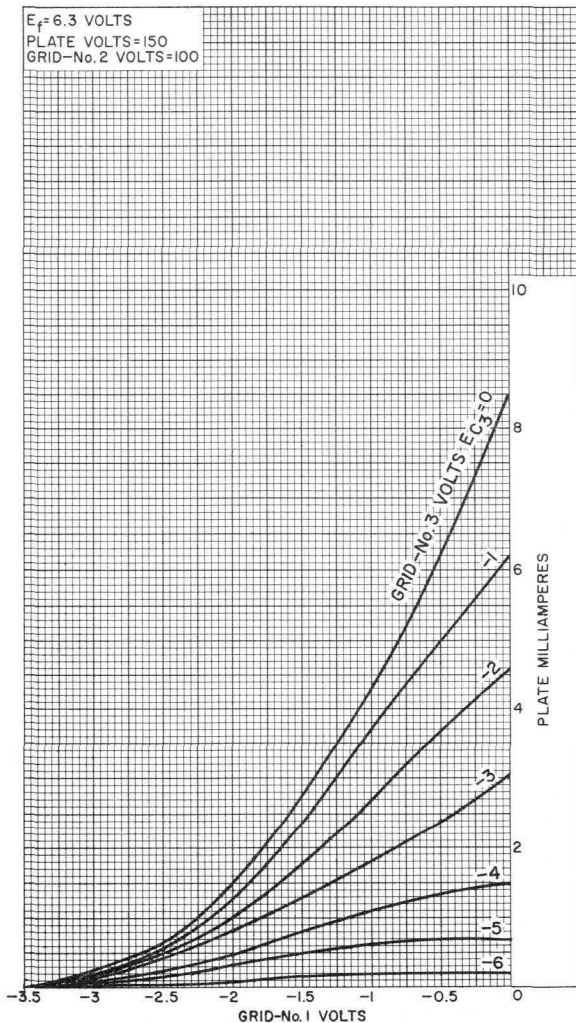


92CM-11788



6HZ6


AVERAGE CHARACTERISTICS

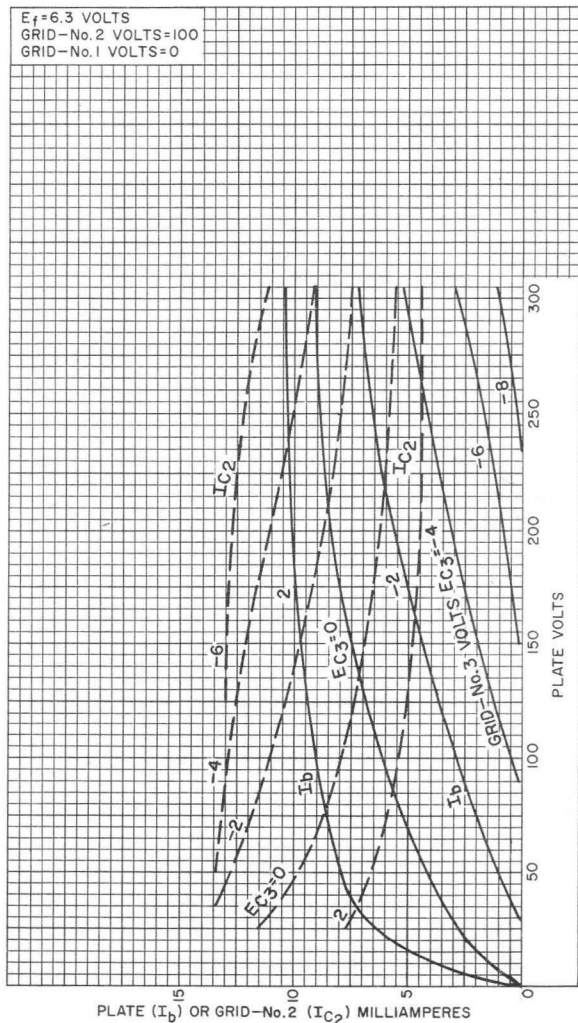

92CM-11793



AVERAGE CHARACTERISTICS

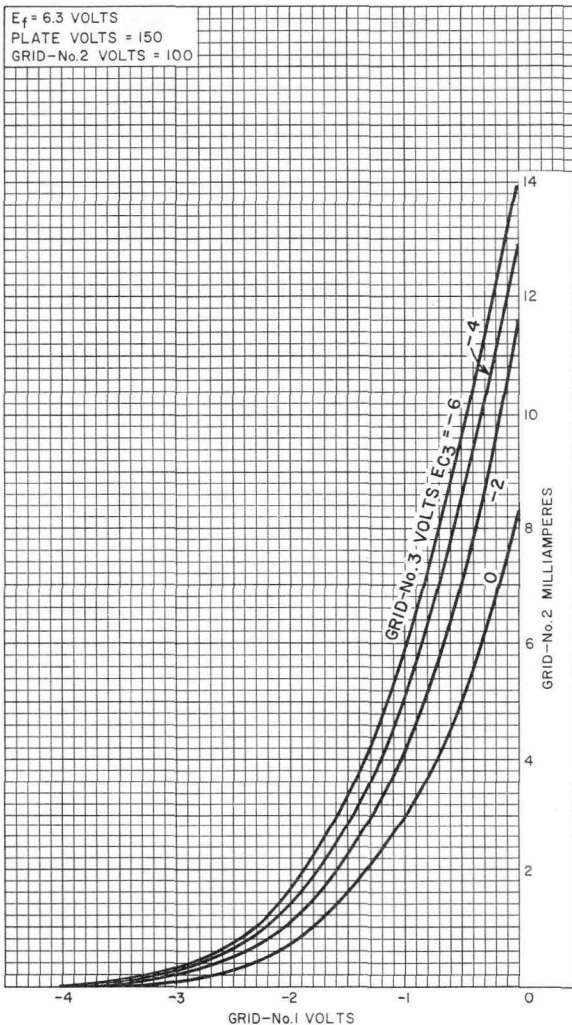

92CM-11791




6HZ6

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS

GRID-No.3 VOLTS=0

GRID-No.2 VOLTS=100

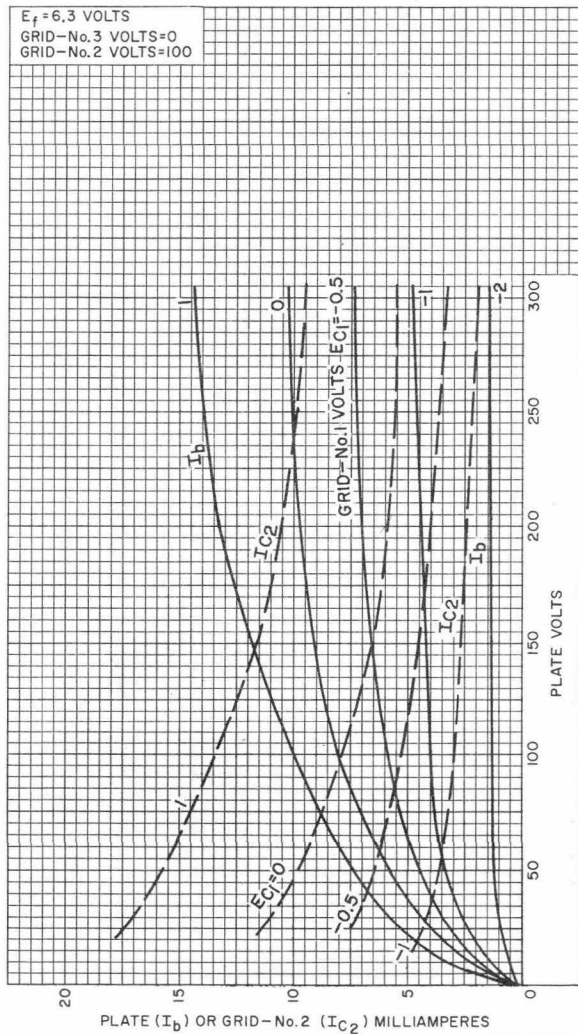

92CM-11792

