

TECHNICAL DATA

6K4

Sylvania

TYPE 6K4

GENERAL PURPOSE TRIODE

RATINGS

Heater Voltage (AC or DC) $\pm 10\%$	6.3	Volts
Maximum Plate Voltage	250	Volts
Maximum Heater to Cathode Voltage	90	Volts
Maximum Plate Dissipation (Open Air)	3.0	Watts
Maximum Cathode Current	20.0	Ma.

Direct Interelectrode Capacitances:

	Shielded*	Unshielded
Grid to Plate	2.4	2.4 uuf.
Input	2.4	2.4 μ uf.
Output	3.8	0.8 μ uf.

*With a .405" diameter shield connected to cathode.

TYPICAL OPERATING CONDITIONS

Heater Voltage	6.3	Volts
Heater Current	150	Ma.
Plate Voltage	200	Volts
Grid Voltage*	Obtained from Self Bias Resistor of	
	680	Ohms
Plate Current	11.5	Ma.
Transconductance	3450	μ mhos
Amplification Factor	16	
Plate Resistance	4650	Ohms
Grid Voltage for Plate Current Cut-Off to 10 μ a.	-30	Volts

*Provides an operating bias of approximately 8.0 volts
Maximum grid circuit resistance should not exceed 1/2 megohm. Fixed bias operation is not recommended.

CIRCUIT APPLICATION

Sylvania Type 6K4 is designed for use in high frequency applications requiring a very small, light-weight tube, highly resistant to shock and vibration.

At frequencies of around 500 Mc., an output of approximately 3/4 Watt may be obtained when used in a suitable circuit.

from RMA release # 455D
Dec. 15, 1947

PHYSICAL SPECIFICATIONS


Style: Sub-Miniature

Bulb: T-3

Base: Flexible Leads

Dimensions: As per outline

Mounting Position: Any

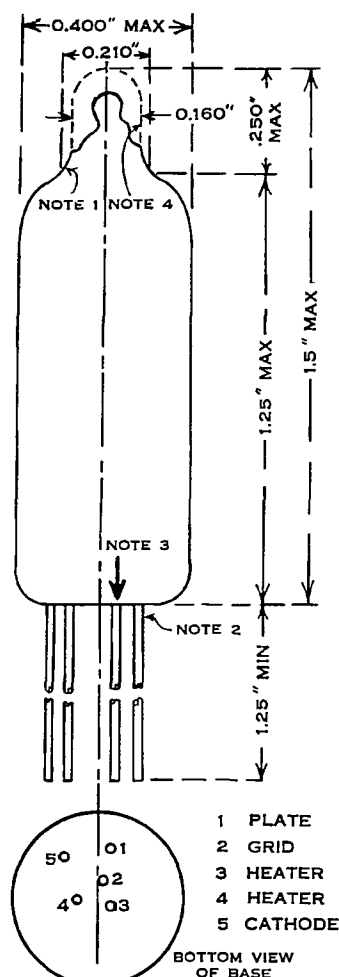Lead Connections: As per
outline

NOTE

- 1 REFERENCE DIAMETER FROM WHICH TIP & BULB LENGTHS ARE DETERMINED
- 2 LEADS SHOULD NOT BE SOLDERED CLOSER THAN 1/4 FROM BASE
- 3 ARROW INDICATES POSITION OF PLATE LEAD
- 4 ALL TIPS LIE WITHIN DOTTED LINES

OCTOBER 27, 1947

COMMERCIAL ENGINEERING DEPARTMENT
Sylvania Electric Products Inc., Emporium, Pennsylvania
PRINTED IN U.S.A.

PLATE OR GRID CURRENT IN MILLIAMPERES

SYLVANIA TYPE 6K4

AVERAGE PLATE CHARACTERISTICS

CONTROL GRID CURRENT - - - -

$E_F = 6.3$ VOLTS

CONTROL GRID VOLTS = - .6

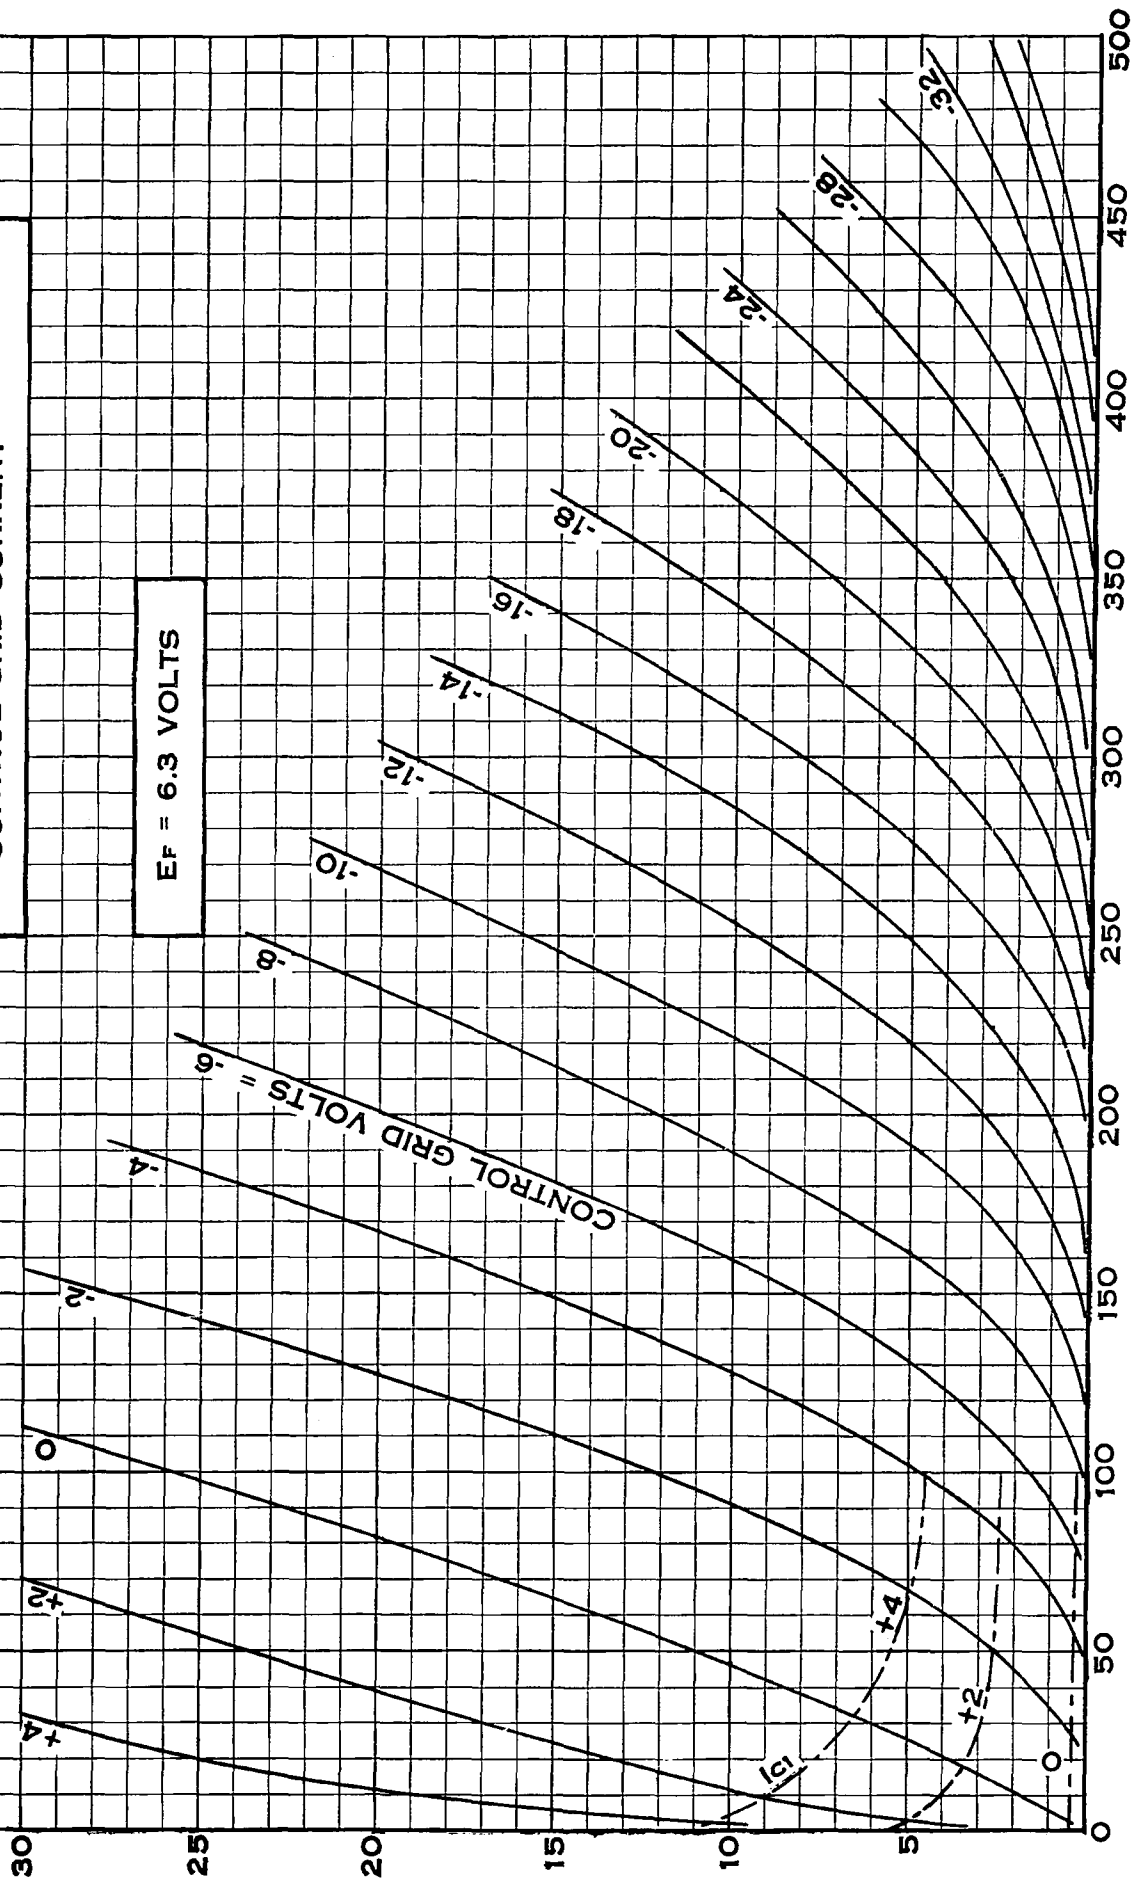


PLATE VOLTS