



6K6-GT

6K6-GT

POWER PENTODE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.4 amp

Direct Interelectrode Capacitances (Approx.):^oGrid No.1 to plate. 0.5 μ fGrid No.1 to cathode & grid No.3,
grid No.2, and heater 5.5 μ fPlate to cathode & grid No.3,
grid No.2, and heater 6 μ f

Mechanical:

Mounting Position Any

Maximum Overall Length 3-5/16"

Maximum Seated Length 2-3/4"

Maximum Diameter 1-9/32"

Dimensional Outline See General Section

Bulb T-9

Base Intermediate-Shell Octal 7-Pin (JETEC No.B7-7),
Short Intermediate-Shell Octal 7-Pin
with External Barriers (JETEC No.B7-59),
Intermediate-Shell Octal 6-Pin (JETEC No.B6-81),
or Short Intermediate-Shell Octal 6-Pin
with External Barriers (JETEC No.B6-84)


Basing Designation for BOTTOM VIEW 7S

Pin 1 $\blacklozenge$ - No Con-
nection

Pin 2 - Heater

Pin 3 - Plate

Pin 4 - Grid No.2



Pin 5 - Grid No.1

Pin 7 - Heater

Pin 8 - Cathode,
Grid No.3AF POWER AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE 315 max. volts

GRID-No.2 (SCREEN-GRID) VOLTAGE 285 max. volts

GRID-No.1 (CONTROL-GRID) VOLTAGE:

Positive bias value 0 max. volts

GRID-No.2 INPUT 2.8 max. watts

PLATE DISSIPATION 8.5 max. watts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode 200 max. volts

Heater positive with respect to cathode 200[▲] max. volts^o Without external shield. $\blacklozenge$ Pin 1 as well as pin 6 is omitted on the 6-Pin bases.[▲] : See next page.

← Indicates a change.

6K6-GT



6K6-GT

POWER PENTODE

Typical Operation and Characteristics:

Plate Voltage	100	250	315	volts
Grid-No.2 Voltage	100	250	250	volts
Grid-No.1 Voltage	-7	-18	-21	volts
Peak AF Grid-No.1 Voltage . .	7	18	21	volts
Zero-Signal Plate Current . .	9	32	25.5	ma
Max.-Signal Plate Current . .	9.5	33	28	ma
Zero-Signal Grid-No.2 Current	1.6	5.5	4	ma
Max.-Signal Grid-No.2 Current	3	10	9	ma
Plate Resistance (Approx.) . .	104000	90000	110000	ohms
Transconductance	1500	2300	2100	μmhos
Load Resistance	12000	7600	9000	ohms
Total Harmonic Distortion . .	11	11	15	%
Max.-Signal Power Output . .	0.35	3.4	4.5	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation	0.1 max.	megohm
For cathode-bias operation	0.5 max.	megohm

PUSH-PULL AF POWER AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	315 max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE	285 max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:		
Positive bias value	0 max.	volts
GRID-No.2 INPUT	2.8 max.	watts
PLATE DISSIPATION	8.5 max.	watts
→ PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	200 max.	volts
Heater positive with respect to cathode.	200▲max.	volts

Typical Operation:

Values are for 2 tubes

	Fixed Bias	Cathode Bias	
Plate Voltage	285	285	volts
Grid-No.2 Voltage	285	285	volts
Grid-No.1 Voltage	-25.5	-	volts
Cathode Resistor	-	400	ohms
Peak AF Grid-No.1-to-			
Grid-No.1 Voltage	51	51	volts
Zero-Signal Plate Current .	55	55	ma
Max.-Signal Plate Current .	72	61	ma
Zero-Signal Grid-No.2 Current	9	9	ma
Max.-Signal Grid-No.2 Current	17	13	ma

▲: See next page.

→ Indicates a change.



6K6-GT

6K6-GT

POWER PENTODE

	Fixed Bias	Cathode Bias	
Effective Load Resistance (Plate to plate)	12000	12000	ohms
Total Harmonic Distortion	6	4	%
Max.-Signal Power Output	10.5	9.8	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation	0.1 max.	megohm
For cathode-bias operation	0.5 max.	megohm

AF POWER AMPLIFIER - Class A₁*Triode Connection - Grid No.2 Connected to Plate***Characteristics:**

Plate Voltage	250	volts
Grid-No.1 Voltage	-18	volts
Amplification Factor	6.8	
Plate Resistance (Approx.)	2500	ohms
Transconductance	2700	μ hos
Plate Current	37.5	ma
Grid-No.1 Voltage (Approx.) for plate current of 0.5 ma	-48	volts

VERTICAL DEFLECTION AMPLIFIER*Triode Connection - Grid No.2 Connected to Plate***Maximum Ratings, Design-Center Values Except as Noted:***For operation in a 525-line, 30-frame system[□]*

DC PLATE VOLTAGE	315 max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE (Absolute maximum) [#]	1200 [■] max.	volts
PEAK NEGATIVE-PULSE GRID-No.1 VOLTAGE	-250 max.	volts
CATHODE CURRENT:		
Peak	75 max.	ma
Average	25 max.	ma
PLATE DISSIPATION	7 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	200 max.	volts
Heater positive with respect to cathode	200 [▲] max.	volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For cathode-bias operation	2.2 max.	megohms
--------------------------------------	----------	---------

[▲] The dc component must not exceed 100 volts.[□] As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission.[#] This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 percent of one vertical scanning cycle is 2.5 milliseconds.[■] Under no circumstances should this absolute value be exceeded.


← Indicates a change.

6K6-GT



6K6-GT

AVERAGE CHARACTERISTICS

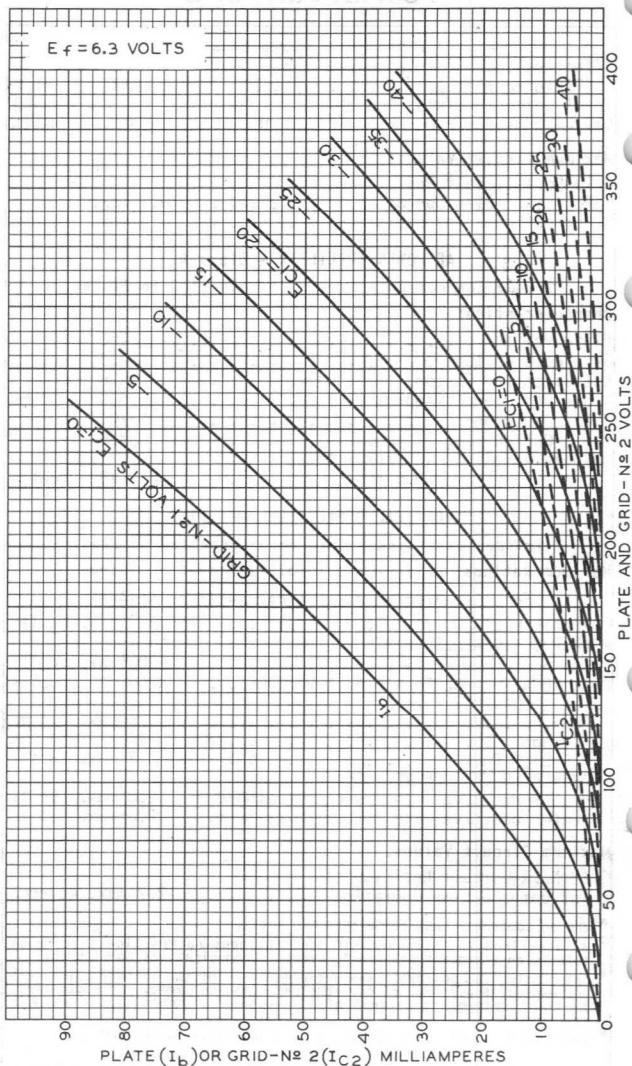

TUBE DIVISION


92CM-5209R2

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



6K6-GT

AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

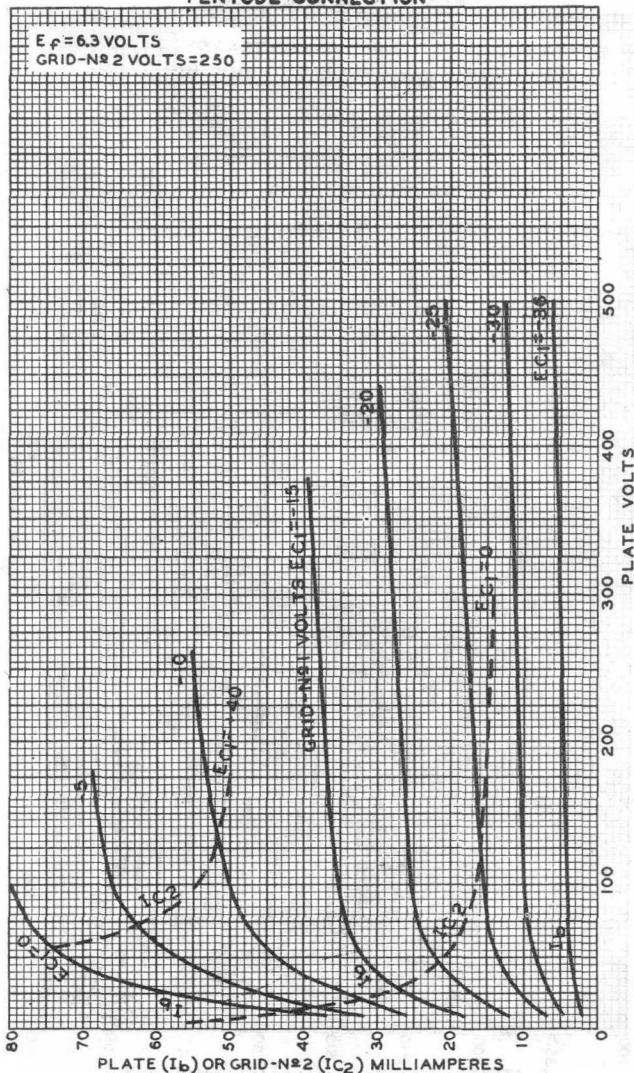

FEB. 13, 1948

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-4891R2

6K6-GT



6K6-GT

AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

$E_f = 6.3$ VOLTS

GRID - N^o2 VOLTS = 250

GRID - N^o1 (I_{C1}) MILLIAMPERES

75


50

25

0

PLATE (I_b) OR GRID - N^o2 (I_{C2}) MILLIAMPERES

PLATE VOLTS

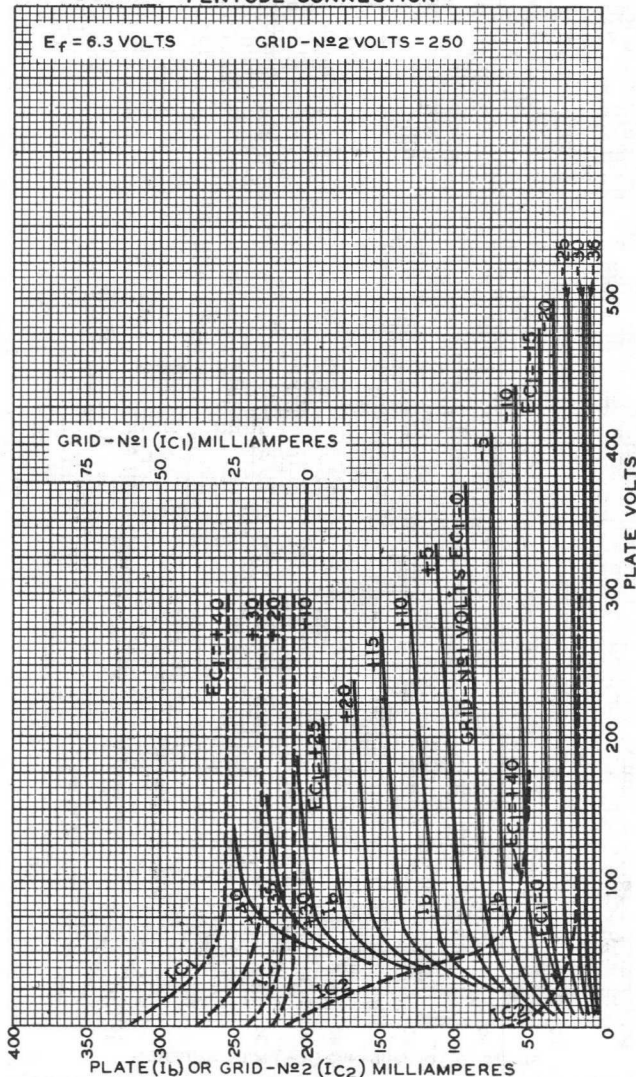

FEB. 13, 1948

TUBE DEPARTMENT


RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-631IR1



6K6-GT

6K6-GT AVERAGE PLATE CHARACTERISTICS TRIODE CONNECTION

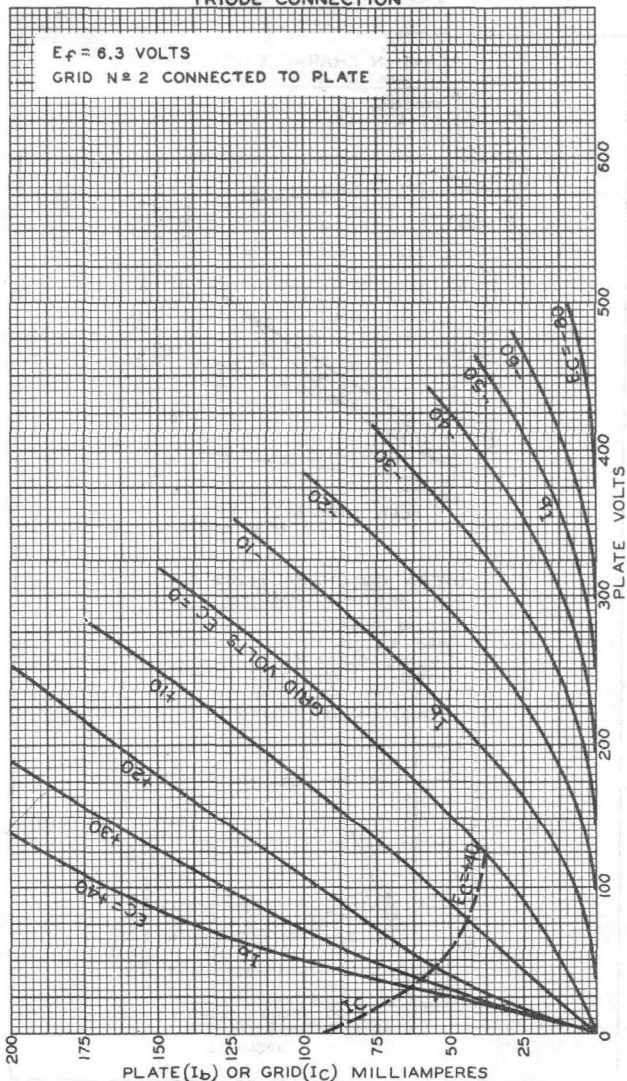

AUG. 18, 1941

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6313

6K6-GT




6K6-GT POWER PENTODE

OPERATION CHARACTERISTICS PENTODE CONNECTION

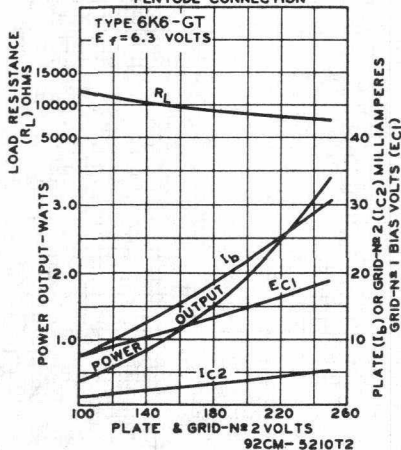

OPERATION CHARACTERISTICS PENTODE CONNECTION

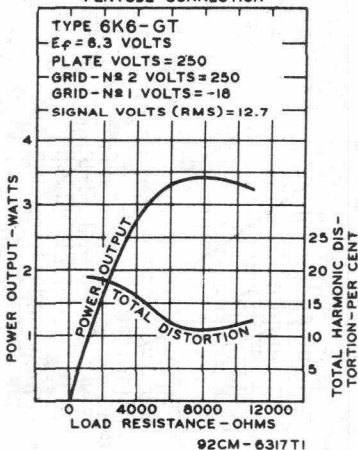

OCTOBER 1, 1951

TUBE DEPARTMENT

CE-5210T2 - 6317T1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY