

from RMA release #131,
April 11, 1938



TRIAD MANUFACTURING CO., INC.

MANUFACTURERS OF
• RADIO TUBES •
PAWTUCKET, RHODE ISLAND.

U.S.A.



#131

TRIAD MANUFACTURING CO., INC.

PLEASE ADDRESS REPLY ATTENTION OF

TENTATIVE DATA SHEET

TUBE TYPE 6P5G

Triode Amplifier Detector

HEATER RATING

Voltage (AC-DC)	6.3 Volts
Current	0.3 Amperes



DIRECT INTERELECTRODE CAPACITANCE

Grid to Plate	2.8 μmf
Grid to Cathode	3.5 μmf
Plate to Cathode	2.5 μmf

OPERATING CONDITIONS - CLASS A AMPLIFIER

Plate	250 Volts max.
Grid	-13.5 Volts
Plate Current	5.0 ma
Amplification Factor	13.8
Plate Resistance	9500 ohms
Mutual Conductance	1450 μmhos

The 6P5G is similar in design and electrical characteristics to Type 76 except for octal base.

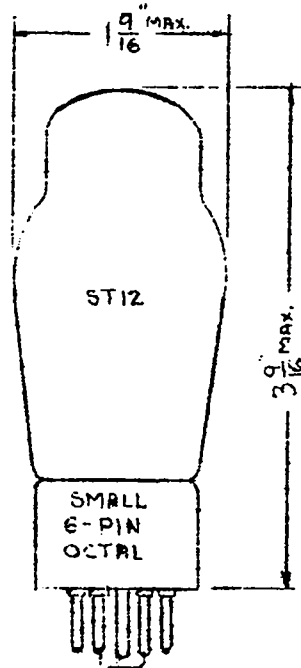

ADDRESS ALL COMMUNICATIONS DIRECT TO THE COMPANY

ALL ORDERS OR CONTRACTS ARE SUBJECT TO THE APPROVAL OF THE COMPANY