


TUNG-SOL

TRIODE

MINIATURE TYPE



GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 0.6 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW
MINIATURE BUTTON
9 PIN BASE
9AC

THE 6S4 IS A HIGH PERVEANCE TRIODE USING THE SMALL BUTTON 9 PIN MINIATURE CONSTRUCTION. IT IS DESIGNED FOR USE AS A VERTICAL DEFLECTION AMPLIFIER IN TELEVISION RECEIVERS.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD MB-210
FOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM^A

HEATER VOLTAGE	6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	200	VOLTS
MAXIMUM DC PLATE VOLTAGE	500	VOLTS
MAXIMUM DC PEAK POSITIVE-PULSE PLATE VOLTAGE ^B	2000	VOLTS
MAXIMUM DC GRID VOLTAGE	-50	VOLTS
MAXIMUM PEAK NEGATIVE-PULSE GRID VOLTAGE	-200	VOLTS
MAXIMUM DC CATHODE CURRENT	30	MA.
MAXIMUM PLATE DISSIPATION	7.5	WATTS
MAXIMUM GRID CIRCUIT RESISTANCE	2.2	MEG OHMS
MINIMUM CATHODE BIAS RESISTANCE ^C	220	OHMS

^A AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCAST STATIONS," FEDERAL COMMUNICATIONS COMMISSION.

^B THE DURATION OF THE VOLTAGE PULSE MUST NOT EXCEED 15 PERCENT OF ONE SCANNING CYCLE. IN A 525-LINE, 30-FRAME SYSTEM, 15 PERCENT OF ONE SCANNING CYCLE IS 2.5 MILLISECOND.

^C INDICATED MINIMUM VALUE OF THIS RESISTOR IS REQUIRED TO PROTECT THE TUBE IN THE EVENT OF TEMPORARY FAILURE OF EXCITATION AND RESULTANT LOSS IN DEVELOPED BIAS.

PLATE
2524
DEC. 1
1950

CONTINUED ON FOLLOWING PAGE

→ INDICATES A CHANGE OR ADDITION.

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

VERTICAL DEFLECTION AMPLIFIER

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
DC PLATE VOLTAGE	450	VOLTS
CATHODE BIAS RESISTOR	820	OHMS
GRID INPUT VOLTAGE (APPROX.):		
PEAK-TO-PEAK SAWTOOTH COMPONENT	60	VOLTS
NEGATIVE PEAKING COMPONENT	48	VOLTS
DC PLATE CURRENT	18	MA.
PLATE OUTPUT VOLTAGE (APPROX.):		
PEAK POSITIVE PULSE COMPONENT	800	VOLTS
PEAK-TO-PEAK SAWTOOTH COMPONENT	350	VOLTS

CLASS A₁ AMPLIFIER

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
PLATE VOLTAGE	250	VOLTS
GRID VOLTAGE	-8	VOLTS
PLATE CURRENT	26	MA.
PLATE RESISTANCE (APPROX.)	3600	OHMS
TRANSCONDUCTANCE	4500	μMHOS
AMPLIFICATION FACTOR	16	

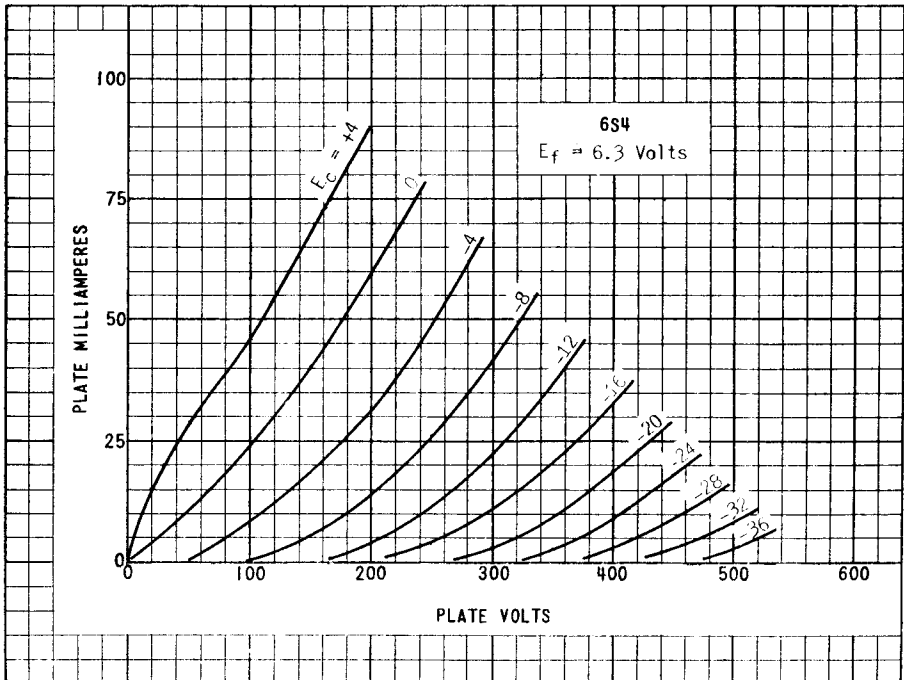


PLATE
2525
DEC. 1
1950