

6SK7-12SK7

Description and Rating

PENTODE

The 6SK7 and 12SK7 are remote-cutoff pentodes which are identical except for heater ratings. Each type is designed for use as a high-gain radio-frequency or intermediate-frequency amplifier in radio receivers. Because of its remote-cutoff characteristic, this type will handle large signal voltages without cross-modulation or modulation-distortion and is suitable for use in receivers which employ automatic-volume-control.

GENERAL

Cathode - Coated Unipotential			
Heater Voltage, A-C or D-C	6.3	12.6	Volts
Heater Current	0.3	0.15	Ampere
Envelope - MT-8, Metal Shell			
Base - B8-21, Small Wafer Octal 8-Pin			
Mounting Position - Any			

Direct Interelectrode Capacitances*

Grid-Number 1 to Plate, maximum	0.003	$\mu\mu f$
Input	6.0	$\mu\mu f$
Output	7.0	$\mu\mu f$

MAXIMUM RATINGS

DESIGN-CENTER VALUES

Plate Voltage	300	Volts
Screen-Supply Voltage	300	Volts
Screen Voltage - See Screen Rating Chart		
Positive D-C Grid-Number 1 Voltage	0	Volts
Plate Dissipation	4.0	Watts
Screen Dissipation	0.4	Watt
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode	90	Volts
Heater Negative with Respect to Cathode	90	Volts

CHARACTERISTICS AND TYPICAL OPERATION


CLASS A₁ AMPLIFIER

Plate Voltage	100	250	Volts
Suppressor Voltage ⁺	0	0	Volts
Screen Voltage	100	100	Volts
Grid-Number 1 Voltage	-1	-3	Volts
Plate Resistance, approximate	0.12	0.8	Megohm
Transconductance	2350	2000	Micromhos
Plate Current	13	9.2	Milliamperes
Screen Current	4.0	2.6	Milliamperes
Grid-Number 1 Voltage, approximate, $G_m = 10$ Micromhos	-35	-35	Volts

* With pin 1 connected to pin 5.

⁺ Pin 3 connected to pin 5 at socket.

BASING DIAGRAM




KEY
RTMA 8N
BOTTOM VIEW


TERMINAL CONNECTIONS

- Pin 1 - Shell and Internal Shield
- Pin 2 - Heater
- Pin 3 - Grid Number 3 (Suppressor)
- Pin 4 - Grid Number 1
- Pin 5 - Cathode
- Pin 6 - Grid Number 2 (Screen)
- Pin 7 - Heater
- Pin 8 - Plate


PHYSICAL DIMENSIONS

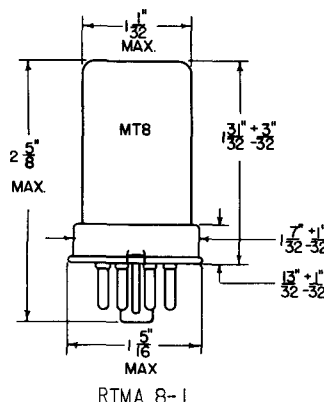


AVERAGE TRANSFER CHARACTERISTICS

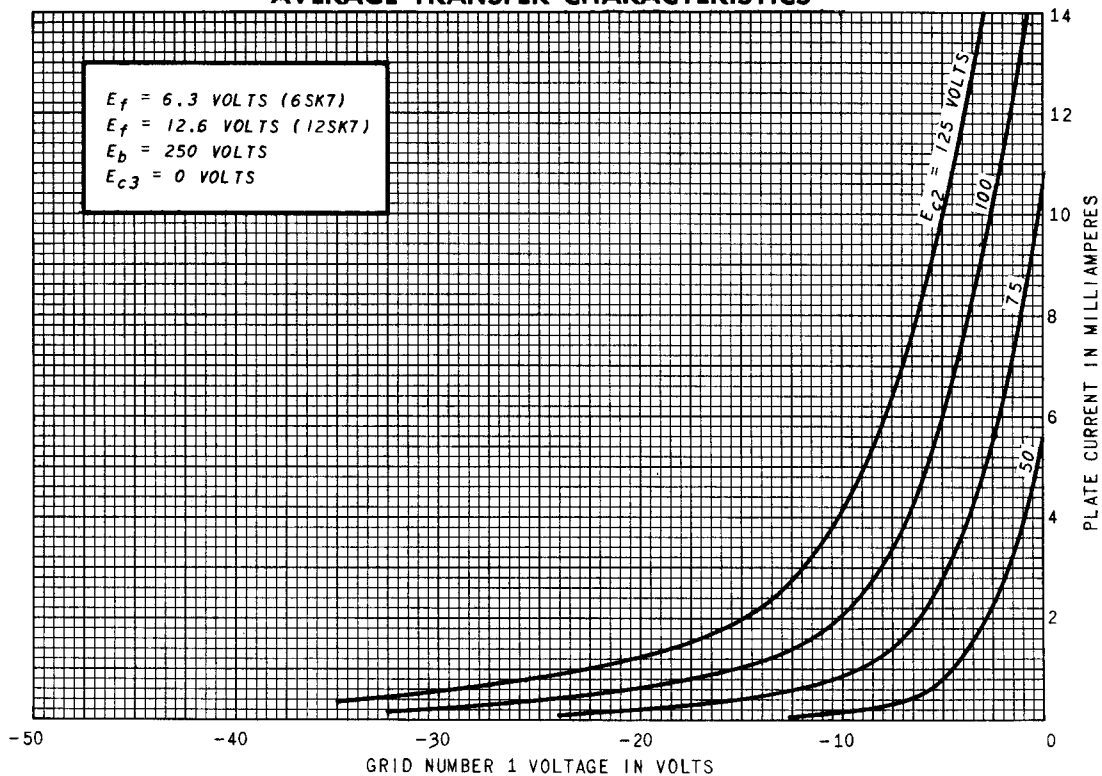


AVERAGE TRANSFER CHARACTERISTICS

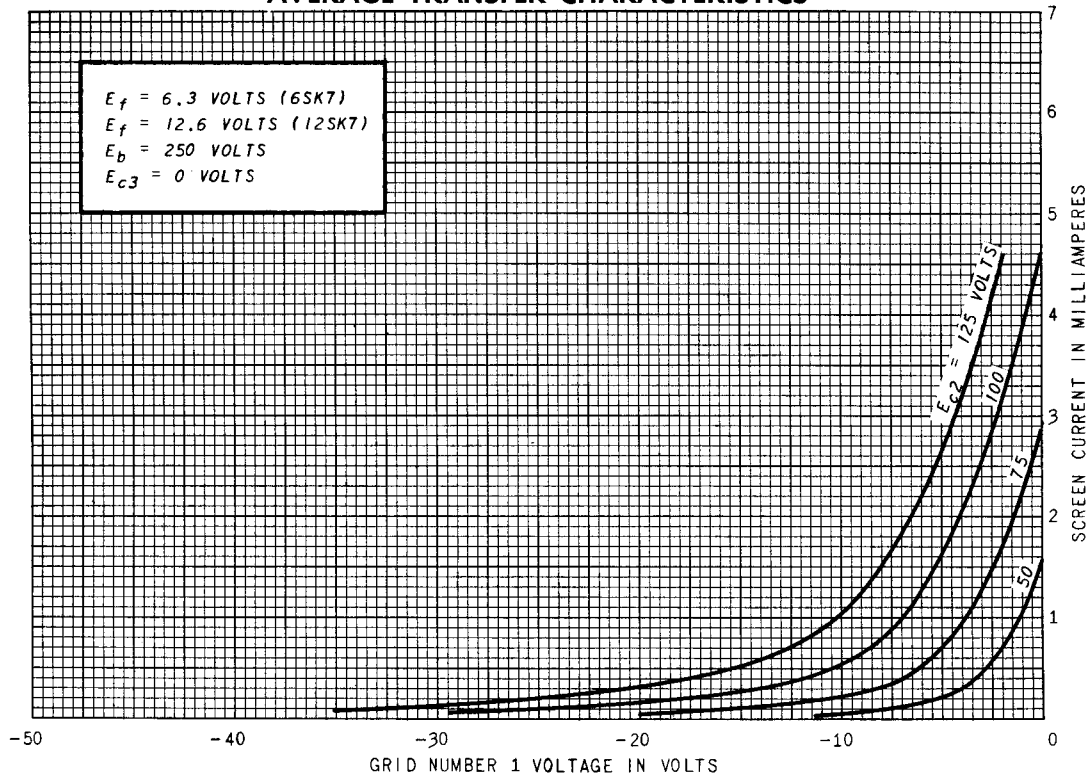


AVERAGE PLATE CHARACTERISTICS

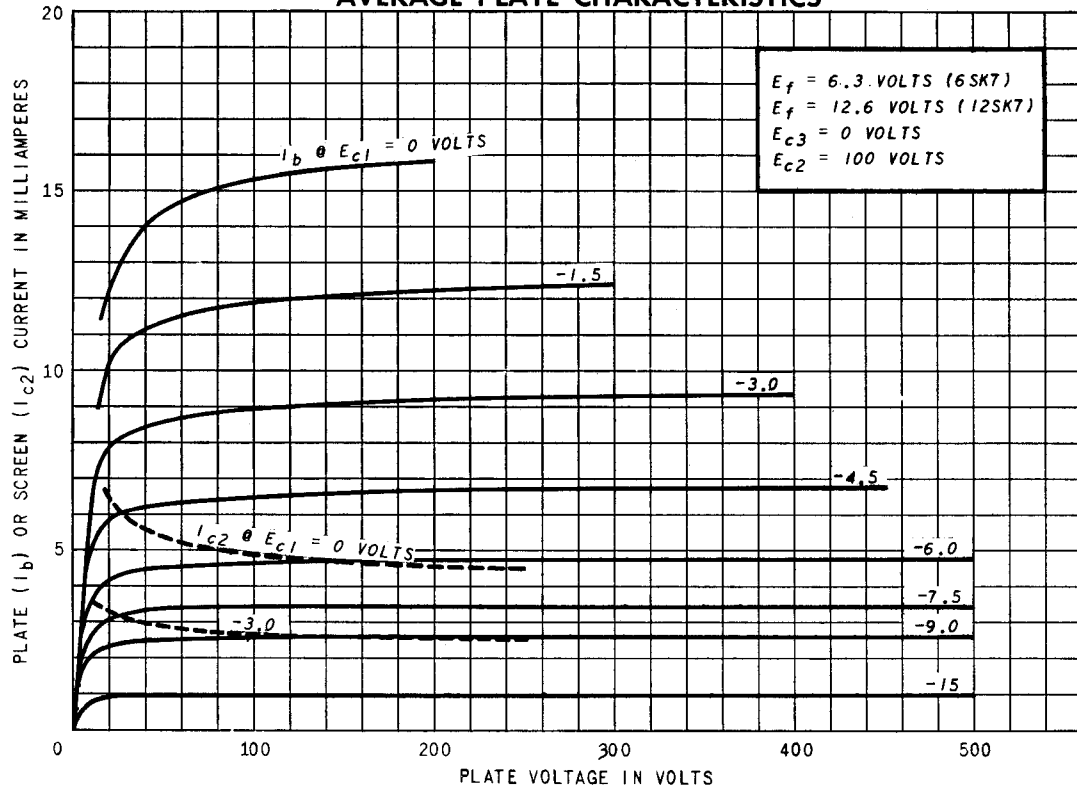

SCREEN RATING CHART

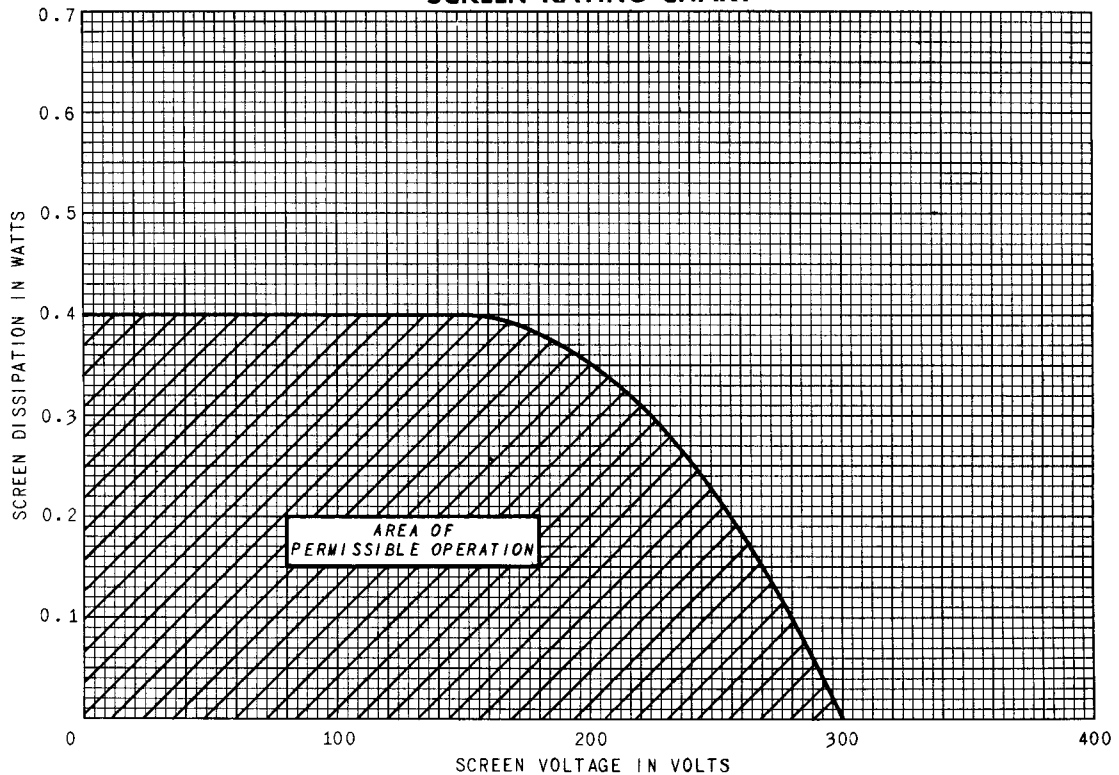

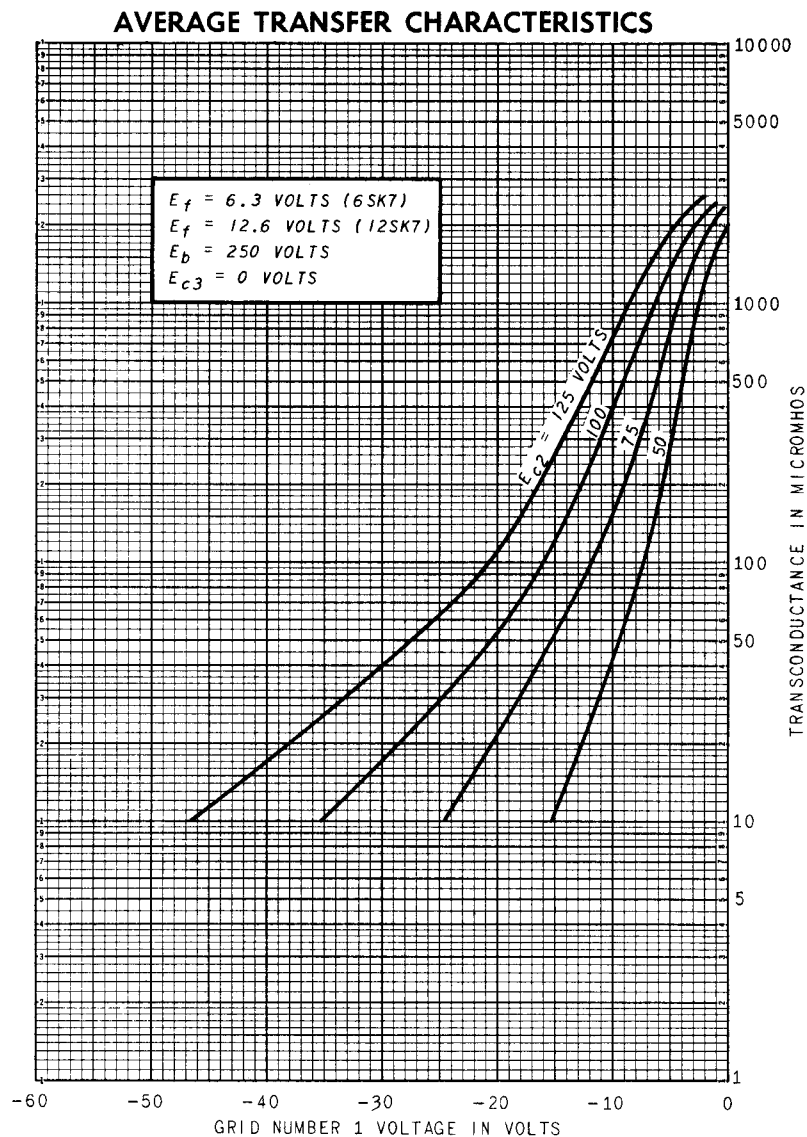

TUBE DEPARTMENT
GENERAL  **ELECTRIC**
 Schenectady 5, N. Y.