

6Z10

Compactron Pentode — Gated-Beam Discriminator

The 6Z10 is a compactron containing a gated-beam discriminator and a beam pentode. The gated-beam discriminator is suitable for FM and TV limiter and discriminator applications, and the beam pentode for audio power output service.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC* . . . 6.3±0.6 Volts

Heater Current† 0.95 Amperes

Direct Interelectrode Capacitances§

Gated-Beam Discriminator Section

Grid-Number 1 to Grid-Number 3 . . . 0.009 pf

Grid-Number 1 to All 4.4 pf

Grid-Number 3 to All 3.2 pf

Pentode Section

Grid-Number 1 to Plate. 0.22 pf

Input 11 pf

Output 7.5 pf

MECHANICAL

Operating Position - Any

Envelope - T-9, Glass

Base - E12-70, Button 12-Pin

Outline Drawing - EIA 9-58

Maximum Diameter. 1.188 Inches

Minimum Diameter. 1.062 Inches

Maximum Over-all Length . . . 2.375 Inches

Maximum Seated Height 2.000 Inches

Minimum Seated Height 1.750 Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS

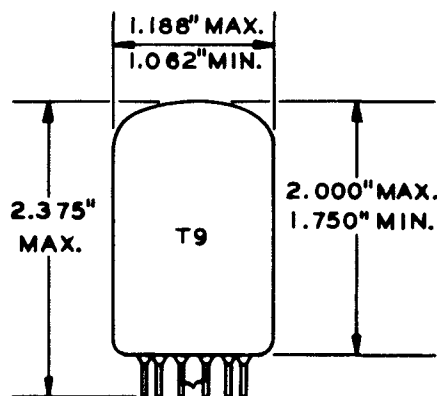


EIA 9-58

TERMINAL CONNECTIONS

- Pin 1 - Heater
- Pin 2 - Pentode Grid Number 2 (Screen)
- Pin 3 - Pentode Cathode and Beam Plates
- Pin 4 - Gated-Beam Discriminator Plate
- Pin 5 - Gated-Beam Discriminator Grid Number 3 (Quadrature)
- Pin 6 - Gated-Beam Discriminator Grid Number 2 (Accelerator)
- Pin 7 - Gated-Beam Discriminator Grid Number 1
- Pin 8 - Gated-Beam Discriminator Cathode and Internal Shields
- Pin 9 - Pentode Plate
- Pin 10 - No Connection
- Pin 11 - Pentode Grid Number 1
- Pin 12 - Heater

BASING DIAGRAM



EIA 12BT

MAXIMUM RATINGS (Cont'd)**DESIGN-MAXIMUM VALUES****Gated-Beam Discriminator Section**

Plate-Supply Voltage	330	Volts
Accelerator-Supply Voltage	330	Volts
Peak Positive Grid-Number 1 Voltage	60	Volts
DC Cathode Current	13	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component	100	Volts
Total DC and Peak	200	Volts
Heater Negative with Respect to Cathode		
Total DC and Peak	200	Volts

Pentode Section

Plate Voltage.	275	Volts
Screen Voltage	275	Volts
Plate Dissipation	10	Watts
Screen Dissipation	2.0	Watts
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component	100	Volts
Total DC and Peak	200	Volts
Heater Negative with Respect to Cathode		
Total DC and Peak	200	Volts
Grid-Number 1 Circuit Resistance		
With Fixed Bias	0.25	Megohms
With Cathode Bias	0.5	Megohms

CHARACTERISTICS AND TYPICAL OPERATION**AVERAGE CHARACTERISTICS****Gated-Beam Discriminator Section**

Plate Voltage.	135	135	135	Volts
Accelerator Voltage.	75	---	---	Volts
Accelerator-Supply Voltage	---	280	280	Volts
Accelerator Resistor	---	33000	33000	Ohms
Grid-Number 1 Voltage	0	0	0	Volts
Grid-Number 3 Voltage	+4.0	+4.0	0	Volts
Plate Current.	---	5.0	---	Milliamperes
Accelerator Current.	4.5	---	---	Milliamperes
Grid-Number 1 Transconductance	---	---	360	Micromhos
Grid-Number 3 Transconductance	---	---	700	Micromhos
Grid-Number 1 Voltage, approximate				
Ib = 20 Microamperes	---	---	-4	Volts
Grid-Number 3 Voltage, approximate				
Ib = 20 Microamperes	---	---	-4	Volts

CLASS A₁ AMPLIFIER**Pentode Section**

Plate Voltage.	250	Volts
Screen Voltage	250	Volts
Grid-Number 1 Voltage	-8.0	Volts
Peak AF Grid-Number 1 Voltage	8.0	Volts
Plate Resistance, approximate	100000	Ohms
Transconductance.	6500	Micromhos
Zero-Signal Plate Current.	35	Milliamperes
Maximum-Signal Plate Current.	39	Milliamperes
Zero-Signal Screen Current	3.0	Milliamperes
Maximum-Signal Screen Current	13	Milliamperes
Load Resistance	5000	Ohms
Total Harmonic Distortion, approximate	8.5	Percent
Maximum-Signal Power Output	4.2	Watts


NOTES

- * The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.
- † Heater current of a bogey tube at $E_f = 6.3$ volts.
- § Without external shield.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an


express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

AVERAGE PLATE CHARACTERISTICS

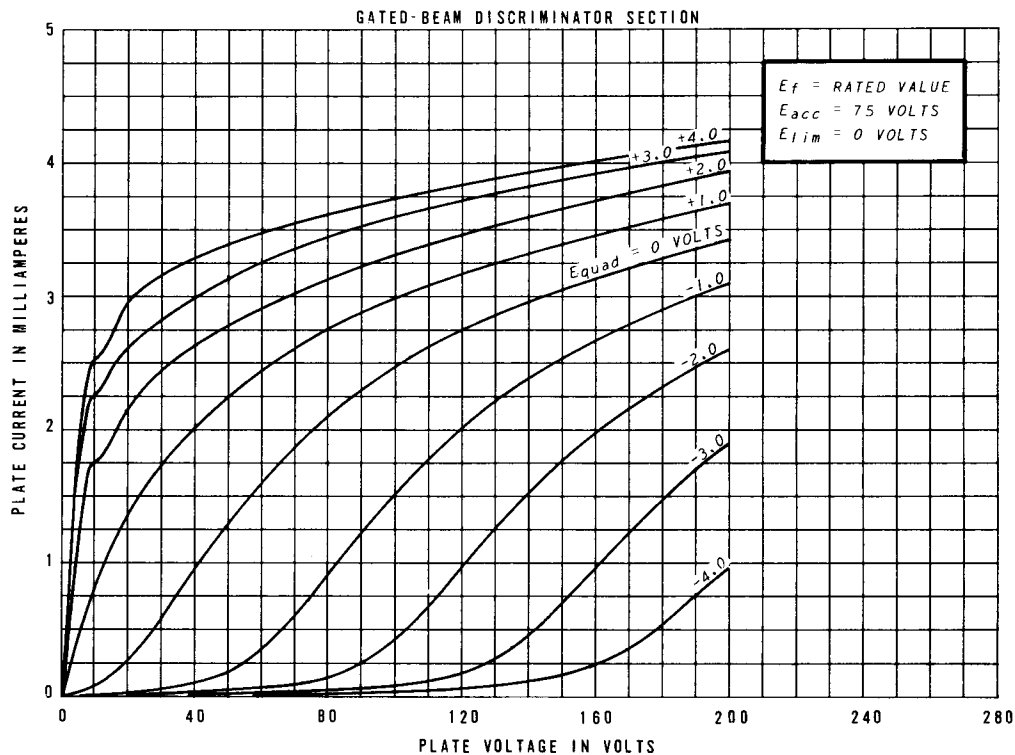

AVERAGE TRANSFER CHARACTERISTICS


GATED-BEAM DISCRIMINATOR SECTION

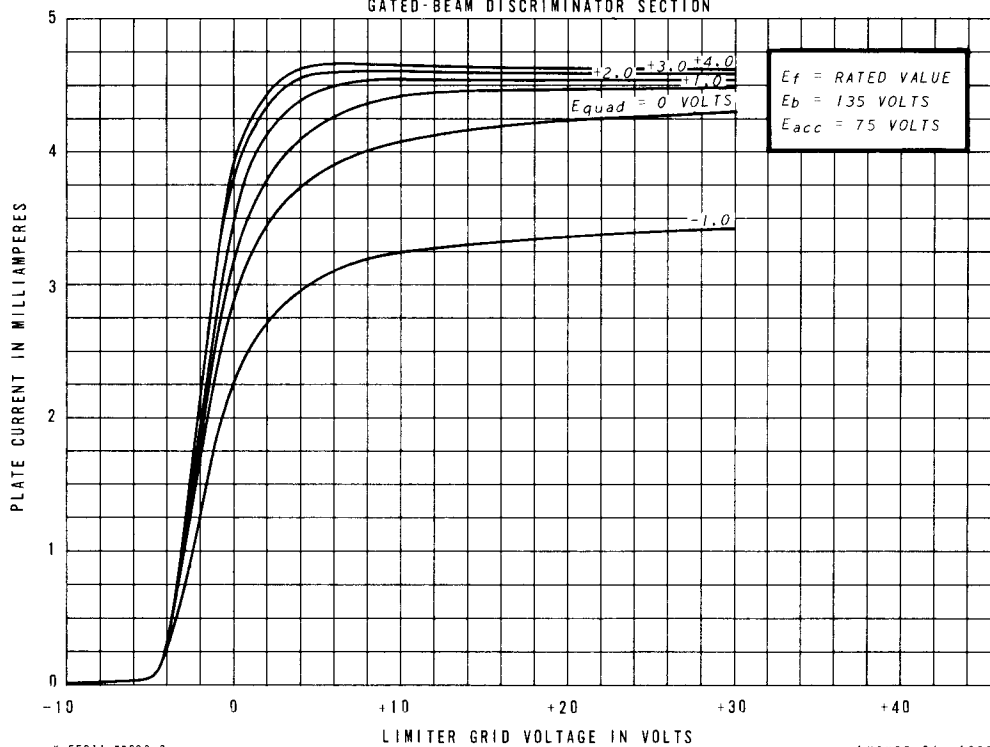

AUGUST 24, 1965


AVERAGE TRANSFER CHARACTERISTICS

GATED-BEAM DISCRIMINATOR SECTION

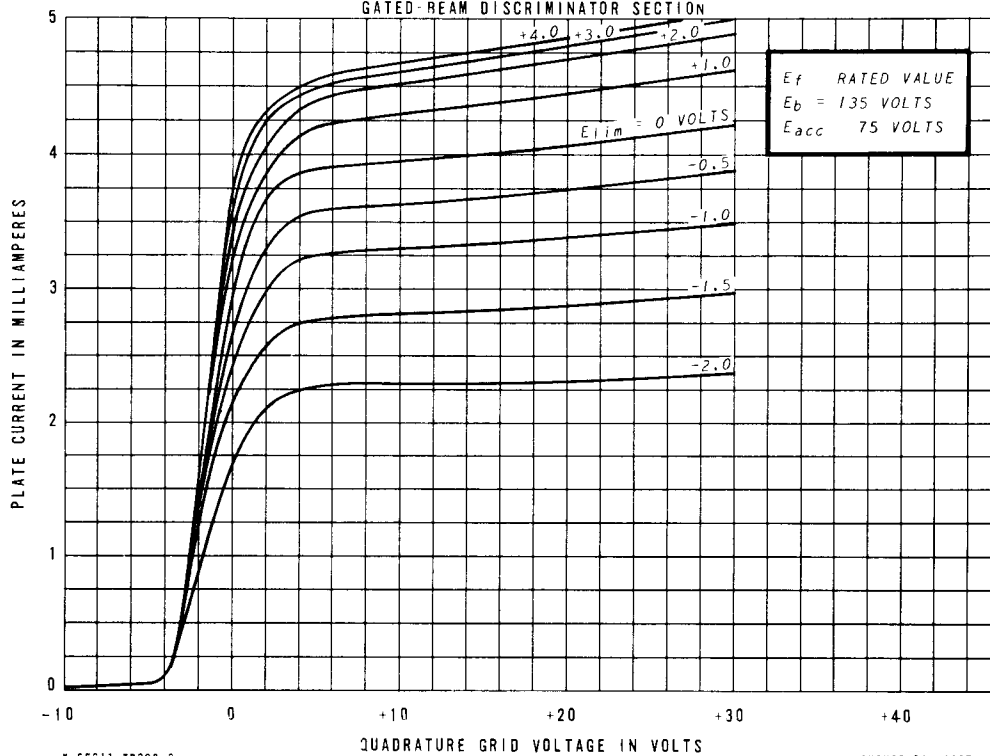


AUGUST 24, 1965

AVERAGE PLATE CHARACTERISTICS

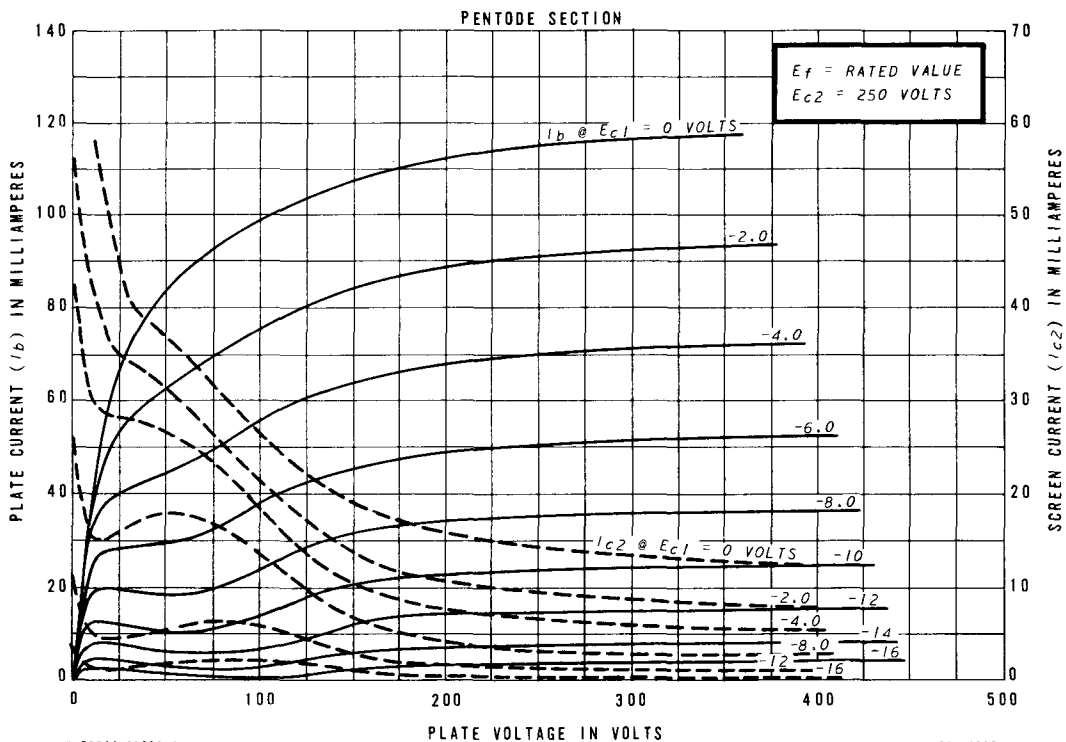


AVERAGE TRANSFER CHARACTERISTICS

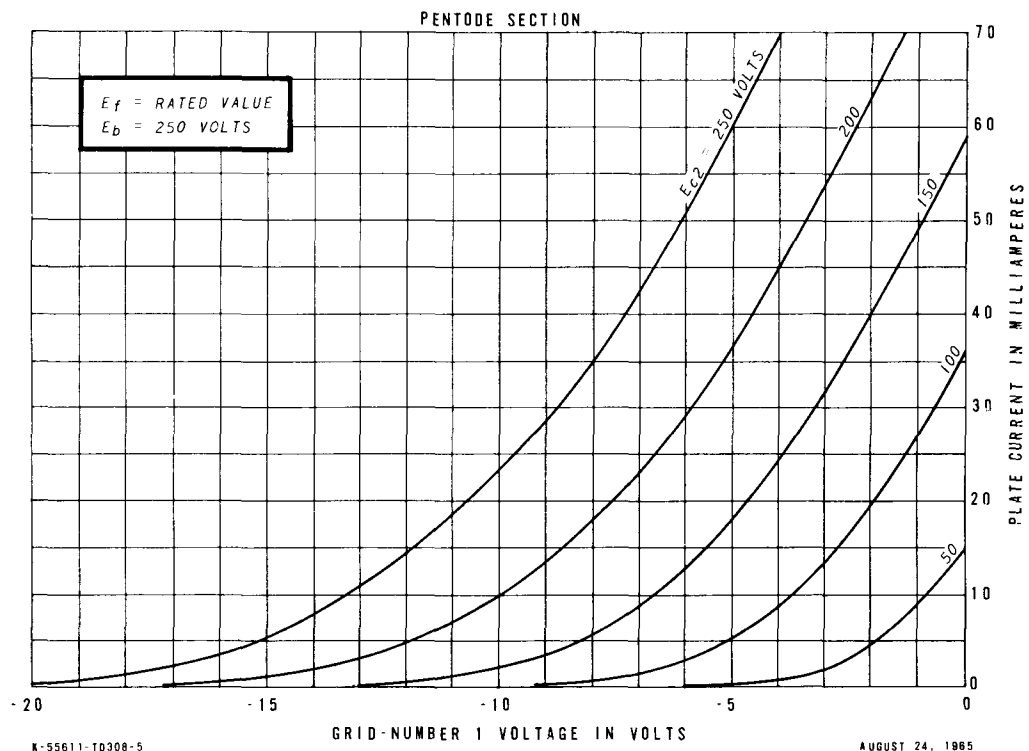


AVERAGE TRANSFER CHARACTERISTICS

PENTODE SECTION

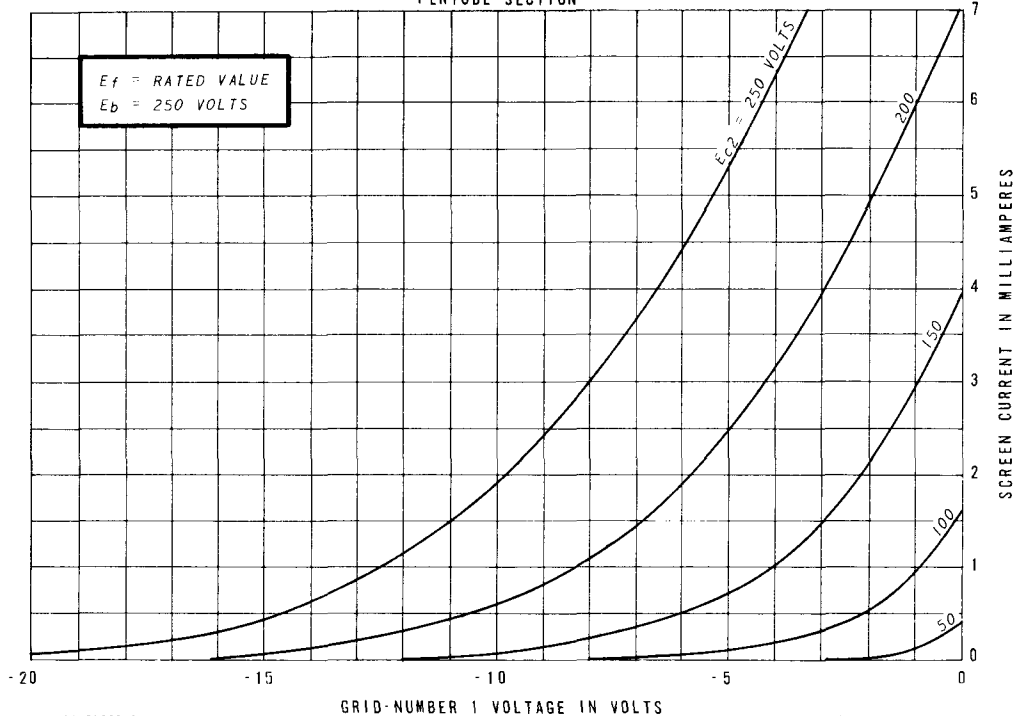

OPERATION CHARACTERISTICS

PENTODE SECTION

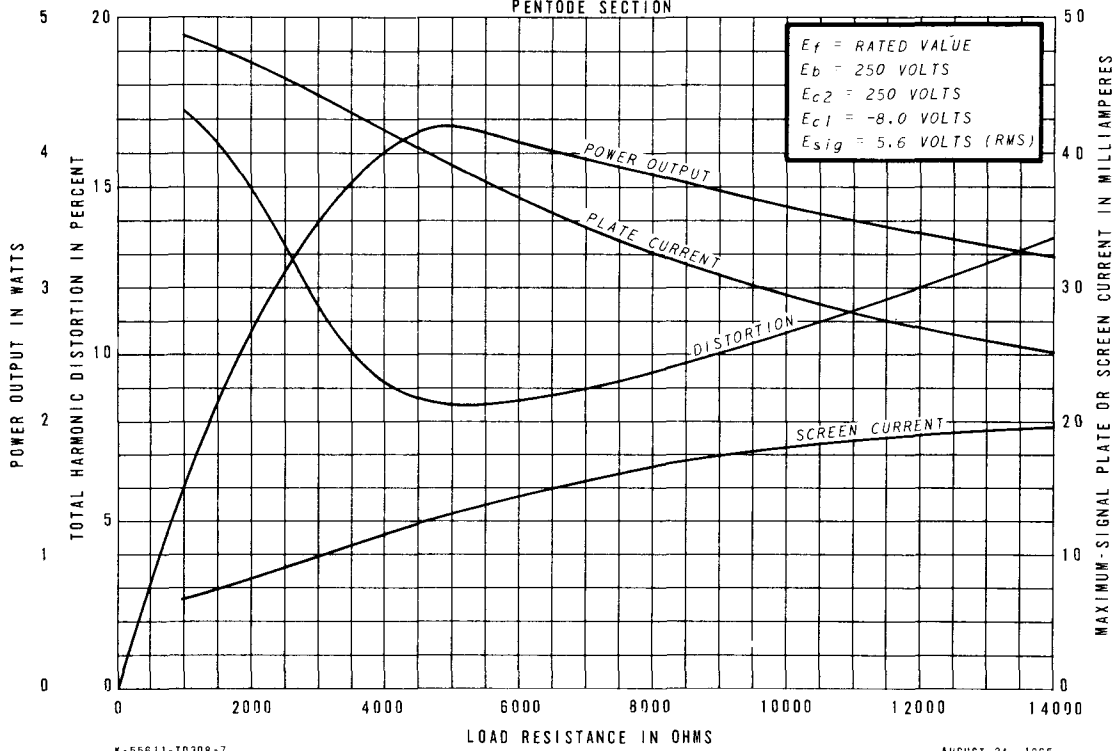

TUBE DEPARTMENT

GENERAL  ELECTRIC

Owensboro, Kentucky