

## Beam Power Tube

CERAMIC-METAL SEALS  
UNITIZED-ELECTRODE DESIGN  
FORCED-AIR COOLED

COAXIAL-ELECTRODE STRUCTURE  
INTEGRAL RADIATOR  
2500 WATTS CW INPUT

MATRIX-TYPE, OXIDE-COATED, UNIPOTENTIAL CATHODE

Useful with Full Ratings at Frequencies up to 1215 Mc

## GENERAL DATA

## Electrical:

Heater, for Matrix-Type, Oxide-Coated, Unipotential Cathode:

|                                                         |                         |                |
|---------------------------------------------------------|-------------------------|----------------|
| Voltage (AC or DC) <sup>a</sup> . . . . .               | { 5.5 typical<br>6 max. | volts<br>volts |
| Current at heater volts = 5.5 . . . . .                 | 17.3                    | amp ←          |
| Minimum heating time at heater<br>volts = 5.5 . . . . . | 5                       | minutes        |

Mu-Factor, Grid No.2 to Grid No.1

for plate volts = 2500, grid-No.2

volts = 600, and plate ma. = 600 . . . . . 17

Direct Interelectrode Capacitances:

|                                                      |            |      |
|------------------------------------------------------|------------|------|
| Grid No.1 to plate <sup>b</sup> . . . . .            | 0.17 max.  | μf   |
| Grid No.1 to cathode & heater . . . . .              | 42         | μf   |
| Plate to cathode & heater <sup>bc</sup> . . . . .    | 0.017 max. | μf ← |
| Grid No.1 to grid No.2 . . . . .                     | 55         | μf   |
| Grid No.2 to plate . . . . .                         | 16         | μf   |
| Grid No.2 to cathode & heater <sup>c</sup> . . . . . | 1.4 max.   | μf   |

## Mechanical:

|                                                               |                       |
|---------------------------------------------------------------|-----------------------|
| Operating Position . . . . .                                  | Any                   |
| Overall Length . . . . .                                      | 3.24" ± 0.10"         |
| Greatest Diameter (See <i>Dimensional Outline</i> ) . . . . . | 3.72" ± 0.03" ←       |
| Weight (Approx.) . . . . .                                    | 2 lbs                 |
| Radiator . . . . .                                            | Integral part of tube |
| Terminal Connections (See <i>Dimensional Outline</i> ):       |                       |

G<sub>1</sub> - Grid-No.1-

Terminal

Contact

Surface

G<sub>2</sub> - Grid-No.2-

Terminal

Contact

Surface

H - Heater-

Terminal

Contact

Surface

H, K - Heater- &

Cathode-

Terminal

Contact


Surface

P - Plate-

Terminal

Contact

Surface



## Thermal:

## Air Flow:

Through radiator—Adequate air flow to limit the plate-seal temperature to 250° C should be delivered by a blower

← Indicates a change.



through the radiator before and during the application of heater, plate, grid-No.2, and grid-No.1 voltages. Typical values of air flow directed through the radiator versus percentage of maximum rated plate dissipation for each class of service are shown in accompanying *Typical-Cooling-Requirements* curves. Plate power, grid-No.2 power, heater power, and air flow may be removed simultaneously.

To grid-No.2, grid-No.1, cathode, and heater seals—A sufficient quantity of air should be directed at the heater terminal and allowed to flow past each of these seals so that its temperature does not exceed the specified maximum value of 250° C. An air flow of 10 cfm is usually adequate.

Seal Temperature (Plate, grid No.2,  
grid No.1, cathode, and heater) . . . . . 250 max. °C

### LINEAR RF POWER AMPLIFIER Single-Sideband Suppressed-Carrier Service

Maximum CCS<sup>d</sup> Ratings, *Absolute-Maximum Values:*

|                                                              | Up to 1215 Mc |       |
|--------------------------------------------------------------|---------------|-------|
| DC PLATE VOLTAGE. . . . .                                    | 2500 max.     | volts |
| DC GRID-No.2 (SCREEN-GRID) VOLTAGE. . . .                    | 1000 max.     | volts |
| MAX.-SIGNAL DC PLATE CURRENT. . . . .                        | 1 max.        | amp   |
| MAX.-SIGNAL DC GRID-No.1 (CONTROL-GRID)<br>CURRENT . . . . . | 0.2 max.      | amp   |
| MAX.-SIGNAL PLATE INPUT . . . . .                            | 2500 max.     | watts |
| MAX.-SIGNAL GRID-No.2 INPUT . . . . .                        | 50 max.       | watts |
| PLATE DISSIPATION . . . . .                                  | 1500 max.     | watts |

Typical CCS Class AB<sub>1</sub> "Single-Tone" Operation:<sup>e</sup>

|                                             | Up to 60 Mc |            |
|---------------------------------------------|-------------|------------|
| DC Plate Voltage. . . . .                   | 2250        | 2500 volts |
| DC Grid-No.2 Voltage <sup>f</sup> . . . . . | 700         | 700 volts  |
| DC Grid-No.1 Voltage. . . . .               | -50         | -50 volts  |
| Zero-Signal DC Plate Current. . . . .       | 0.2         | 0.2 amp    |
| Zero-Signal DC Grid-No.2 Current. . . . .   | 0           | 0 amp      |
| Effective RF Load Resistance. . . . .       | 1100        | 1100 ohms  |
| Max.-Signal DC Plate Current. . . . .       | 0.9         | 1 amp      |
| → Max.-Signal DC Grid-No.2 Current. . . . . | 0.045       | 0.045 amp  |
| Max.-Signal DC Grid-No.1 Current. . . . .   | 0           | 0 amp      |
| Max.-Signal Peak RF Grid-No.1 Voltage . .   | 50          | 50 volts   |
| Max.-Signal Driving Power (Approx.) . . .   | 0           | 0 watts    |
| Max.-Signal Power Output (Approx.) . . .    | 1000        | 1250 watts |

### PLATE-MODULATED RF POWER AMPLIFIER — Class C Telephony

*Carrier conditions per tube for use  
with maximum modulation factor of 1*

Maximum CCS<sup>d</sup> Ratings, *Absolute-Maximum Values:*

|                                           | Up to 1215 Mc |       |
|-------------------------------------------|---------------|-------|
| DC PLATE VOLTAGE. . . . .                 | 2000 max.     | volts |
| DC GRID-No.2 (SCREEN-GRID) VOLTAGE. . . . | 1000 max.     | volts |
| → Indicates a change.                     |               |       |



|                                              |           |       |
|----------------------------------------------|-----------|-------|
| DC GRID-No.1 (CONTROL-GRID) VOLTAGE. . . . . | -300 max. | volts |
| DC PLATE CURRENT . . . . .                   | 0.85 max. | amp   |
| DC GRID-No.1 CURRENT . . . . .               | 0.2 max.  | amp   |
| PLATE INPUT. . . . .                         | 1700 max. | watts |
| GRID-No.2 INPUT. . . . .                     | 35 max.   | watts |
| PLATE DISSIPATION. . . . .                   | 1000 max. | watts |

**Typical CCS Operation:***In grid-drive circuit at 600 Mc*

|                                                      |                  |                  |       |
|------------------------------------------------------|------------------|------------------|-------|
| DC Plate Voltage . . . . .                           | 1800             | 2000             | volts |
| DC Grid-No.2 Voltage <sup>g</sup> . . . . .          | 500              | 500              | volts |
| DC Grid-No.1 Voltage <sup>h</sup> . . . . .          | -30              | -30              | volts |
| DC Plate Current . . . . .                           | 0.75             | 0.83             | amp   |
| DC Grid-No.2 Current . . . . .                       | 0.015            | 0.015            | amp   |
| DC Grid-No.1 Current (Approx.) . . . . .             | 0.04             | 0.04             | amp   |
| Driver Power Output (Approx.) <sup>j</sup> . . . . . | 50               | 55               | watts |
| Useful Power Output (Approx.) . . . . .              | 650 <sup>k</sup> | 800 <sup>k</sup> | watts |

**Maximum Circuit Values:**

|                                                              |                        |      |
|--------------------------------------------------------------|------------------------|------|
| Grid-No.1-Circuit Resistance under<br>any condition. . . . . | 5000 <sup>l</sup> max. | ohms |
|--------------------------------------------------------------|------------------------|------|

**RF POWER AMPLIFIER & OSCILLATOR — Class C Telegraphy<sup>m</sup>  
and****RF POWER AMPLIFIER — Class C FM Telephony****Maximum CCS<sup>d</sup> Ratings, Absolute-Maximum Values:***Up to 1215 Mc*

|                                              |           |       |
|----------------------------------------------|-----------|-------|
| DC PLATE VOLTAGE . . . . .                   | 2500 max. | volts |
| DC GRID-No.2 (SCREEN-GRID) VOLTAGE . . . . . | 1000 max. | volts |
| DC GRID-No.1 (CONTROL-GRID) VOLTAGE. . . . . | -300 max. | volts |
| DC PLATE CURRENT . . . . .                   | 1 max.    | amp   |
| DC GRID-No.1 CURRENT . . . . .               | 0.2 max.  | amp   |
| PLATE INPUT. . . . .                         | 2500 max. | watts |
| GRID-No.2 INPUT. . . . .                     | 50 max.   | watts |
| PLATE DISSIPATION. . . . .                   | 1500 max. | watts |

**Typical CCS Operation:***In grid-drive circuit at 600 Mc*

|                                                      |                   |                   |       |
|------------------------------------------------------|-------------------|-------------------|-------|
| DC Plate Voltage . . . . .                           | 2250              | 2500              | volts |
| DC Grid-No.2 Voltage <sup>n</sup> . . . . .          | 500               | 500               | volts |
| DC Grid-No.1 Voltage <sup>p</sup> . . . . .          | -30               | -30               | volts |
| DC Plate Current . . . . .                           | 0.9               | 1                 | amp   |
| DC Grid-No.2 Current . . . . .                       | 0.02              | 0.02              | amp   |
| DC Grid-No.1 Current (Approx.) . . . . .             | 0.07              | 0.07              | amp   |
| Driver Power Output (Approx.) <sup>j</sup> . . . . . | 70                | 75                | watts |
| Useful Power Output (Approx.) . . . . .              | 1050 <sup>k</sup> | 1350 <sup>k</sup> | watts |

**Maximum Circuit Values:**

|                                                              |                        |      |
|--------------------------------------------------------------|------------------------|------|
| Grid-No.1-Circuit Resistance under<br>any condition. . . . . | 5000 <sup>k</sup> max. | ohms |
|--------------------------------------------------------------|------------------------|------|



- a Because the cathode is subjected to considerable back bombardment as the frequency is increased with resultant increase in temperature, the heater voltage should be reduced depending on operating conditions and frequency to prevent overheating the cathode and resultant short life.
- b With external, flat, metal shield having diameter of 8" and center hole approximately 3" in diameter provided with spring fingers that connect the shield to grid-No.2 terminal. Shield is located in plane of grid-No.2 terminal perpendicular to the tube axis.
- c With external, flat, metal shield having diameter of 8" and center hole approximately 2-3/8" in diameter provided with spring fingers that connect the shield to grid-No.1 terminal. Shield is located in plane of grid-No.1 terminal perpendicular to the tube axis.
- d Continuous Commercial Service.
- e "Single-Tone" operation refers to that class of amplifier service in which the grid-No.1 input consists of a monofrequency rf signal having constant amplitude. This signal is produced in a single-sideband suppressed-carrier system when a single audio frequency of constant amplitude is applied to the input of the system.
- f Preferably obtained from a fixed supply.
- g Obtained preferably from a separate source modulated along with the plate supply.
- h Obtained from grid-No.1 resistor or from a combination of grid-No.1 resistor with either fixed supply or cathode resistor.
- j The driver stage is required to supply tube losses and rf-circuit losses. It should be designed to provide an excess of power above the indicated value to take care of variations in line voltage, in components, in initial tube characteristics, and in tube characteristics during life.
- k This value of useful power is measured in load of output circuit.
- l If this value is insufficient to provide adequate bias, the additional required bias must be supplied by a cathode resistor or fixed supply.
- m Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.
- n Obtained preferably from a fixed supply, or from the plate-supply voltage with a voltage divider.
- p Obtained from fixed supply, by grid-No.1 resistor, by cathode resistor, or by combination methods.

## SPECIAL TESTS & PERFORMANCE DATA

Design samples of the 7213 have been subjected to the following tests without adverse effects.

### Variable-Frequency Vibration Performance:


This test was performed (per MIL-E-1C<sup>q</sup>, paragraph 4.9.20.3) under the following conditions: heater volts = 5.5, plate-supply volts = 450, grid-No.2 volts = 300, grid-No.1 voltage varied to give a plate current of 10 milliamperes, and plate load resistor (ohms) = 2000. The tubes were vibrated in each of 3 positions through frequency range from 10 to 50 to 10 cycles per second. The vibrating frequency had a fixed amplitude of 0.040 inch (total excursion of 0.080 inch). During the test, the tubes did not show an rms output voltage across the plate load resistor in excess of 500 millivolts. ← At the end of this test, the tubes did not show tap or permanent interelectrode shorts or defects that would cause the tubes to be inoperable. The tubes exhibited no pronounced mechanical resonance during this test.

<sup>q</sup> Military Specification, Electron Tubes and Crystal Rectifiers, 3 October 1955.

← Indicates a change.

**Fatigue Performance:**

In this test (per MIL-E-1C, paragraph 4.9.20.6), the tubes were rigidly mounted and subjected to 2.5 g vibrational acceleration at 25 cycles per second for 32 hours in each of three positions with heater volts = 5.5. At the end of this test, the tubes did not show permanent or temporary shorts or open circuits, and passed all electrical tests.

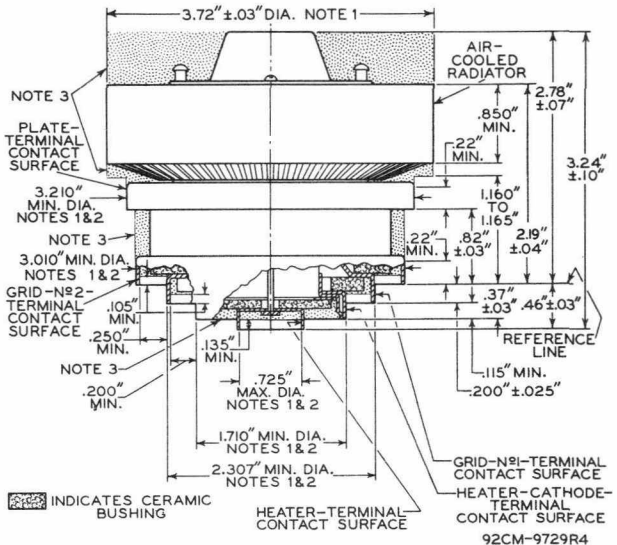


**NOTE 1:** WITH THE CYLINDRICAL SURFACES OF THE RADIATOR BAND, PLATE TERMINAL, GRID-No.2 TERMINAL, GRID-No.1 TERMINAL, HEATER-CATHODE TERMINAL, AND HEATER TERMINAL CLEAN, SMOOTH, AND FREE OF BURRS, THE TUBE WILL ENTER A GAUGE AS SHOWN IN SKETCH G<sub>1</sub>. PROPER ENTRY OF THE TUBE IS OBTAINED WHEN THE GRID-No.2 TERMINAL IS SEATED ON THE SHOULDER A-A'. THE TUBE IS PROPERLY SEATED ON THE SHOULDER WHEN A 0.010"-THICKNESS GAUGE 1/8" WIDE WILL NOT ENTER MORE THAN 1/16" BETWEEN THE SHOULDER SURFACE AND THE GRID-No.2 TERMINAL. THE GAUGE IS PROVIDED WITH SLOTS TO PERMIT MAKING MEASUREMENT OF SEATING OF GRID-No.2 TERMINAL ON SHOULDER A-A'.

**NOTE 2:** THE DIAMETER OF EACH TERMINAL IS HELD TO INDICATED VALUES ONLY OVER THE INDICATED MINIMUM LENGTH OF ITS CONTACT SURFACE.

**NOTE 3:** KEEP ALL STIPPLED REGIONS CLEAR. DO NOT ALLOW CONTACTS OR CIRCUIT COMPONENTS TO PROTRUDE INTO THESE ANNULAR VOLUMES.

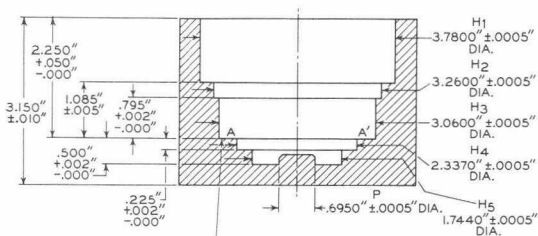


GAUGE SKETCH G<sub>1</sub>

REFERENCE \*  
SURFACE A-A'

\* THIS SURFACE IS FLAT WITHIN .0005" PEAK TO VALLEY AND IS PERPENDICULAR TO THE AXIS OF THE CYLINDRICAL HOLES WITHIN .00025".

THE AXES OF THE CYLINDRICAL HOLES H<sub>1</sub> THROUGH H<sub>5</sub> AND THE AXIS OF POST P ARE COINCIDENT WITHIN .001".




92CM-9735R2



7213

7213

## TYPICAL COOLING REQUIREMENTS

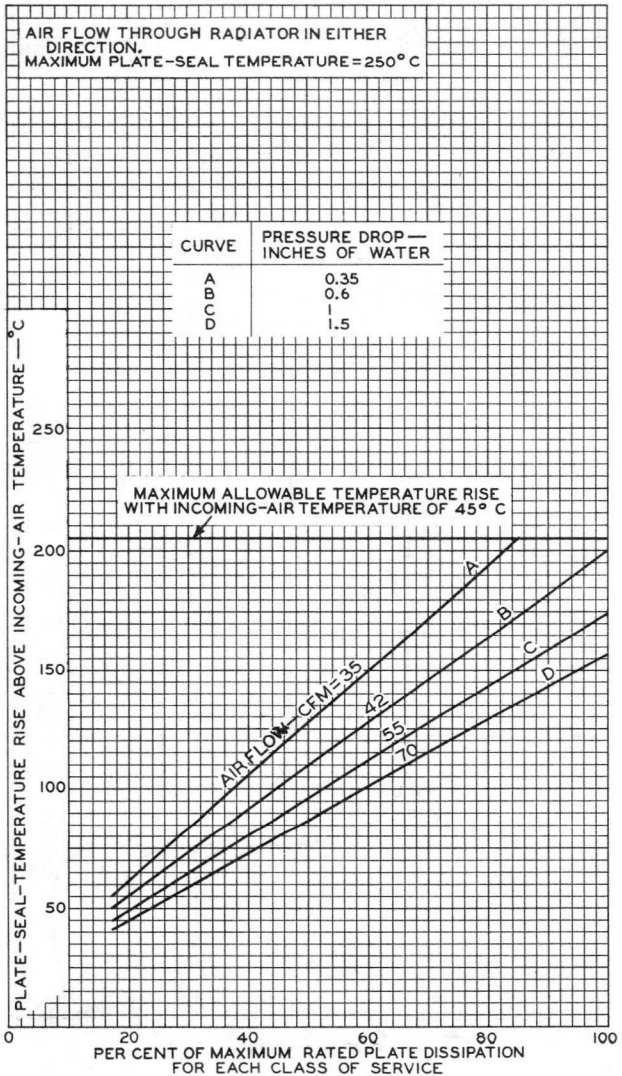

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9737

7213



7213

## TYPICAL PLATE CHARACTERISTICS

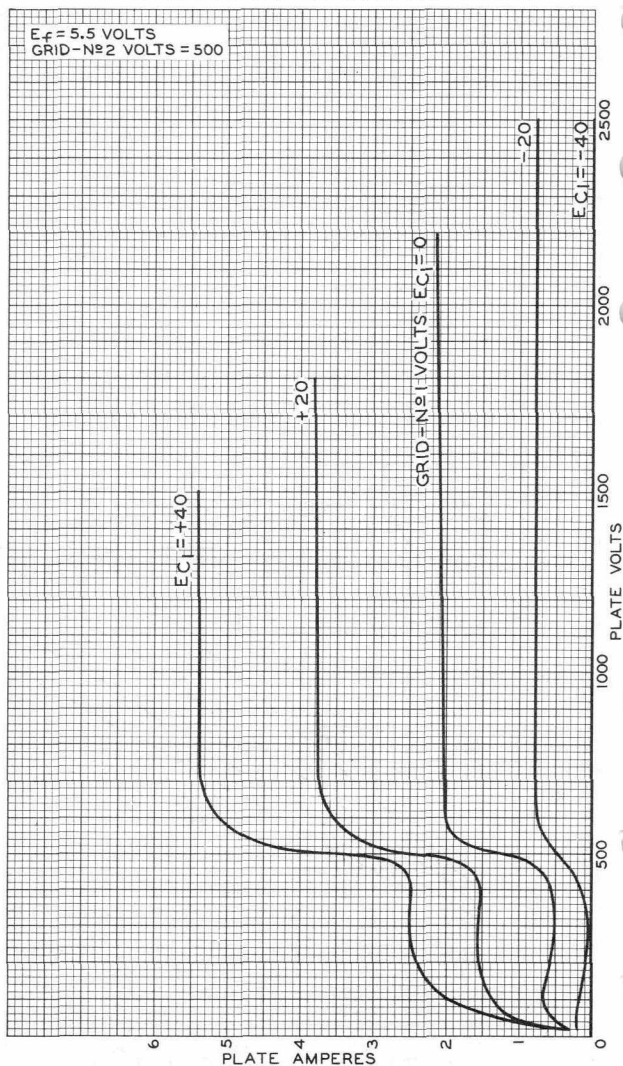




7213

7213

## TYPICAL PLATE CHARACTERISTICS

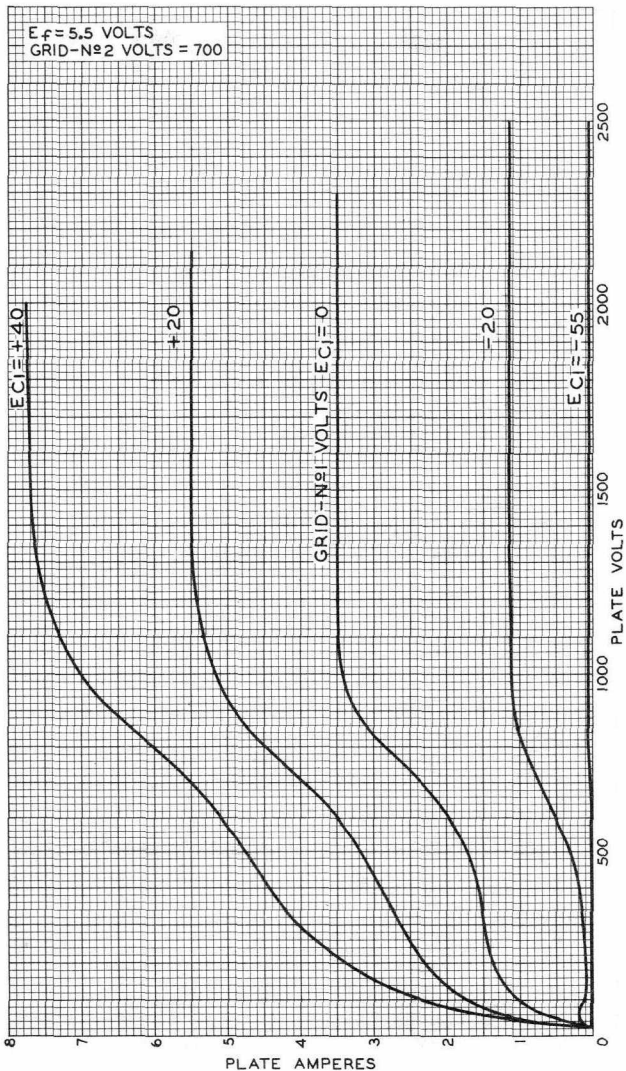


7213



7213

## TYPICAL CHARACTERISTICS

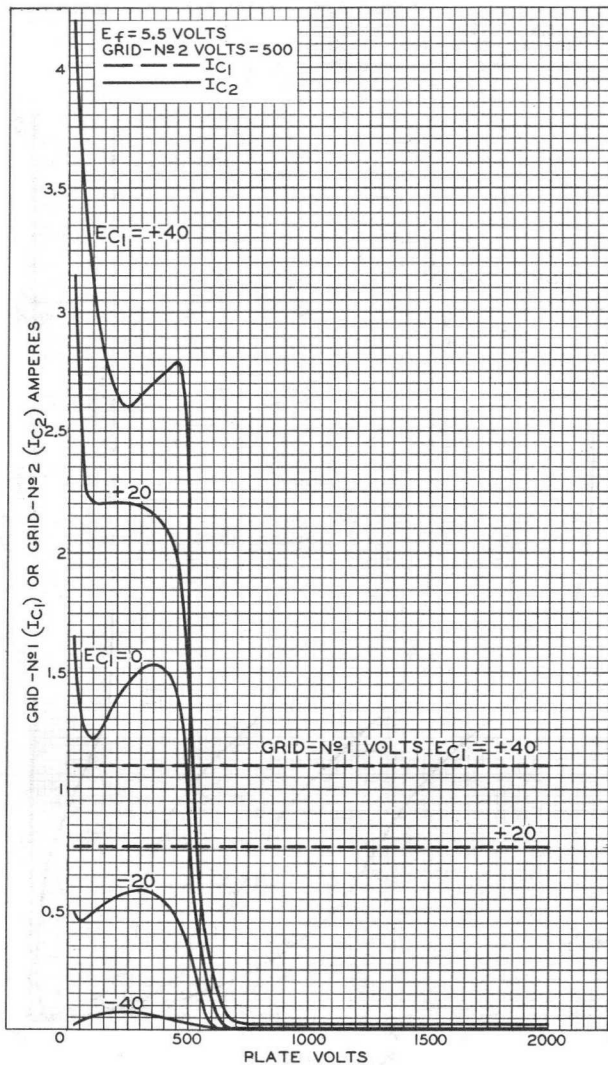




7213

7213

## TYPICAL CHARACTERISTICS

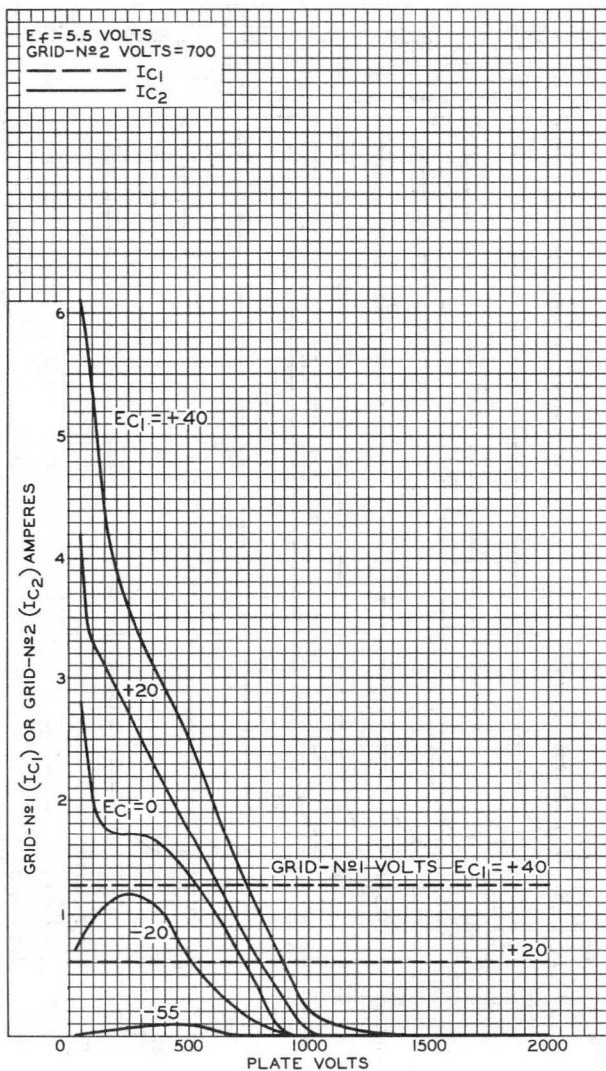


7213



7213

## TYPICAL CONSTANT-CURRENT CHARACTERISTICS

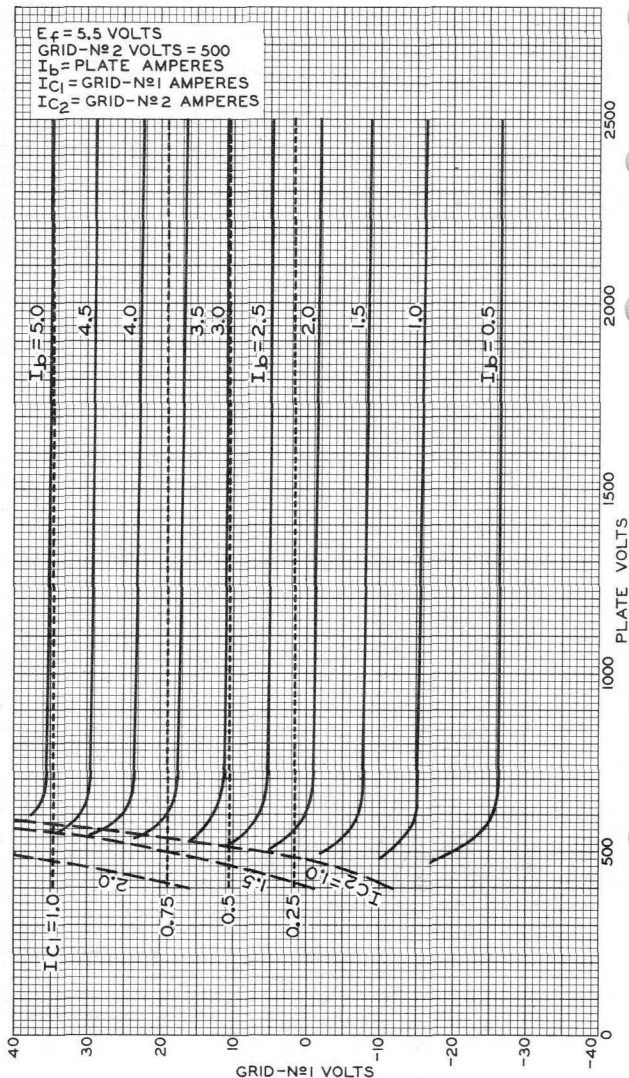

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-9744



7213


7213

## TYPICAL CONSTANT-CURRENT CHARACTERISTICS

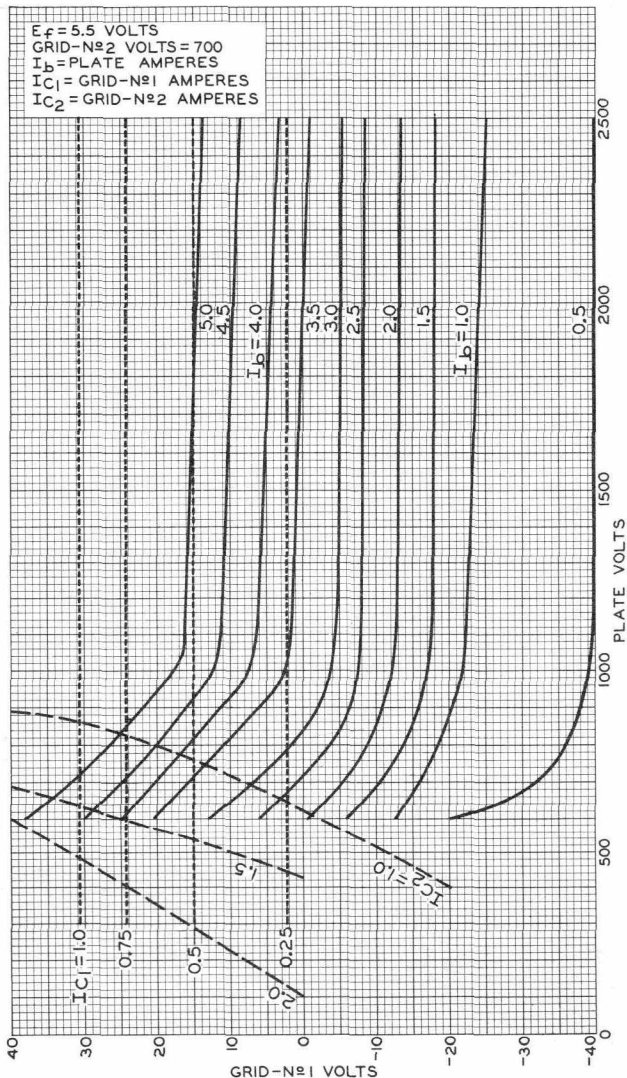

7-9  
1952

U.S. AIR FORCE - 1-10-52

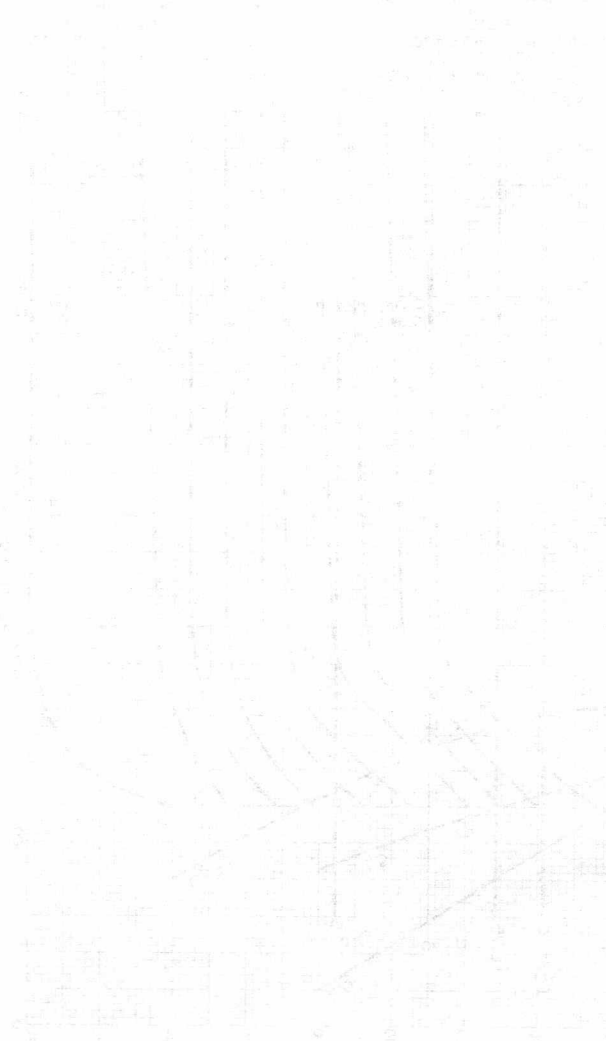

U.S. AIR FORCE

ENGINEERING

1-10-52