

BEAM PENTODE

FOR AF POWER AMPLIFIER APPLICATIONS

DESCRIPTION AND RATING

The 7355 is a beam-power pentode primarily designed for use in the power-output stage of high-fidelity audio-frequency amplifier systems.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC*..... 6.3 ± 0.6 Volts

Heater Current†..... 0.8 Amperes

Direct Interelectrode Capacitances, approximate‡

Grid-Number 1 to Plate: (g1 to p)..... 0.5 pf

Input: g1 to (h+k+g2+b.p.)..... 13 pf

Output: p to (h+k+g2+b.p.)..... 6.0 pf

MECHANICAL

Mounting Position—Any

Envelope—T-9, Glass

Base—B6-229, Intermediate-Shell Octal 6-Pin with external barriers

MAXIMUM RATINGS

DESIGN-MAXIMUM VALUES

Plate Voltage.....	500	Volts
Screen Voltage.....	400	Volts
Positive DC Grid-Number 1 Voltage.....	0	Volts
Plate Dissipation.....	18	Watts
Screen Dissipation (Continuous).....	3.5	Watts
Screen Dissipation (Peaks of Speech and Music).....	7.0	Watts
DC Cathode Current.....	100	Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component.....	100	Volts
Total DC and Peak.....	200	Volts
Heater Negative with Respect to Cathode		
Total DC and Peak.....	200	Volts
Grid-Number 1 Circuit Resistance		
With Fixed Bias.....	0.3	Megohms
With Cathode Bias.....	1.0	Megohms


Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.


BASING DIAGRAM



TERMINAL CONNECTIONS

- Pin 2—Heater
- Pin 3—Plate
- Pin 5—Cathode and Beam Plates
- Pin 6—Grid Number 1
- Pin 7—Heater
- Pin 8—Grid Number 2 (Screen)

PHYSICAL DIMENSIONS

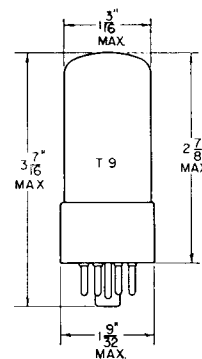

CHARACTERISTICS AND TYPICAL OPERATION

CLASS A₁ AMPLIFIER

Plate Voltage	250	Volts
Screen Voltage	225	Volts
Grid-Number 1 Voltage	-15	Volts
Peak AF Grid-Number 1 Voltage	15	Volts
Plate Resistance, approximate	42000	Ohms
Transconductance	7600	Micromhos
Zero-Signal Plate Current	62	Milliamperes
Maximum-Signal Plate Current	74	Milliamperes
Zero-Signal Screen Current	3.2	Milliamperes
Maximum-Signal Screen Current	16.5	Milliamperes
Load Resistance	2500	Ohms
Total Harmonic Distortion, approximate	15	Percent
Maximum-Signal Power Output	9.0	Watts
Grid-Number 1 Voltage, approximate I _b = 500 Microamperes	-35	Volts

PUSH-PULL CLASS AB₁ AMPLIFIER, VALUES FOR TWO TUBES


Plate Voltage	300	400	Volts
Screen Voltage	250	300	Volts
Grid-Number 1 Voltage	-21	-34	Volts
Peak AF Grid-to-Grid Voltage	42	60	Volts
Zero-Signal Plate Current	100	56	Milliamperes
Maximum-Signal Plate Current	185	175	Milliamperes
Zero-Signal Screen Current	5.5	3.5	Milliamperes
Maximum-Signal Screen Current	24	24	Milliamperes
Effective Load Resistance, Plate-to-Plate	4000	5000	Ohms
Total Harmonic Distortion	2.0	6.0	Percent
Maximum-Signal Power Output	28.5	40	Watts

* The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.


† Heater current of a bogey tube at E_f = 6.3 volts.

‡ Without external shield.


AVERAGE PLATE CHARACTERISTICS

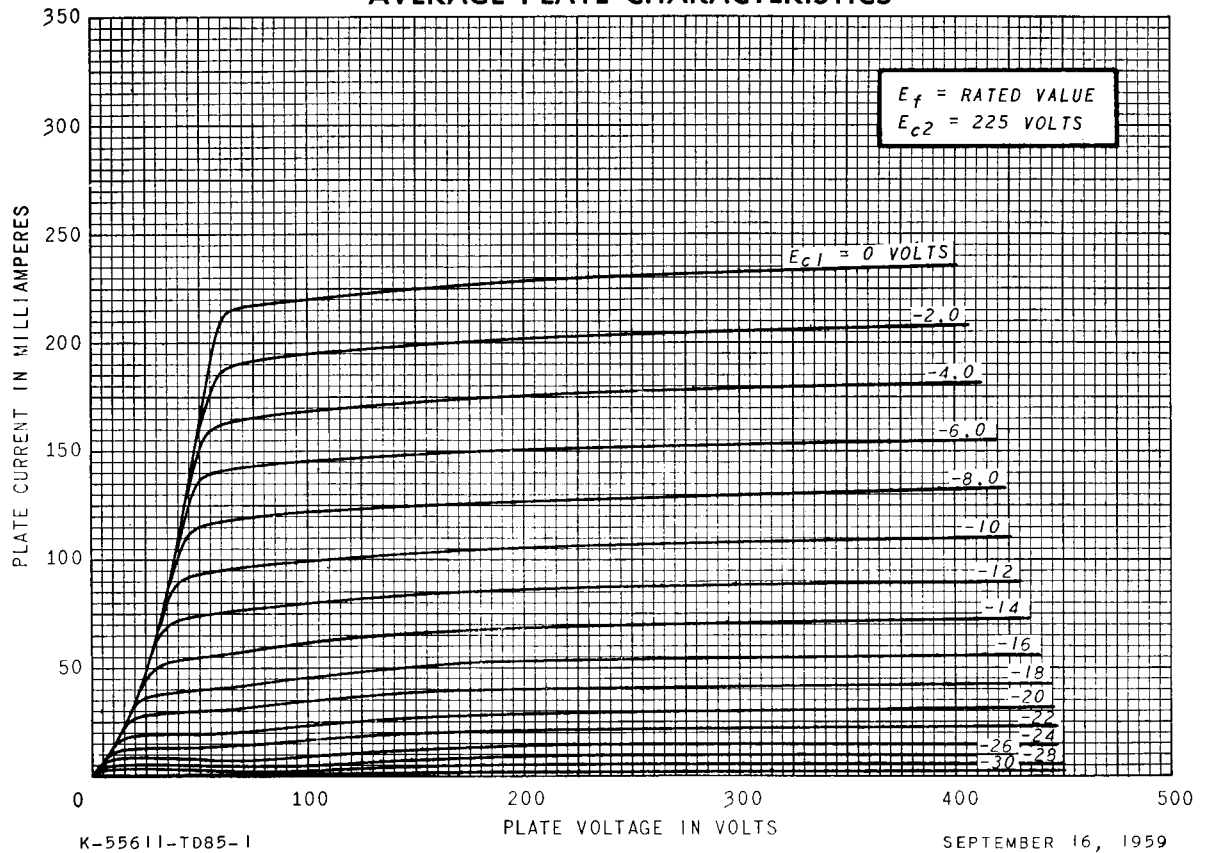


AVERAGE PLATE CHARACTERISTICS

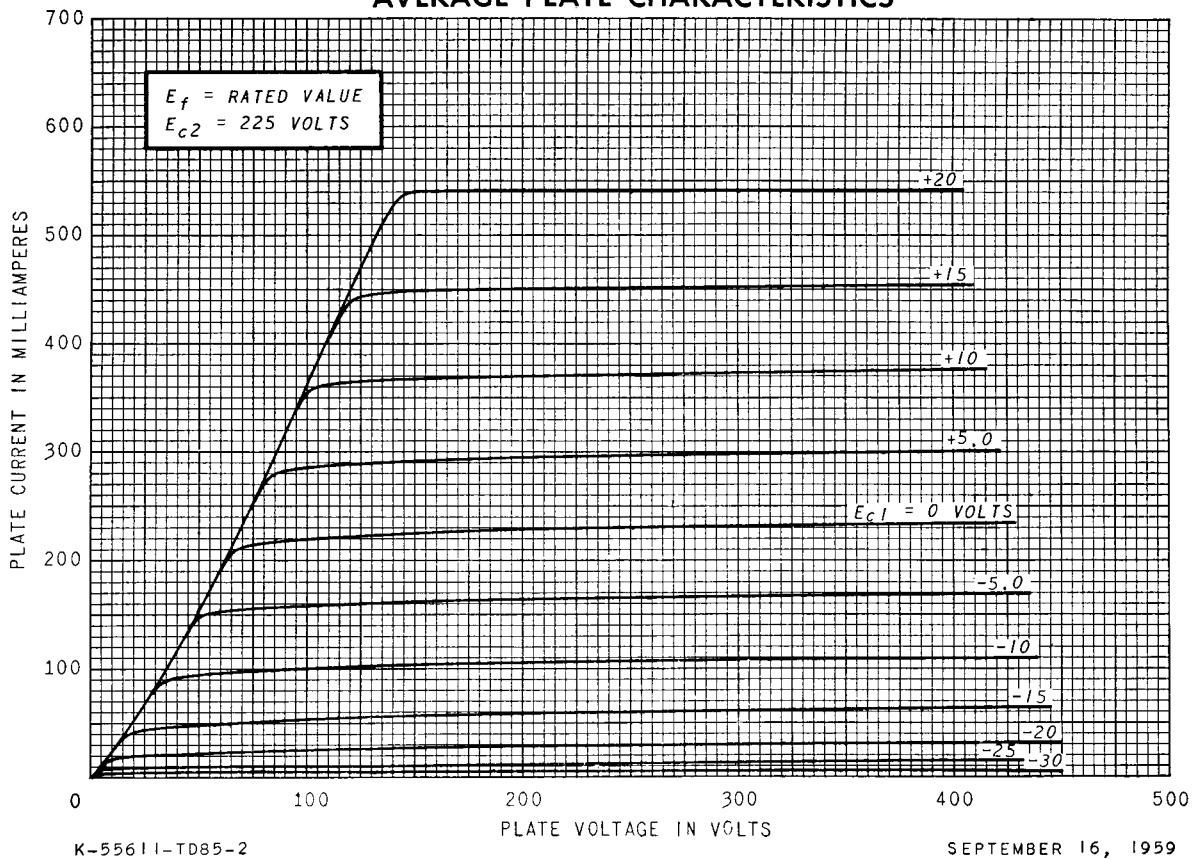


AVERAGE CHARACTERISTICS

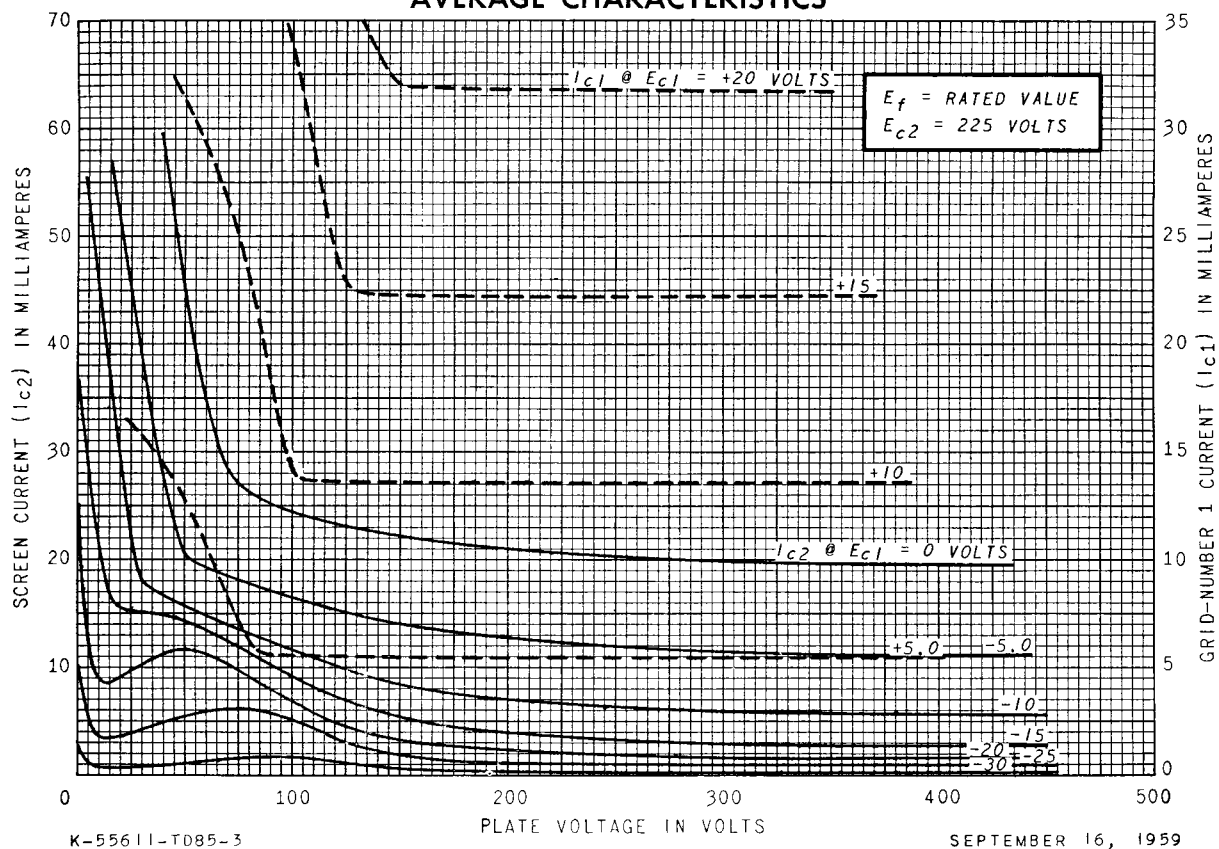


AVERAGE TRANSFER CHARACTERISTICS

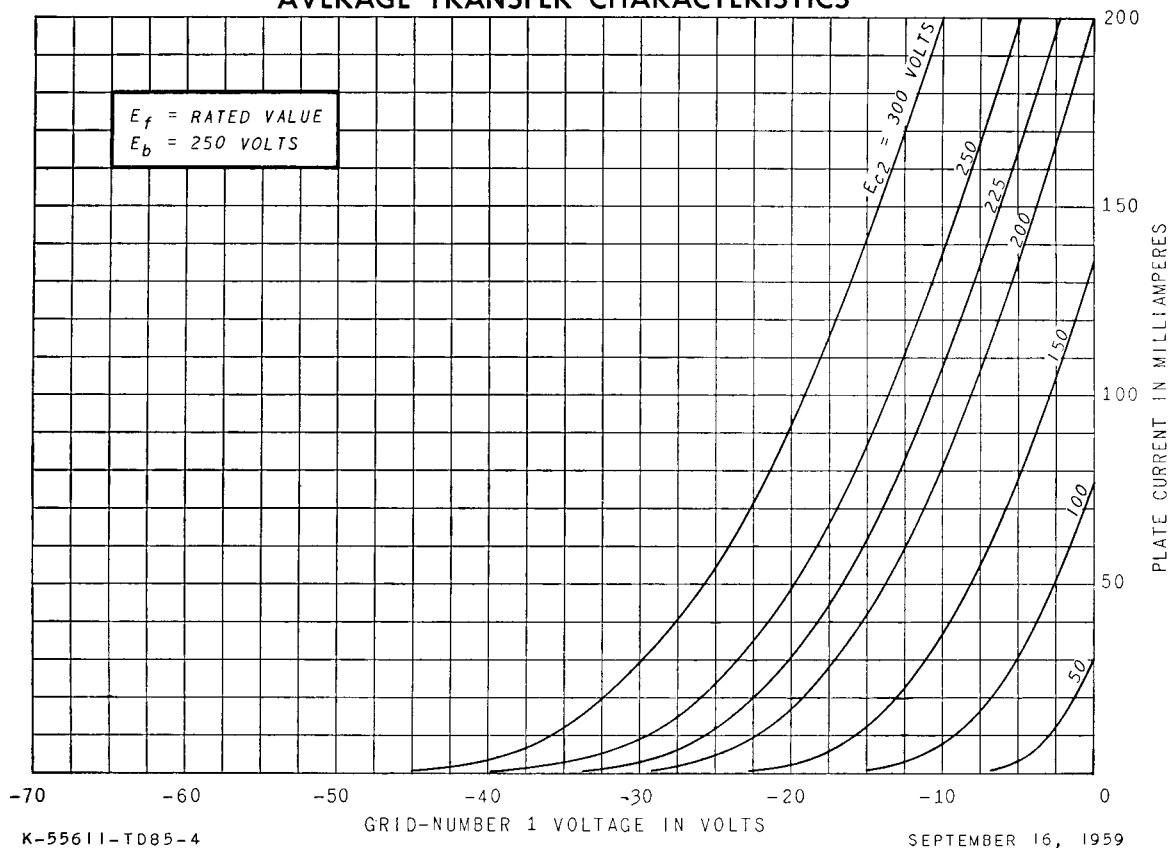


AVERAGE TRANSFER CHARACTERISTICS

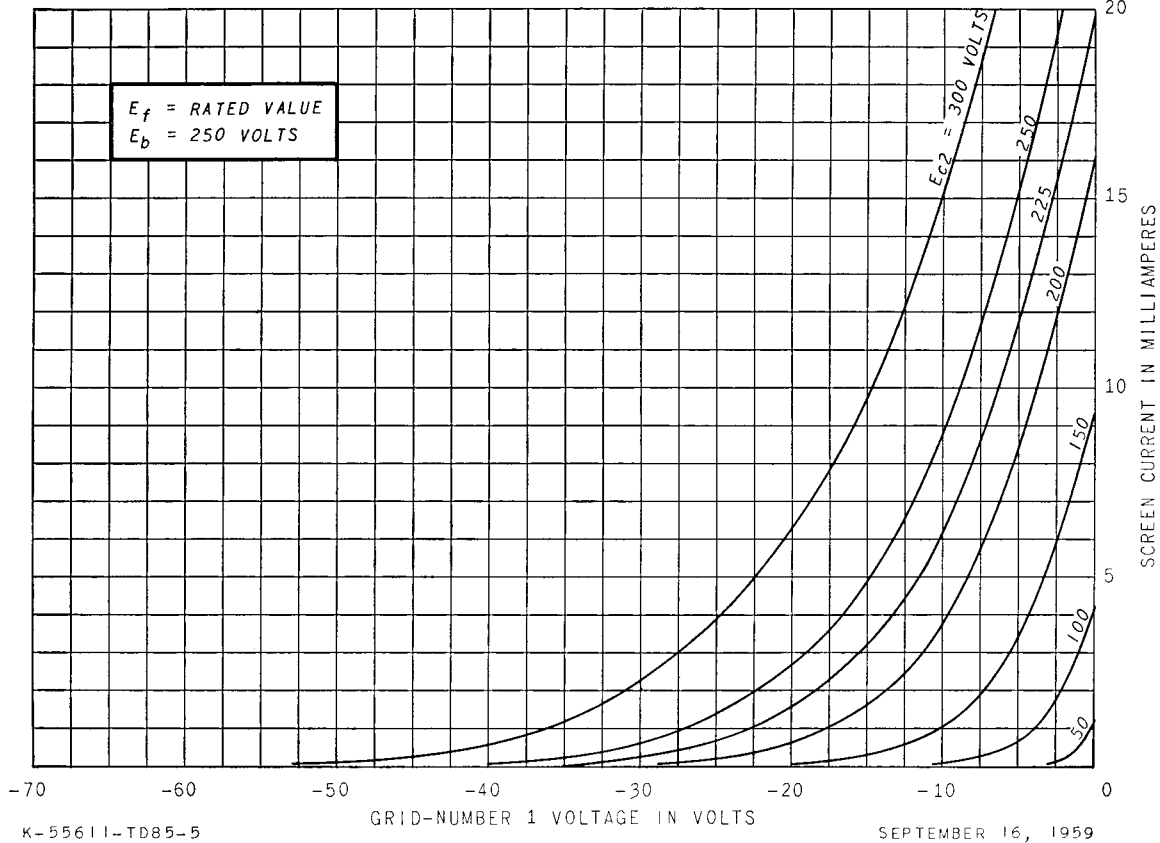

AVERAGE PLATE CHARACTERISTICS

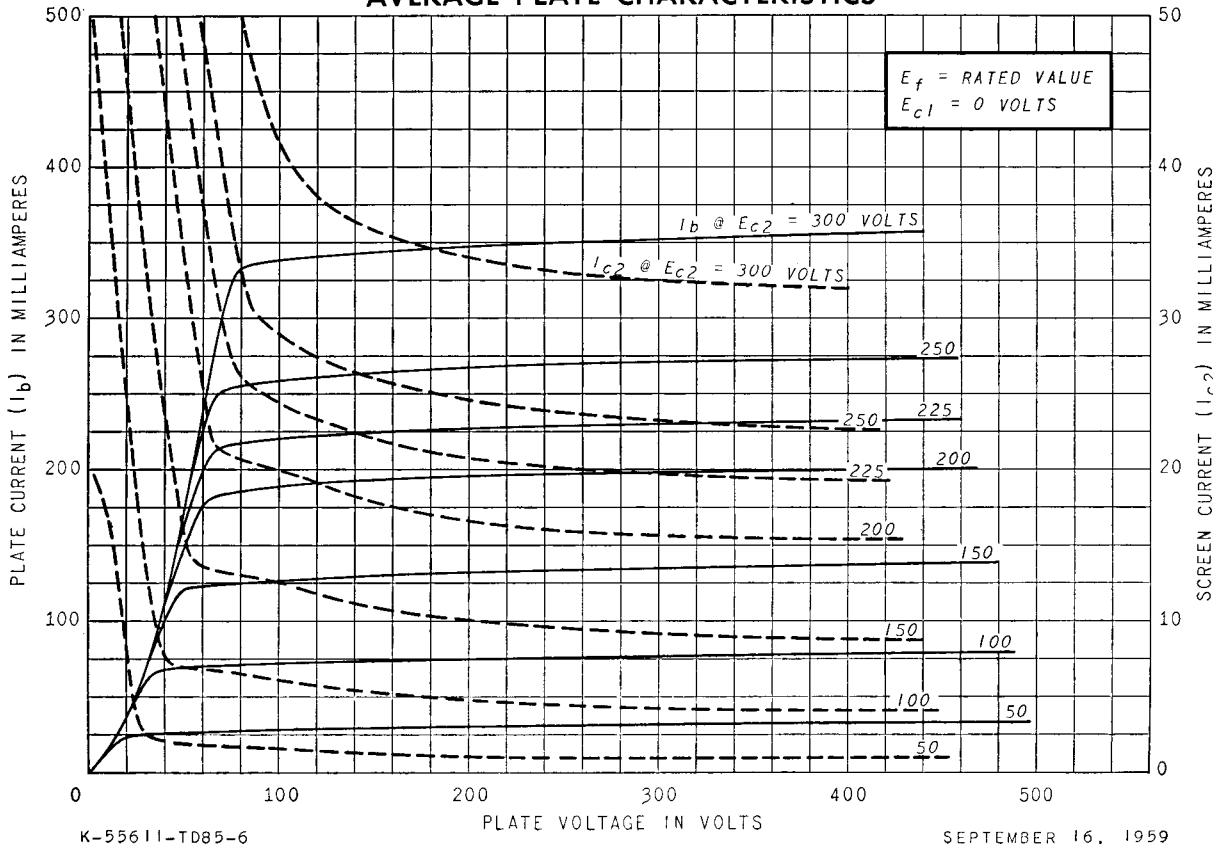


AVERAGE PLATE CHARACTERISTICS

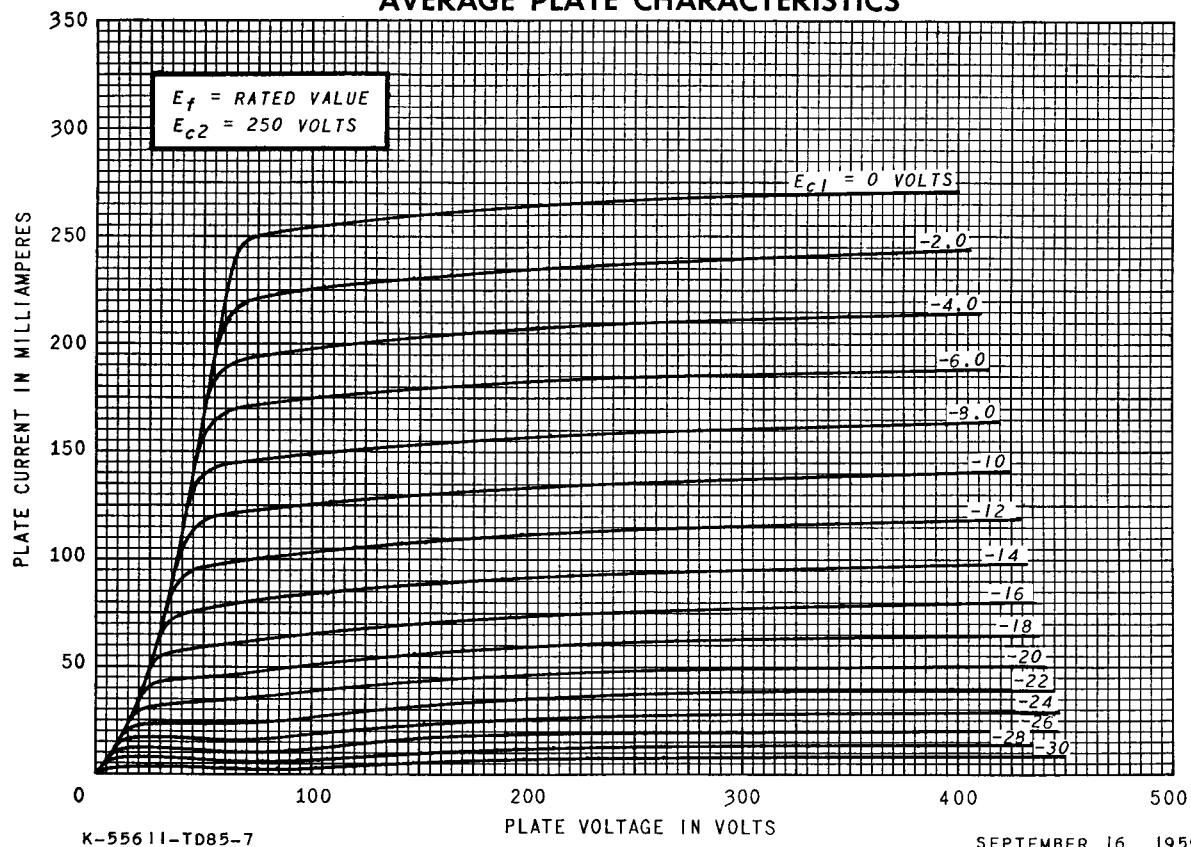


SEPTEMBER 16, 1959

AVERAGE PLATE CHARACTERISTICS

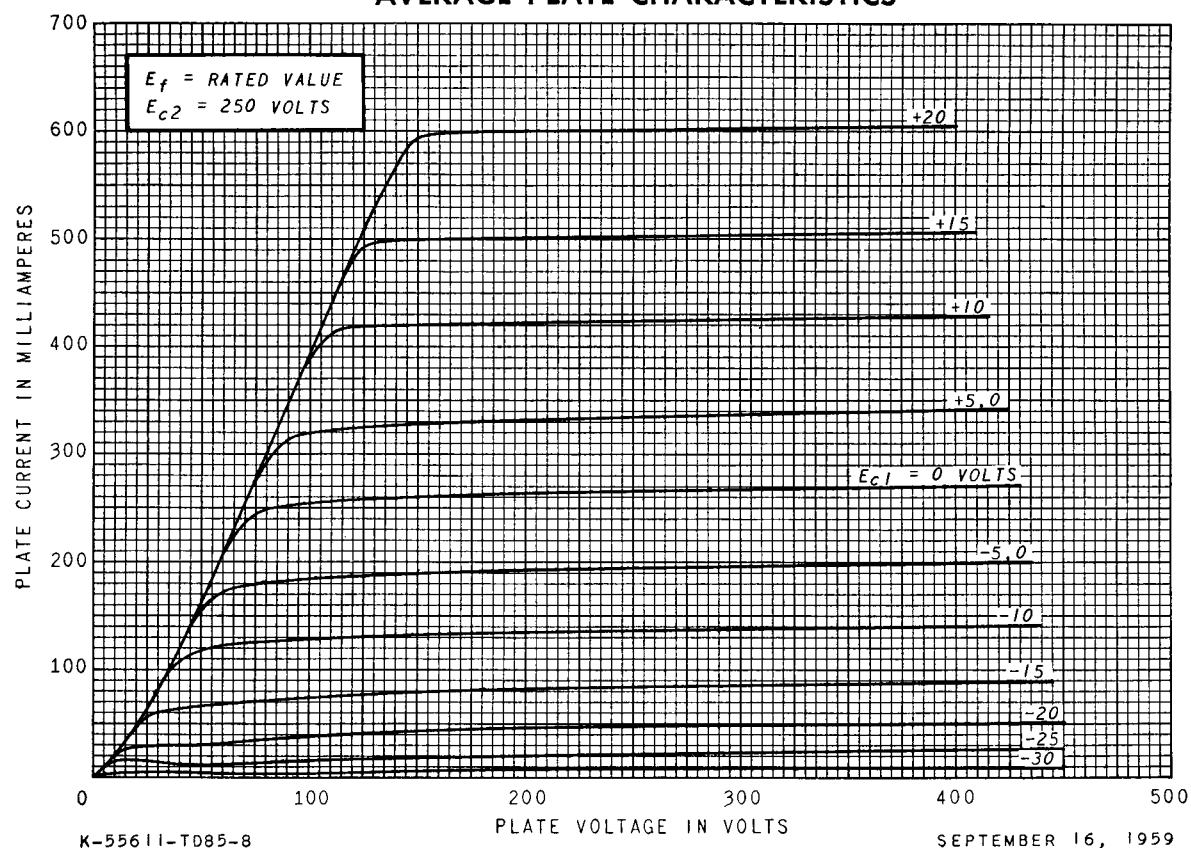

SEPTEMBER 16, 1959


AVERAGE CHARACTERISTICS

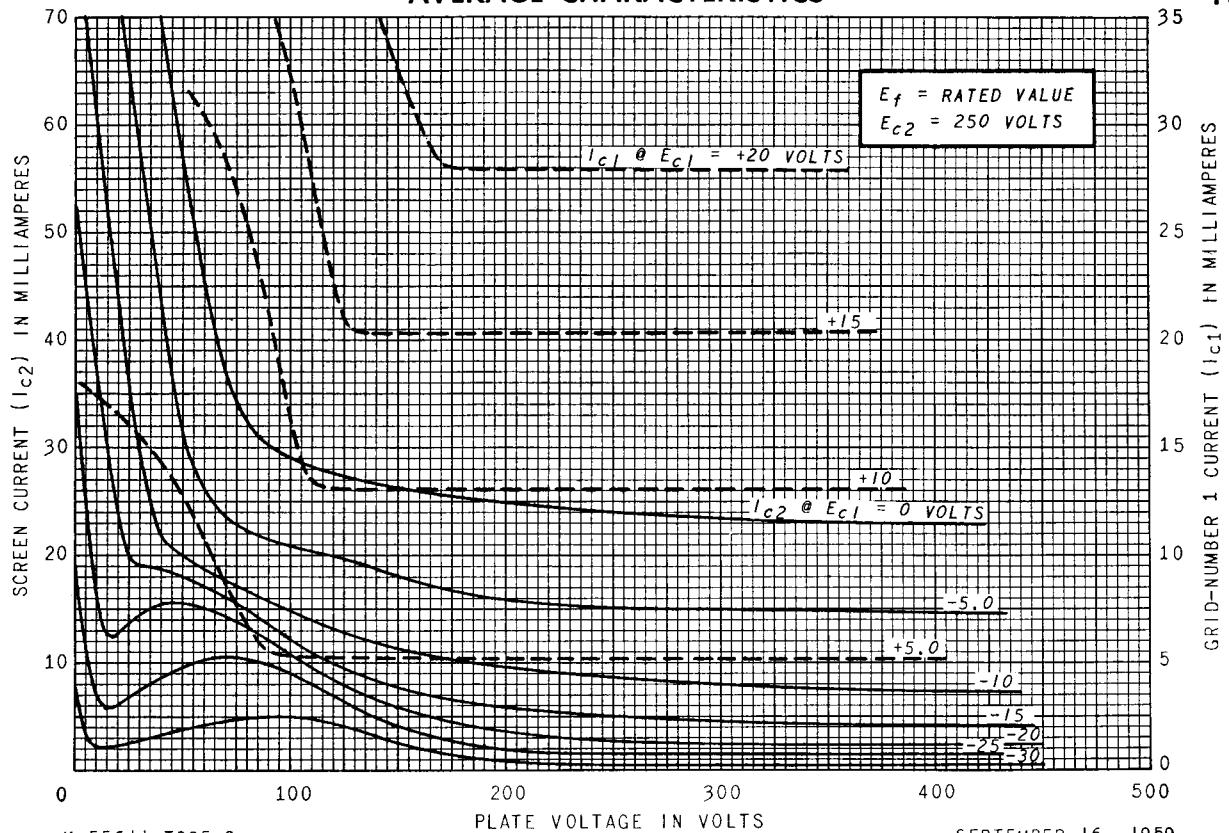

K-55611-TD85-9

SEPTEMBER 16, 1959


OPERATION CHARACTERISTICS

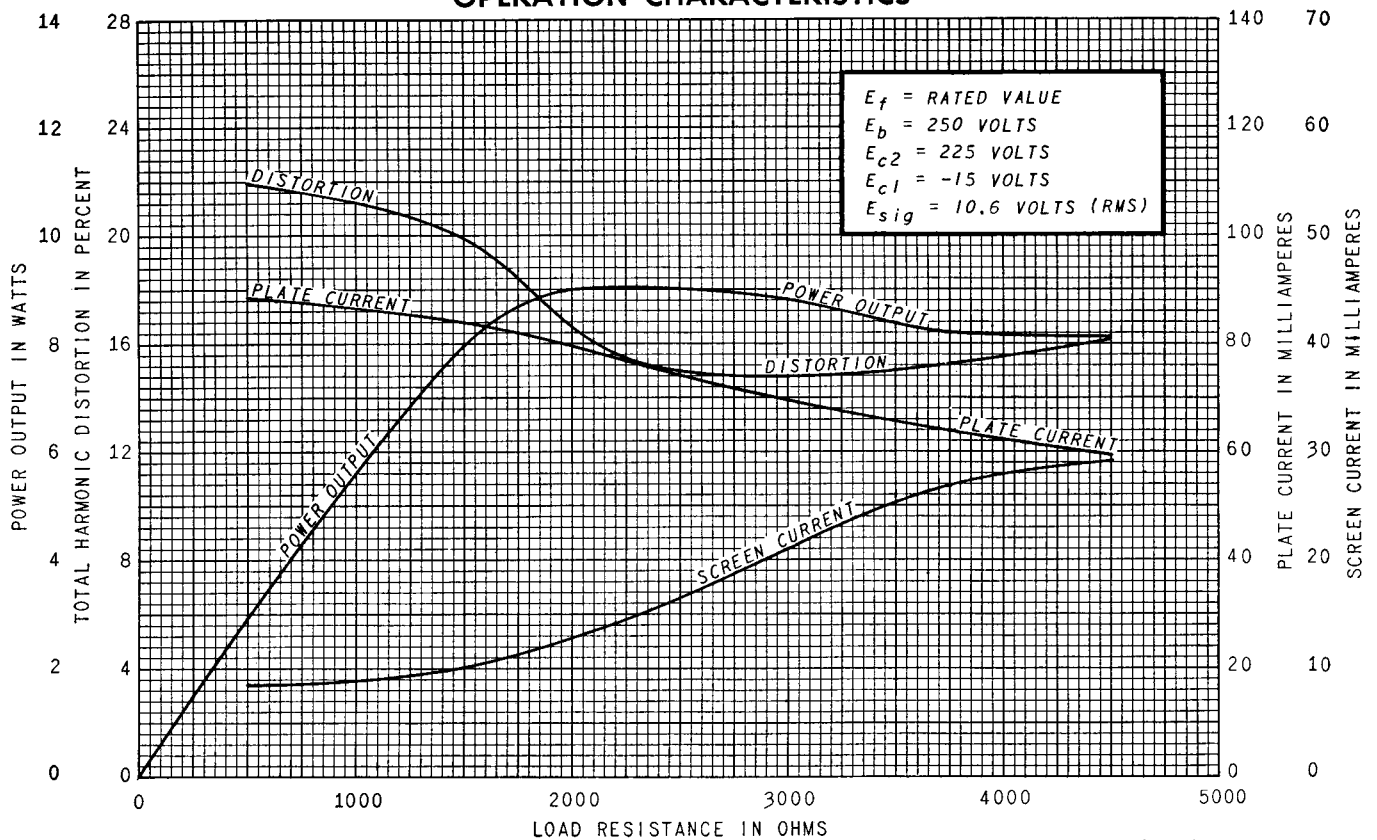


K-55611-TD85-10

SEPTEMBER 16, 1959

OPERATION CHARACTERISTICS

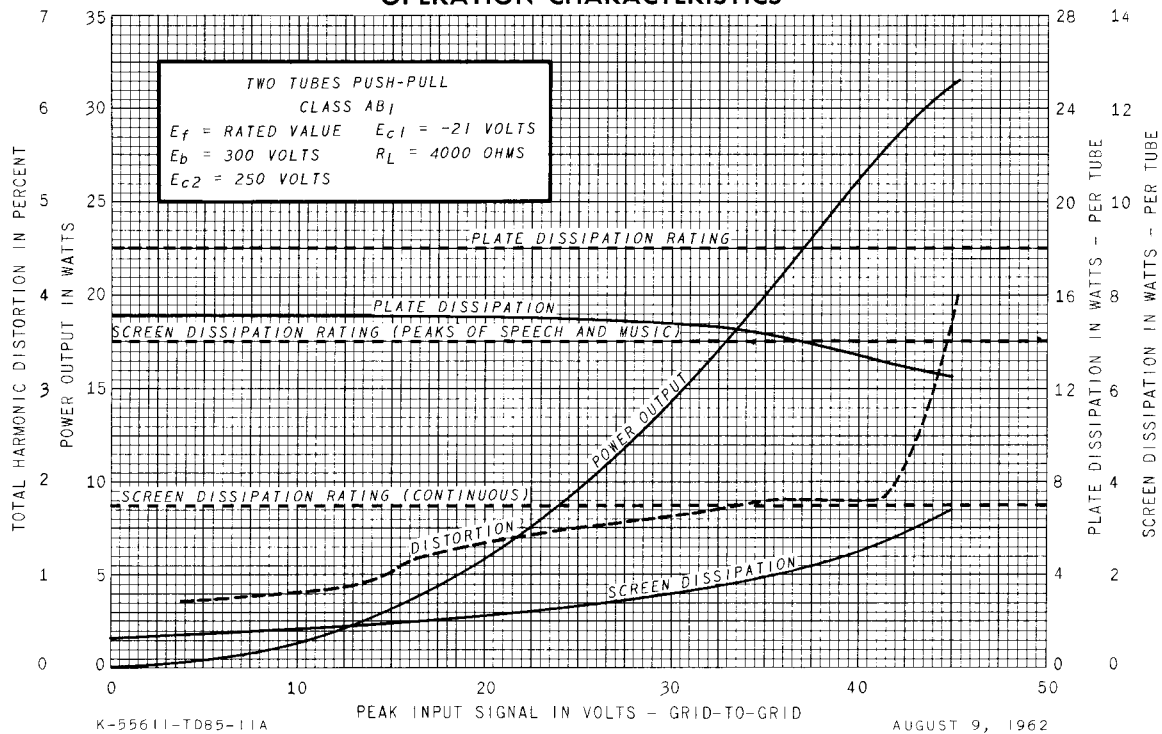

OPERATION CHARACTERISTICS

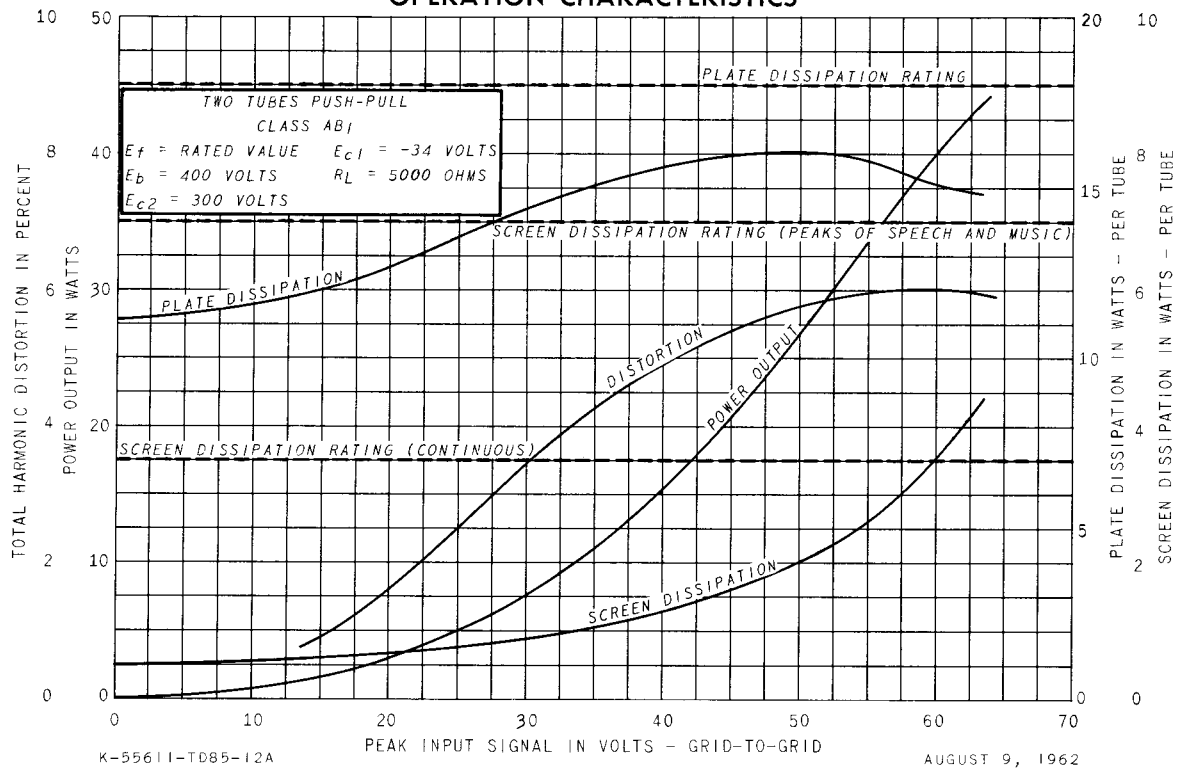

RECEIVING TUBE DEPARTMENT

GENERAL  **ELECTRIC**

Owensboro, Kentucky