from JEDEC release #3065,
Dec. 12, 1960
Electrically the same as 7390,
release #2520.

7390-A
HYDROGEN THYRATRON

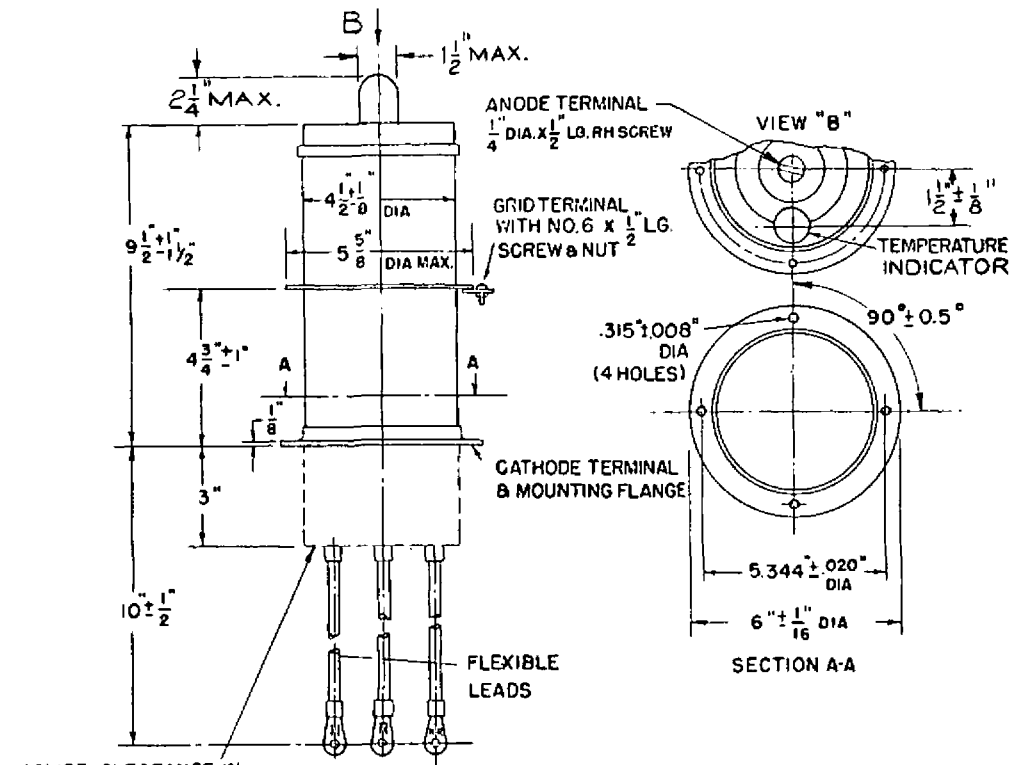

PRESSURE-TYPE LUGS (WITH INSULATING SLEEVES)

LEADS	LUG DESIGNATION	"G" INCHES	"W" INCHES	"A" INCHES	"X" INCHES	"T" INCHES
RESERVOIR	# 10	.187 TO .207	.395 MAX.	.200 MAX.	.275 MIN.	.060 MAX.
HEATER-RESERVOIR	¼"	.260 TO .313	.605 MAX.	.305 MAX.	.380 MIN.	.060 MAX.
HEATER	¼"	.260 TO .313	.605 MAX.	.305 MAX.	.380 MIN.	.060 MAX.

NOTE: THERE SHALL BE NO OBSTRUCTION WITHIN THE DISTANCE OF "X" FROM THE CENTER OF THE LUG SCREW HOLE.