


CONSTANT FIRING DIODE

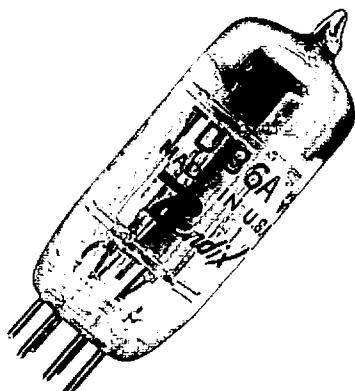

DESCRIPTION

The TD-36A is a miniature cold cathode inert gas filled diode. It is designed for use as a firing diode in RC timing circuits, energy transfer circuits and as a protective device. It is specifically designed for circuits in which a very stable breakdown voltage is required from -55°C to $+135^{\circ}\text{C}$ and for applications where the tube must operate with minimum deviation from initial characteristics after long periods of off time over the above temperature range. Its large, bare metal cathode is capable of supplying high peak currents under condenser discharge conditions and adequate average currents during steady state operations.

PHYSICAL CHARACTERISTICS

Base	Button: 7-pin miniature (E7-1)
Envelope	T-5 1/2 (5-2)
Overall length (Max.)	2 1/8"
Diameter (Max.)	3/4"
Seated Height (Max.)	1 7/8"
Mounting position	Any

ELECTRICAL RATINGS

Ionization Voltage E_z	133 Vdc, nom. (Note 1)
Ambient temperature	-55°C to $+135^{\circ}\text{C}$
Total ΔE_z over above temperature range	2 Vdc, max. (Note 2)
Life (Fig. 6)	10,000 pulses, min.
Life test end point: Total ΔE_z	2 Vdc, max.
Operating voltage, E_b , (at 20 mAdc)	95 Vdc, max. (Note 3)
$E_z - E_b$	43 Vdc, min. (Note 4)
Instantaneous peak i_k	100 ma, max.
Average cathode current	20 mAdc
Maximum temperature for extended storage	$+135^{\circ}\text{C}$
Vibration	10 g's
Note 1:	95% of the tubes break down between 130 Vdc and 135 Vdc. (see Figure 1)
Note 2:	A tube is tested 10 times at -55°C , at $+25^{\circ}\text{C}$, and at $+135^{\circ}\text{C}$. The total ΔE_z for all thirty readings is less than 2V. 95% of the tubes change less than 1.5 Vdc. (see Figure 3)
Note 3:	95% of the tubes have an operating voltage of 86 to 88 Vdc (see Figure 2)
Note 4:	95% of the tubes have a difference, $E_z - E_b$, of 43 to 51 Vdc (see Figure 4)

OPERATION

This tube was designed to operate continuously in a glow discharge. Consequently sufficient resistance must be inserted in series with the tube to limit the current passing through the tube to the rated values.

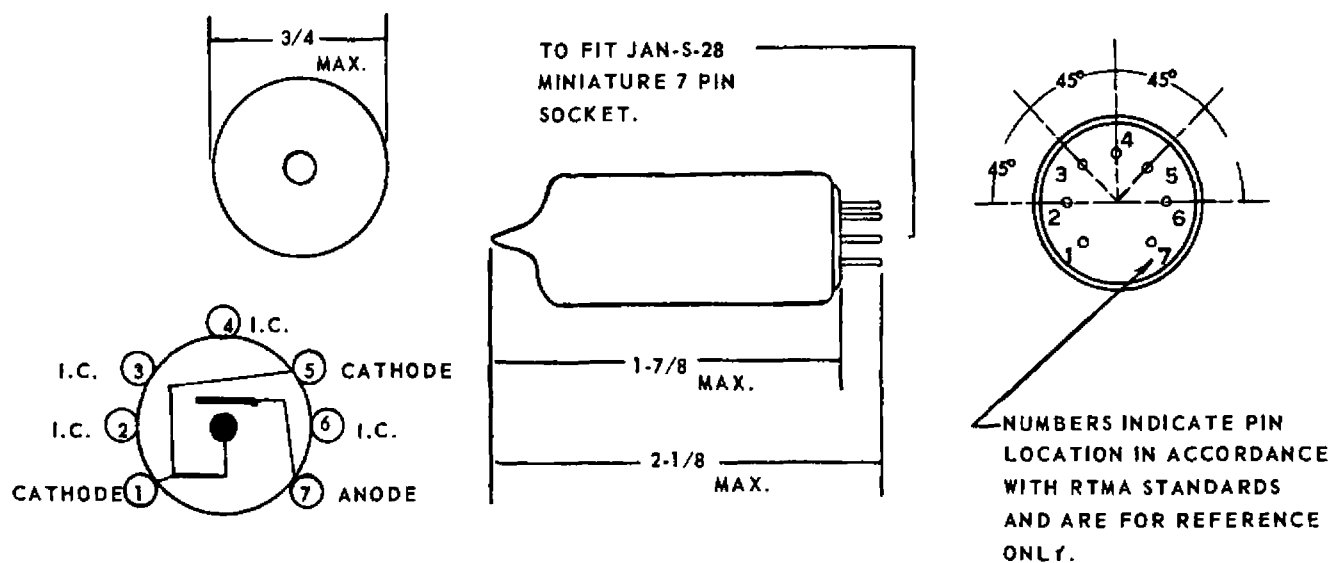


FIGURE 5
OUTLINE DRAWING OF CONSTANT FIRING DIODE, 7416/TD-36A

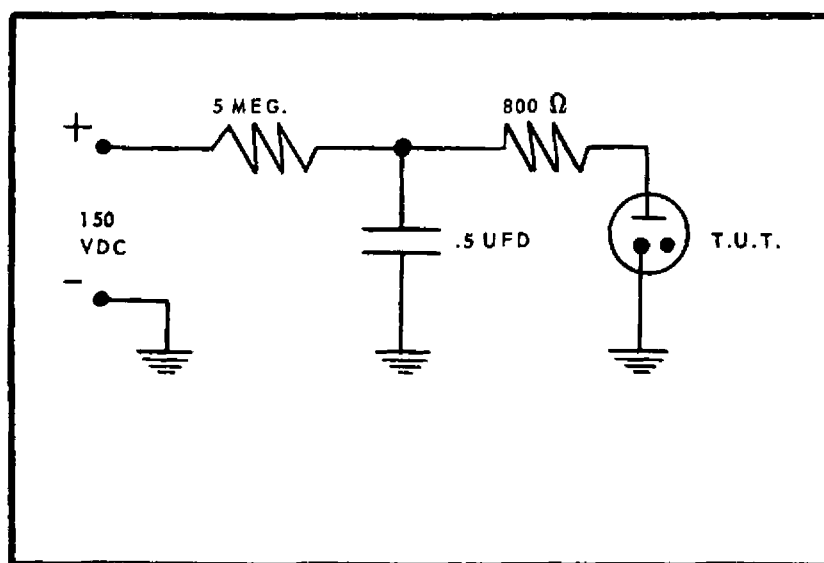


FIGURE 6
LIFE TEST CIRCUIT OF TD-36 A

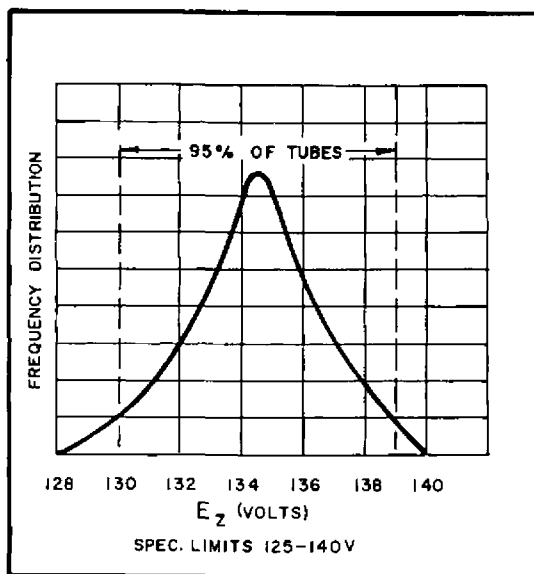


FIG. 1
TYPICAL DISTRIBUTION OF
IONIZATION VOLTAGES
OF PRODUCTION LOTS

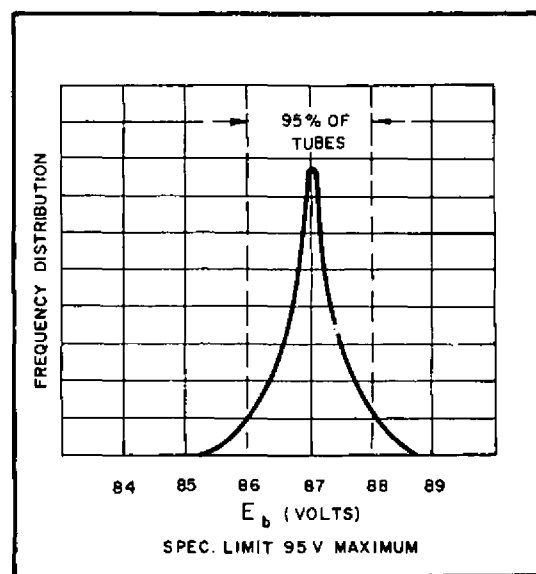


FIG. 2
TYPICAL DISTRIBUTION OF
OPERATING VOLTAGES
OF PRODUCTION LOTS

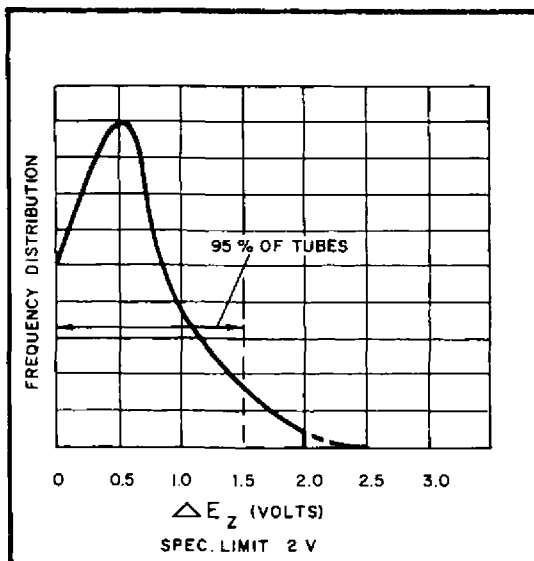


FIG. 3
TYPICAL DISTRIBUTION OF
CHANGE IN IONIZATION VOLTAGES
FROM -55°C TO +135°C
OF PRODUCTION LOTS

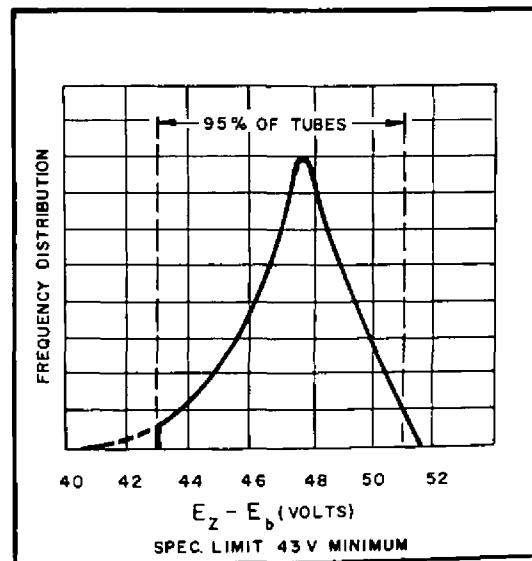


FIG. 4
TYPICAL DISTRIBUTION OF
THE DIFFERENCE BETWEEN
IONIZATION AND OPERATING VOLTAGES
OF PRODUCTION LOTS

Bendix makes a complete family of gas and special tubes: xenon and cold cathode thyratrons, gas diode voltage regulators, chronotrons, convecrons, spark gaps, etc...

For more information on any of these tubes - or information on our other electron tube products, contact:

Market Manager
Electron Tube Products
Red Bank Division
The Bendix Corporation
Eatontown, New Jersey

Or, contact any of our sales offices:

The Bendix Corporation
1730 "K" Street, N.W.
Washington 6, D.C.
FEderal 3-8200

The Bendix Corporation
6444 North Central Avenue
Chicago, Illinois
SPring 5-4636

The Bendix Corporation
Dallas, Texas
FLeetwood 1-5411

The Bendix Corporation
Bendix International Division
205 East 42nd Street
New York 17, New York

The Bendix Corporation
1900 Hulman Building
Dayton, Ohio
BAldwin 6-2341

The Bendix Corporation
117 East Providencia Avenue
Burbank, California
Vlctoria 9-3961

The Bendix Corporation
128 El Camino Real
San Carlos, California
LYtell 3-7845

Computing Devices of Canada, Ltd.
P.O. Box 508
Ottawa, Ontario, Canada