


TUNG-SOL

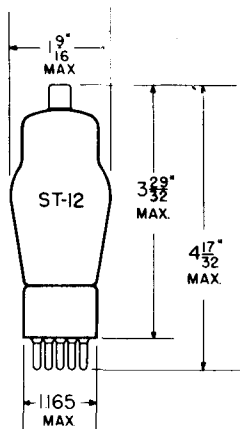

2A6, 75


SMALL METAL
CAPDUO-DIODE
HIGH-MU TRIODE AMPLIFIER

COATED UNIPOTENTIAL CATHODE


2A6	2.5 VOLTS	0.8 AMPERE
75	6.3 VOLTS	0.3 AMPERE
6B6G	6.3 VOLTS	0.3 AMPERE
AC OR DC		

GLASS BULB


ANY MOUNTING POSITION

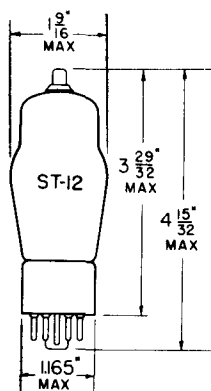

6B6G

SKIRTED MINIATURE
CAP

BOTTOM VIEW

SMALL
6-PIN BASE

BOTTOM VIEW

SMALL
7-PIN OCTAL BASE

THE 2A6, 6B6G AND 75 COMBINE TWO DIODES AND A HIGH-MU TRIODE IN A SINGLE BULB, USING A COMMON CATHODE. THEY ARE DESIGNED FOR USE AS DIODE DETECTORS, AVC RECTIFIERS AND RESISTANCE COUPLED AMPLIFIERS.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD M8-210

MAXIMUM PLATE VOLTAGE	250	VOLTS
MINIMUM DIODE CURRENT PER PLATE		
WITH 10 VOLTS DC APPLIED	0.8	MA.
MAXIMUM CATHODE VOLTAGE	100	VOLTS

CONTINUED ON NEXT PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE.

DIRECT INTERELECTRODE CAPACITANCES (APPROX.)

TRIODE UNIT

GRID TO PLATE	1.7	μmf
INPUT	1.7	μmf
OUTPUT	3.8	μmf

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A₁ AMPLIFIER

TRIODE UNIT

PLATE VOLTAGE	250	VOLTS
GRID VOLTAGE	-2.0	VOLTS
PLATE CURRENT	0.9	MA.
PLATE RESISTANCE	91 000	OHMS
TRANSCONDUCTANCE	1 100	μMHOS
AMPLIFICATION FACTOR	100	

RESISTANCE COUPLED AMPLIFIER

PLATE SUPPLY VOLTAGE	100	100	250	VOLTS
PLATE LOAD RESISTOR	0.25	0.25	0.25	MEGOHM
CATHODE RESISTOR	0.0	10 000	4 000	OHMS
GRID CIRCUIT RESISTOR	6.0	1.0	1.0	MEGOHMS
GRID COUPLING CONDENSER	0.01	0.05	0.05	μf
VOLTAGE GAIN	35	35	52	

