

Central ELECTRONIC

MANUFACTURERS

DENVILLE, NEW JERSEY

PULSE TUBE

7545/XD-45

3.4 MEGAWATTS

Description

The Central tube type 7545/XD-45 is a forced-air-cooled triode specifically designed for use in pulsed service as an amplifier and modulator switch tube.

Filament-thoriated tungsten

E_f 10V
 I_f 120A
 μ 30

Maximum Ratings:

Plate Voltage —	25000 volts dc for pulse application
Plate Voltage —	8000 volts dc for cw application
Cathode Current —	200 peak amperes
Plate Current —	6 amperes dc
Plate Dissipation	6 Kw forced air cooled
Power Input —	48 Kw for class C Telephony

Typical Operation

Pulsed RF power amplifier .03 duty class B

Plate Voltage	15000 volts dc
Grid Voltage	-600 volts dc
Peak RF Grid Voltage	2560 volts
D.C. Plate Current	0.573 amperes
Driving Power	461 watts
Pulse Power Output	390 Kw

Air Flow for 6 Kw 200 cfm @ 1" water back pressure


PULSED SWITCH TUBE 0.002 DUTY

E_f 10 Vdc	25000 volts dc
Plate Voltage	130 amperes
Peak Plate Current	70 amperes
Peak Grid Current	6 Kw forced air cooled
Average Plate Dissipation	25 μ seconds
Pulse Width	2.6 Mw
Peak Power Switched	

E_f 10.8 Vdc	25000 volts dc
Plate Voltage	180 amperes
Peak Plate Current	100 amperes
Peak Grid Current	6 Kw forced air cooled
Average Plate Dissipation	25 μ seconds
Pulse Width	
Peak Power Switched	

PULSED SWITCH TUBE 0.06 DUTY

E_f 10.8 Vdc	25000 Vdc
Plate Voltage	120 amperes
Peak Plate Current	65 amperes
Peak Grid Current	6 Kw forced air cooled
Average Plate Dissipation	3000 μ seconds
Pulse Width	

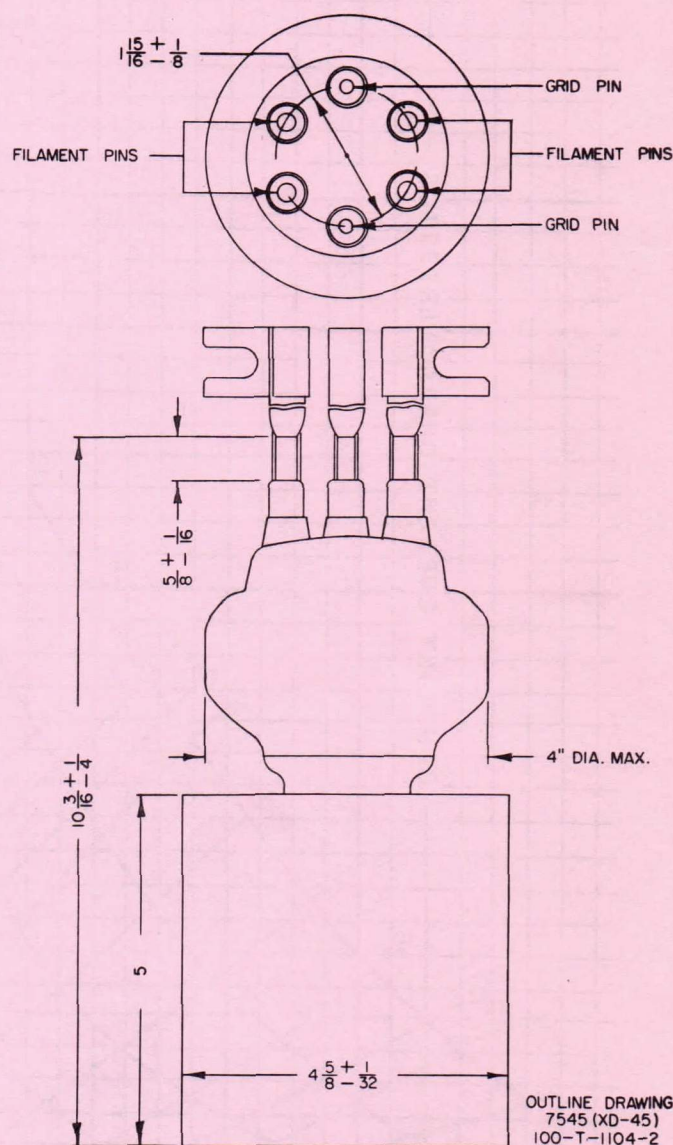

PROVISIONAL DATA
Issued 5/60
Check factory before
finalizing designs.

(Over)



