

POWER AMPLIFIER TRIODE TYPE 7565

The 7565 is a three electrode tube designed for use as a modulator or amplifier. The anode is capable of dissipating 4 kilowatts of power in Continuous Commercial Service. Cooling is accomplished by forced air. The cathode is a thoriated tungsten filament. Maximum ratings apply for audio frequencies.

ELECTRICAL:

	Min.	Bogey	Max.	
Filament Voltage.....	5.7	6.0	6.3	Volts
Filament Current.....	57	60	63	Amperes
Filament Starting Current.....	--	--	300	Amperes
Filament Resistance, (cold).....	--	.016	--	Ohms
Amplification Factor.....	--	6.0	--	
Direct Interelectrode Capacitances (Avg.):				
Grid-Plate.....			14	μmf
Grid-Filament.....			15	μmf
Plate-Filament.....			1.5	μmf

MECHANICAL:

Mounting Position	Vertical, Anode Up or Down		
Type of Cooling	Forced Air		
Maximum Incoming Air Temperature	45 °C		
Required Air Flow on Anode:			
Per Cent Plate Dissipation Rating	100	75	50
Air Flow-Cubic Feet per Minute	300	200	125
Static Pressure-Inches of Water.	2.5	1.25	0.7
Required Air Flow on Filament.	Air flow through radiator is normally sufficient		
Maximum Glass Temperature.	160 °C		
Net Weight, approximate	4-7/8 lbs.		
Shipping Weight, approximate	10 lbs.		

AUDIO FREQUENCY POWER AMPLIFIER AND MODULATOR-CLASS A

MAXIMUM RATINGS:

Absolute Maximum Values

DC Plate Voltage.....	8.0	max.	Kilovolts
Negative DC Grid Voltage.....	1000	max.	Volts
Plate Input.....	4.0	max.	Kilowatts
Plate Dissipation.....	4.0	max.	Kilowatts

TYPICAL OPERATING CHARACTERISTICS:

DC Plate Voltage.....	4500	Volts
DC Grid Voltage.....	-570	Volts
Peak AF Grid Voltage.....	570	Volts
Peak AF Plate Voltage.....	2700	Volts
DC Plate Current.....	0.88	Amperes
Load Resistance.....	4500	Ohms
2nd Harmonic Distortion (approx.).....	3.8	Per Cent
Power Output.....	950	Watts

AUDIO FREQUENCY POWER AMPLIFIER AND MODULATOR CLASS AB

MAXIMUM RATINGS (PER TUBE):


Absolute Maximum Values

DC Plate Voltage.....	8.0	max.	Kilovolts
DC Plate Current.....	2.5	max.	Amperes
Negative DC Grid Voltage.....	1500	max.	Volts
Plate Input.....	8.0	max.	Kilowatts
Plate Dissipation.....	4.0	max.	Kilowatts


TYPICAL OPERATING CHARACTERISTICS:

(Unless Otherwise Specified, Values are for Two Tubes)

DC Plate Voltage.....	7.0	Kilovolts
DC Grid Voltage.....	-1140	Volts
Peak AF Grid to Grid Voltage.....	2280	Volts
Zero Signal Plate Current.....	0.5	Amperes
Maximum Signal DC Plate Current.....	2.2	Amperes
Peak AF Plate to Plate Voltage.....	9.2	Kilovolts
Effective Load Resistance (Plate to Plate)...	5100	Ohms
Maximum Signal Driving Power.....	0	Watts
Maximum Signal Power Output.....	7.7	Kilowatts
Total Harmonic Distortion (Approx.).....	4.5	Per Cent

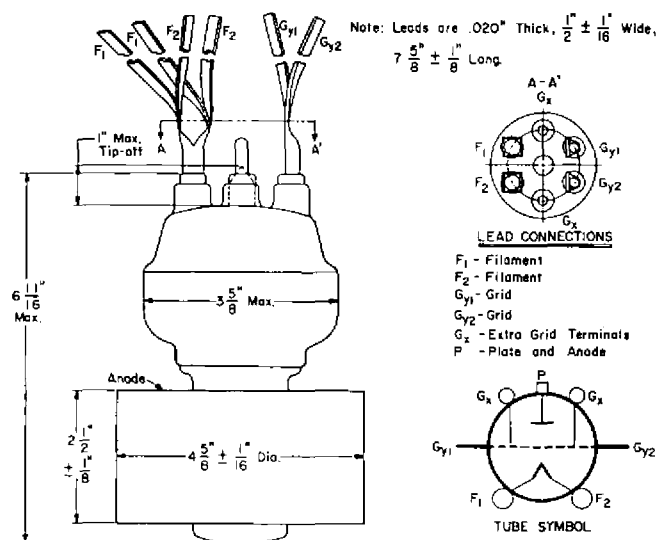

CE-41105

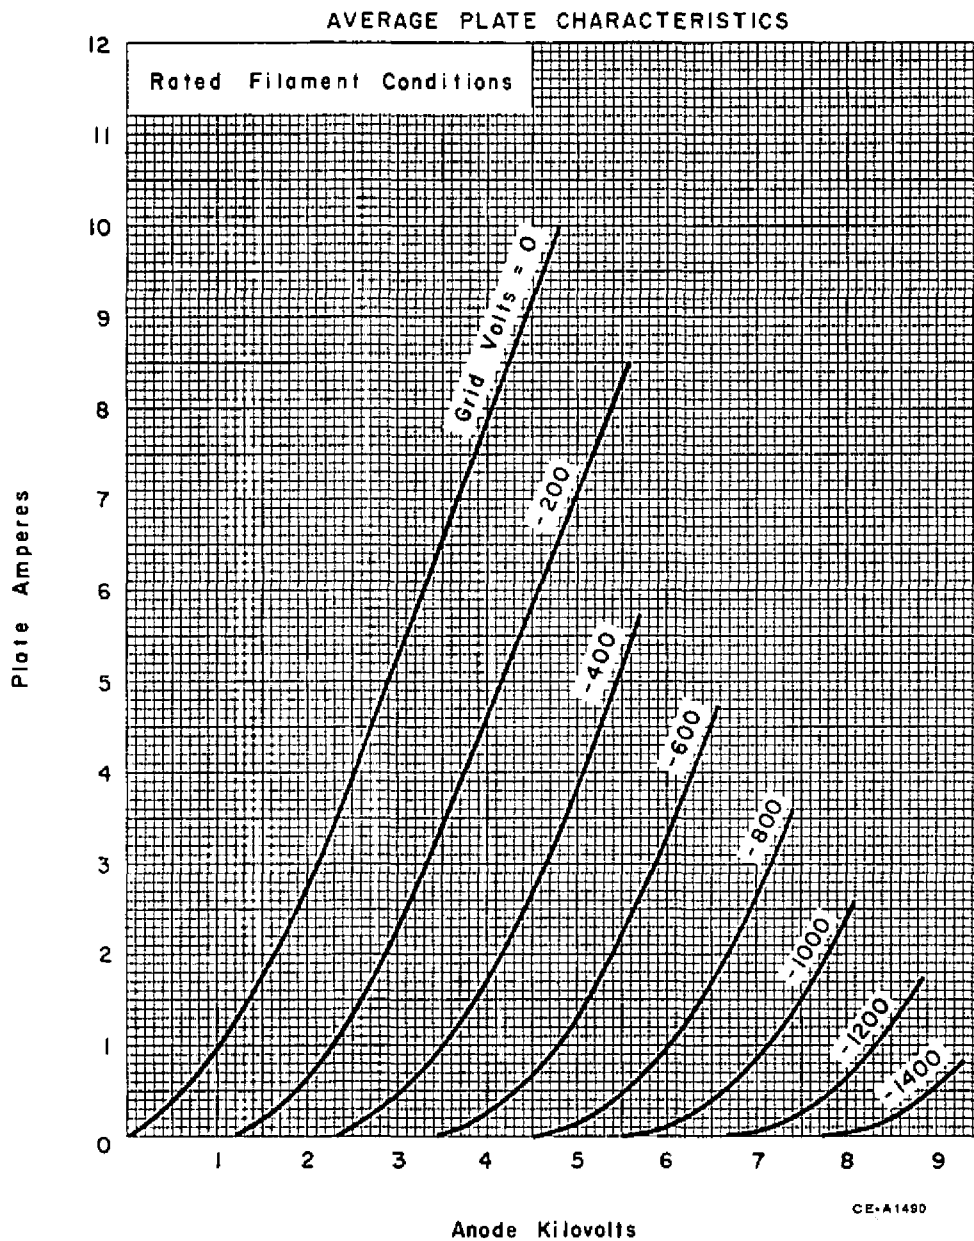

The information contained herein is supplied without assuming responsibility for infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Westinghouse Electric Corporation.

WESTINGHOUSE ELECTRIC CORPORATION, ELECTRONIC TUBE DIVISION, ELMIRA, NEW YORK