


TUNG-SOL

PENTODE



GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

6.3 VOLTS 450 MA.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

LOCK-IN 8 PIN BASE

THE 7W7 IS A CATHODE TYPE SHARP CUT-OFF PENTODE VOLTAGE AMPLIFIER IN THE LOCK-IN CONSTRUCTION. IT IS CHARACTERIZED BY HIGH TRANSCONDUCTANCE AND LOW GRID-TO-PLATE CAPACITANCE WHICH MAKE IT USEFUL IN HIGH GAIN NARROW BAND AMPLIFIER SERVICE.

DIRECT INTERELECTRODE CAPACITANCES

WITH EXTERNAL SHIELD CONNECTED TO CATHODE

GRID TO PLATE: (G TO P) MAX.	0.0025	μ mf
INPUT: G_1 TO (H+K+ G_2 + G_3)	9.5	μ mf
OUTPUT: P TO (H+K+ G_2 + G_3)	7.0	μ mf

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD M8-220

HEATER VOLTAGE	6.3	VOLTS
MAXIMUM HEATER-CATHODE VOLTAGE	90	VOLTS
MAXIMUM PLATE VOLTAGE	300	VOLTS
MAXIMUM GRID #2 VOLTAGE	150	VOLTS
MAXIMUM PLATE DISSIPATION	4	WATTS
MAXIMUM GRID #2 DISSIPATION	0.8	WATT

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A_1 AMPLIFIER

	WITH FIXED SCREEN SUPPLY	WITH SERIES SCREEN RESISTOR	
HEATER VOLTAGE	6.3	6.3	VOLTS
HEATER CURRENT	450	450	MA.
PLATE VOLTAGE	300	300	VOLTS
GRID #3 VOLTAGE	PIN #5 CONNECTED TO PIN #4 AT SOCKET		
GRID #2 VOLTAGE	150	---	VOLTS
GRID #2 SUPPLY VOLTAGE ^A	---	300	VOLTS
GRID #2 SERIES RESISTOR	---	40 000	OHMS
CATHODE BIAS RESISTOR	160	160	OHMS
PLATE RESISTANCE (APPROX.)	0.3	0.3	MEG OHM
TRANSCONDUCTANCE	5 800	5 800	μ MHOS
PLATE CURRENT	10	10	MA.
GRID #2 CURRENT	3.9	3.9	MA.
GRID #1 VOLTAGE (APPROX.) FOR $I_b = 10 \mu$ A.	-8	-16	VOLTS

^A WHEN A SCREEN SUPPLY VOLTAGE IN EXCESS OF 150 VOLTS IS USED, A SERIES SCREEN DROPPING RESISTOR MUST BE EMPLOYED TO LIMIT SCREEN VOLTAGE TO 150 VOLTS WITH PLATE CURRENT AT RATED VALUE OF 10 MA.

7W7


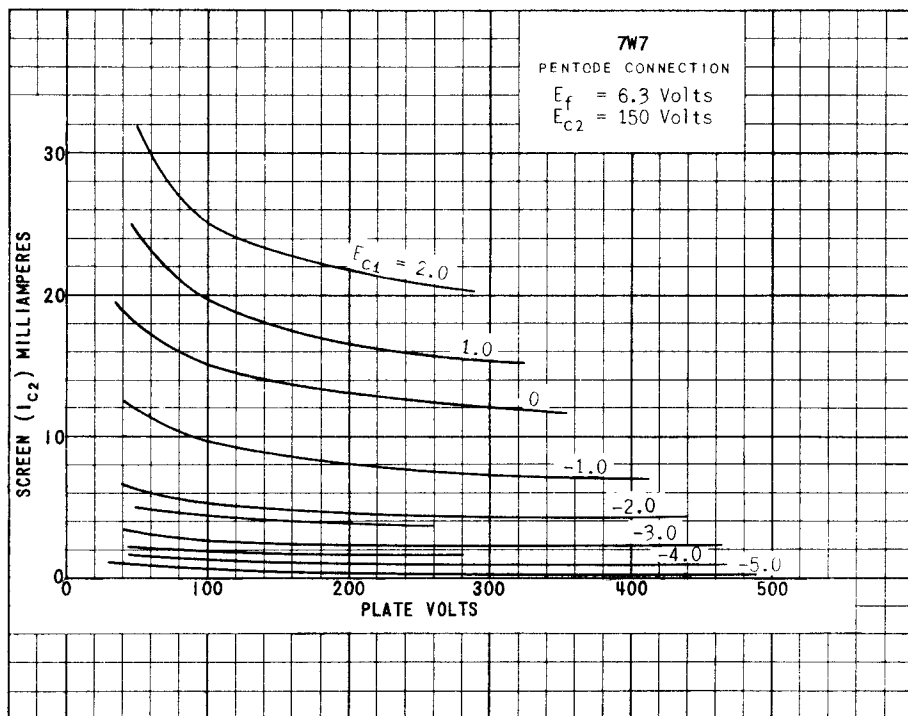


PLATE
2058
AUG. 2,
1948

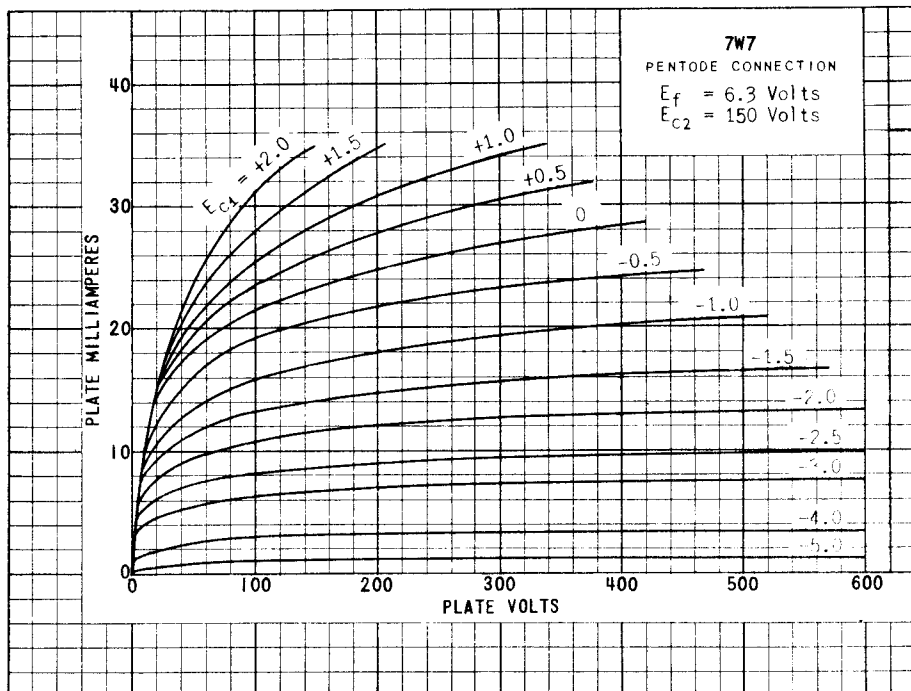