

Beam Power Tube

LESS THAN 1-SECOND WARM-UP
FOR USE IN LOW-VOLTAGE MOBILE
EQUIPMENT UP TO 500 Mc

COAXIAL-ELECTRODE STRUCTURE
CERAMIC-METAL SEALS
CONDUCTION COOLED

For Use as an RF Power Amplifier, Oscillator, Regulator, Distributed Amplifier, or Linear RF Power Amplifier in Mobile or Stationary Equipment

Electrical:

Filamentary Cathode, Woven-Wire-

Mesh Type, Oxide-Coated:

Voltage (AC or DC) 2.9 volts

Current at 2.9 volts 4.6 amp

Minimum heating time less than 1^a sec

Mu-Factor, Grid No.2 to Grid No.1

for plate volts = 250, grid-No.2

volts = 200, and plate amperes = 1.2 11

Direct Interelectrode Capacitances:^b

Grid No.1 to plate 0.13 max. pf

Grid No.1 to cathode 16 pf

Plate to cathode 0.03 max. pf

Grid No.1 to grid No.2 22 pf

Grid No.2 to plate 7 pf

Grid No.2 to cathode 3 pf

Mechanical:

Operating Position Any

Maximum Overall Length 2.26"

Seated Length 1.920" $\pm$ 0.065"

Diameter 1.426" $\pm$ 0.010"

Weight (Approx.) 2 oz

Socket E. F. Johnson Co.^c No.124-311-100,

Mycalex^d No.CP464-2, or equivalent

Grid-No.2 Bypass Capacitor . E. F. Johnson Co.^c No.124-113-1,

or equivalent

Base Large-Wafer Elevenar 11-Pin with Ring

(JEDEC No.E11-81)

Terminal Connections (See Dimensional Outline):

BOTTOM VIEW

Pin 1 - Filament-Cathode

Pin 2 - Grid No.2

Pin 3 - Grid No.1

Pin 4 - Same as Pin 1

Pin 5 - No Internal Connection

Pin 6 - No Internal Connection

Pin 7 - Grid No.2

Pin 8 - Grid No.1

Pin 9 - Same as Pin 1

Pin 10 - Grid No.2

Pin 11 - Filament


Cap - Plate-Terminal Connection

Cylinder - Plate-Terminal

Contact Surface

Ring^e - Grid No.2 Terminal

Contact Surface



Thermal:

Terminal Temperature

(All Terminals) 250 max. °C

Plate Core Temperature (See

Dimensional Outline) 250 max. °C

Cooling, Conduction:

The plate terminal must be thermally coupled to a constant temperature device (heat sink—solid or liquid) to limit the plate terminal temperature to the specified maximum value of 250° C. The grid-No.2, grid-No.1, and filament terminals may also require coupling to the heat sink to limit their respective terminal temperature to the specified maximum value of 250° C.

LINEAR RF POWER AMPLIFIER**Single-Sideband Suppressed-Carrier Service**

Peak envelope conditions for a signal having a minimum peak-to-average power ratio of 2

Maximum CCS Ratings, Absolute-Maximum Values:*Up to 500 Mc*

DC Plate Voltage.	2200 max.	volts
DC Grid-No.2 Voltage.	400 max.	volts
DC Grid-No.1 Voltage.	-100 max.	volts
DC Plate Current at Peak of Envelope	450 ^f max.	ma
DC Grid-No.1 Current.	100 max.	ma
Plate Dissipation	100 ^g max.	watts
Grid No.2 Input	8 max.	watts

Typical CCS Operation with "Two-Tone Modulation":*At 30 Mc*

DC Plate Voltage.	700	volts
DC Grid-No.2 Voltage ^h	250	volts
DC Grid-No.1 Voltage ^h	-20	volts
Zero-Signal DC Plate Current.	100	ma
Effective RF Load Resistance.	1420	ohms
DC Plate Current at Peak of Envelope	205	ma
Average DC Plate Current.	150	ma
DC Grid-No.2 Current at Peak of Envelope.	16	ma
Average DC Grid-No.2 Current.	10	ma
Average DC Grid-No.1 Current.	1.0 ^j	ma
Peak-Envelope Driver Power Output (Approx.) ^k	0.3	watt
Output-Circuit Efficiency (Approx.)	95	%
Distortion Products Level: ^m		
Third order	30	db
Fifth order	35	db
Useful Power Output (Approx.):		
Average	40 ⁿ	watts
Peak envelope	80 ⁿ	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance

Under Any Condition:

With fixed bias. 25000 max. ohms

With fixed bias (In Class AB₁ operation) 100000 max. ohms

With cathode bias. Not recommended

Grid-No.2 Circuit Impedance. 10000 ohms

Plate Circuit Impedance. P

**RF POWER AMPLIFIER & OSCILLATOR — Class C Telegraphy
and****RF POWER AMPLIFIER — Class C FM Telephony****Maximum CCS Ratings, Absolute-Maximum Values:***Up to 500 Mc*

DC Plate Voltage.	2200 max.	volts
DC Grid-No.2 Voltage.	400 max.	volts
DC Grid-No.1 Voltage.	-100 max.	volts
DC Plate Current.	300 max.	ma
DC Grid-No.1 Current.	100 max.	ma
Grid-No.2 Input	8 max.	watts
Plate Dissipation	100 ^g max.	watts

Typical CCS Operation:*In Grid-Drive Circuit at 50 Mc*

DC Plate Voltage.	500	700	volts
DC Grid-No.2 Voltage.	160	175	volts
DC Grid-No.1 Voltage.	-10	-10	volts
DC Plate Current.	300	300	ma
DC Grid-No.2 Current.	25	25	ma
DC Grid-No.1 Current.	50	50	ma
Driver Power Output (Approx.) ^q	1.2	1.2	watts
Useful Power Output	85 ⁿ	110 ⁿ	watts

In Grid-Drive Circuit at 175 Mc

DC Plate Voltage.	500	700	volts
DC Grid-No.2 Voltage.	200	200	volts
DC Grid-No.1 Voltage.	-30	-30	volts
DC Plate Current.	300	300	ma
DC Grid-No.2 Current.	30	20	ma
DC Grid-No.1 Current.	40	40	ma
Driver Power Output (Approx.) ^q	3	3	watts
Useful Power Output	70 ⁿ	105 ⁿ	watts

In Grid-Drive Circuit at 470 Mc

DC Plate Voltage.	700	volts
DC Grid-No.2 Voltage.	200	volts
DC Grid-No.1 Voltage.	-30	volts
DC Plate Current.	300	ma
DC Grid-No.2 Current.	10	ma
DC Grid-No.1 Current.	20	ma



In Grid-Drive Circuit at 470 Mc

Driver Power Output (Approx.)^q 5 watts
 Useful Power Output 85ⁿ watts

Maximum Circuit Values:**Grid-No.1-Circuit Resistance**

Under Any Condition:

With fixed bias 25000 max. ohms

Grid-No.2 Circuit Impedance 10000 max. ohms

Plate Circuit Impedance ^p

^a The heating time required for adequate cathode emission is a function of the filament voltage and the impedance of the filament-voltage supply. It may be drastically reduced by employing a suitably designed overvoltage control circuit.

^b Measured with special shield adapter.

^c E.F. Johnson Co., 1921 10th Ave. S.W., Waseka, Minnesota.

^d Mycalex Corp. of America, 125 Clifton Blvd. Clifton, N.J.

^e For use at higher frequencies.

^f The maximum rating for a signal having a minimum peak-to-average power ratio less than 2, such as is obtained in "Single-Tone" operation, is 300 ma. During short periods of circuit adjustment under "Single-Tone" conditions, the average plate current may be as high as 450 ma.

^g Maximum plate dissipation is limited by the maximum plate core temperature and the cooling system to maintain tube operation below the specified maximum plate core temperature. With simple low-cost cooling techniques, maximum plate dissipation may be only about 100 watts; with more sophisticated cooling techniques, maximum plate dissipation may be as high as 300 watts.

^h Obtained preferably from a separate well-regulated source.

^j This value represents the approximate grid-No.1 current obtained due to initial electron velocities and contact-potential effects when grid-No.1 is driven to zero volts at maximum signal.

^k Driver power output represents circuit losses and is the actual power measured at input to grid-No.1 circuit. The actual power required depends on the operating frequency and the circuit used. The tube driving power is approximately zero watts.

^m Referenced to either of the two tones, and without the use of feedback to enhance linearity.

ⁿ This value of useful power is measured at load of output circuit.

^p The tube should see an effective plate supply impedance which limits the peak-current through the tube under surge conditions to 15 amperes.

^q Driver power output includes circuit losses and is the actual power measured at the input to the grid circuit. It will vary depending upon the frequency of operation and the circuit used.


CHARACTERISTICS RANGE VALUES

	Note	Min.	Max.	
1. Filament Current.	1	3.6	5.6	amp
2. Direct Interelectrode Capacitances:				
Grid No.1 to plate.	2	-	0.13	pf
Grid No.1 to cathode.	2	14	18.5	pf
Plate to cathode.	2	-	0.03	pf
Grid No.1 to grid No.2.	2	18	24	pf
Grid No.2 to plate.	2	5.7	8.0	pf
Grid No.2 to cathode.	2	2.0	4.0	pf
3. Grid-No.1 Voltage	1,3	-6	-24	volts
4. Grid-No.2 Current	1,3	-7	+8	ma

Note 1: With 2.9 volts (AC or DC) on filament.

Note 2: Measured with special shield adapter.

Note 3: With dc plate voltage of 700 volts, dc grid-No.2 voltage of 250 volts, and dc grid-No.1 voltage adjusted to give a dc plate current of 185 ma.

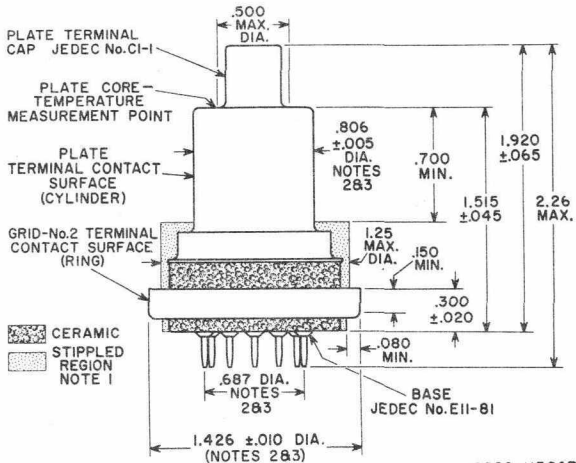

92CS-11306R1

DIMENSIONS IN INCHES

Note 1: Keep all stippled regions clear. Do not allow contacts or circuit components to protrude into these annular volumes.

Note 2: The diameters of the plate terminal contact surface, grid-No.2 terminal contact surface, and pin circle to be concentric within the following values of maximum full indicator reading:

Plate terminal contact surface	
to grid-No.2 terminal contact surface.	0.030"
Plate terminal contact surface	
to pin circle.	0.040"
Grid-No.2 terminal contact surface	
to pin circle.	0.030"


Note 3: The full indicator reading is the maximum deviation in radial position of a surface when the tube is completely rotated about the center of the reference surface. It is a measure of the total effect of run-out and ellipticity.



8462

TYPICAL PLATE CHARACTERISTICS At a Constant Grid-No.2 Voltage of 400 Volts

FILAMENT VOLTS = 2.9
GRID-No.2 VOLTS = 400
GRID-No.1 VOLTS = E_C

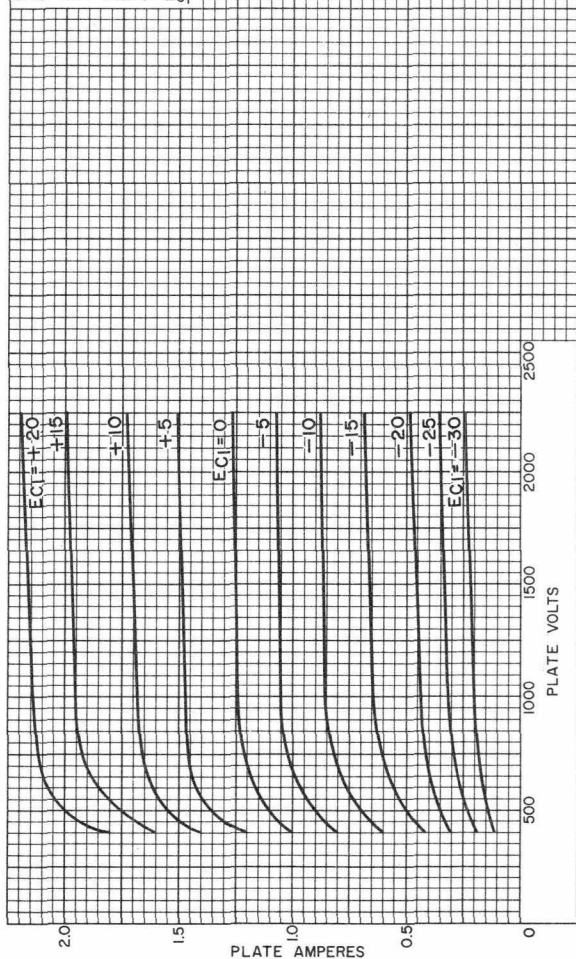


92CM-12225



TYPICAL PLATE CHARACTERISTICS

At a Constant Grid-No.2 Voltage of 250 Volts

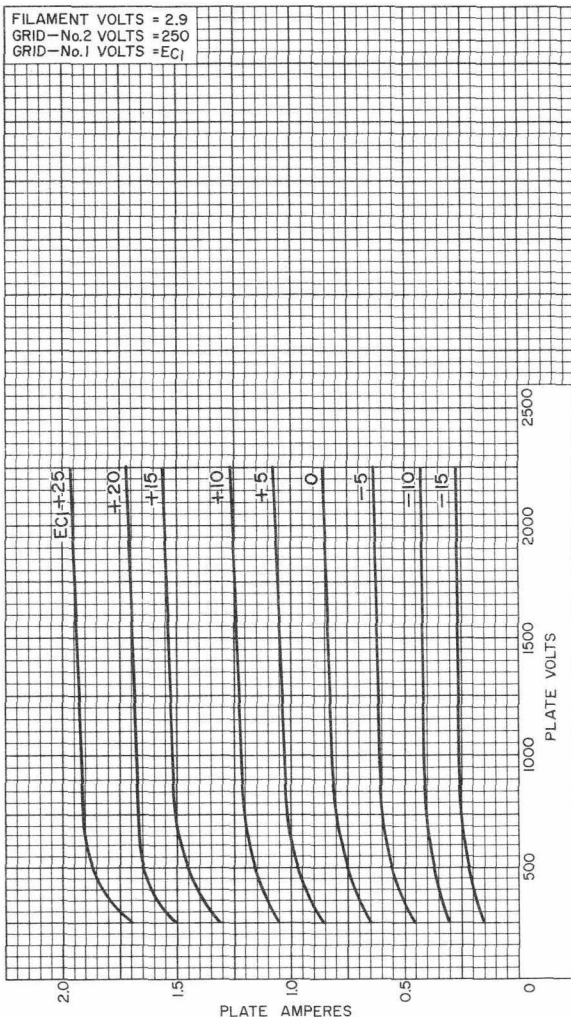


92CM-12228



8462

TYPICAL PLATE CHARACTERISTICS At a Constant Grid-No.2 Voltage of 150 Volts

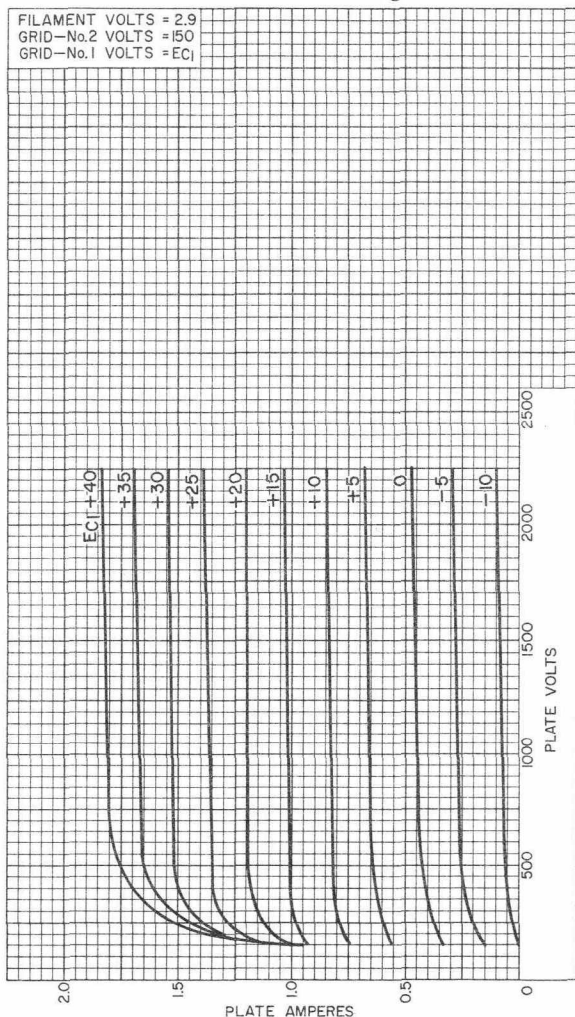


92CM-12234



TYPICAL CHARACTERISTICS

At a Constant Grid-No.2 Voltage of 400 Volts

FILAMENT VOLTS = 2.9
 GRID—No.2 VOLTS = 400
 GRID—No.1 VOLTS = E_{C1}
 I_{C1} = _____
 I_{C2} = _____

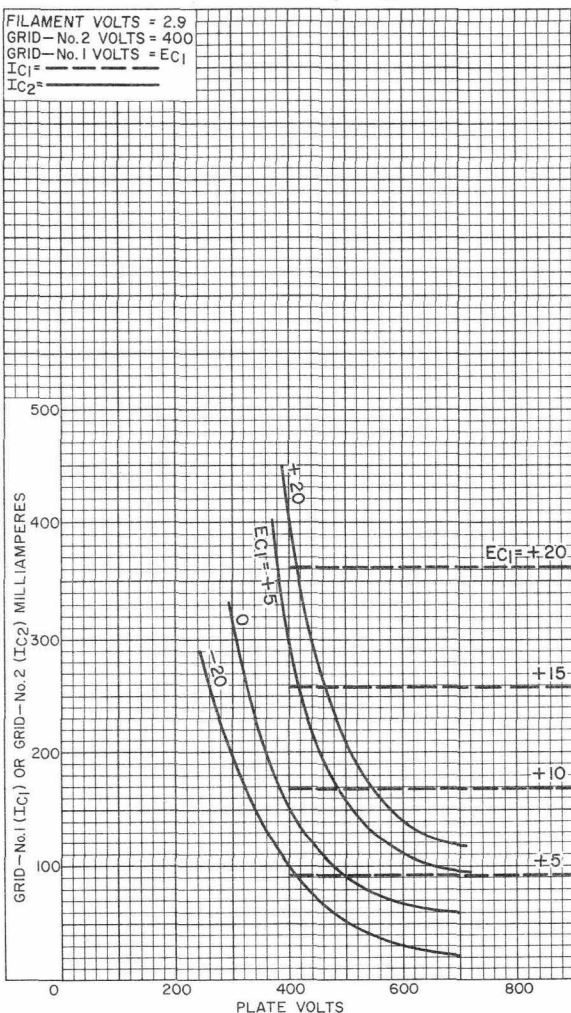

92CM-12226




RADIO CORPORATION OF AMERICA
 Electronic Components and Devices
 Harrison, N. J.

DATA 5
 6-64


TYPICAL CHARACTERISTICS

At a Constant Grid-No.2 Voltage of 250 Volts

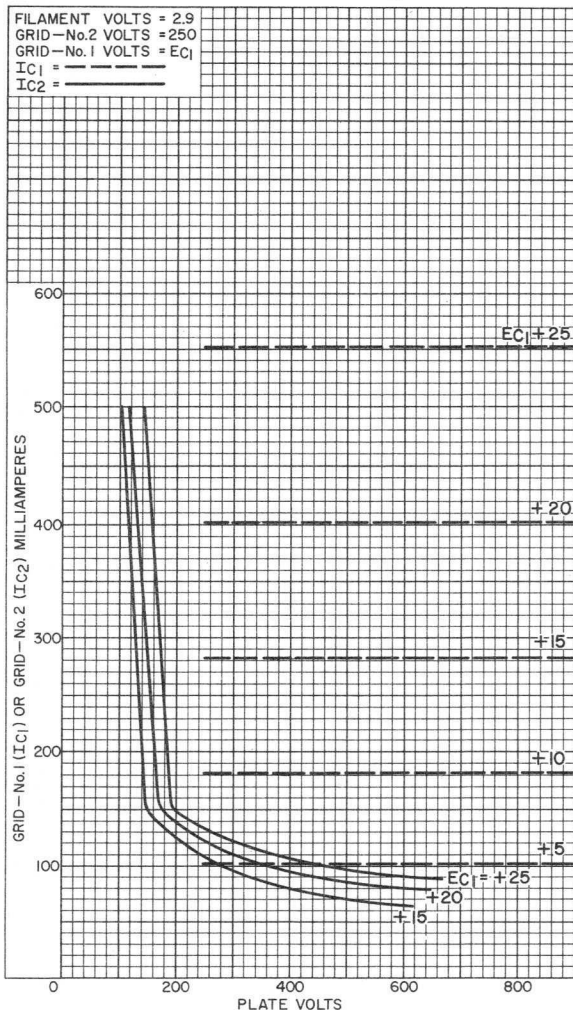

92CM-12229


TYPICAL CHARACTERISTICS At a Constant Grid-No.2 Voltage of 150 Volts

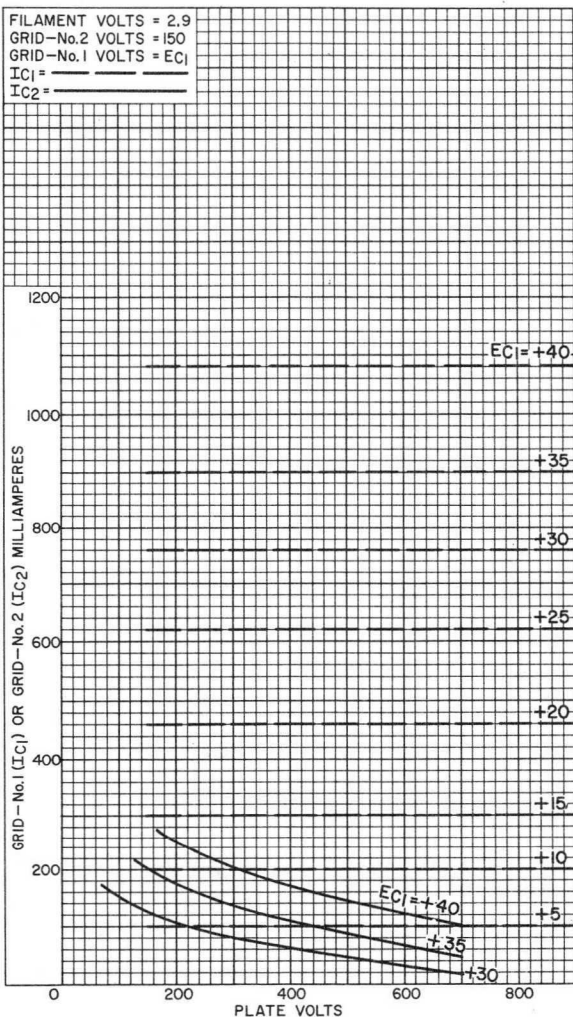

92CM-12241



TYPICAL CONSTANT-CURRENT CHARACTERISTICS At a Constant Grid-No.2 Voltage of 400 Volts

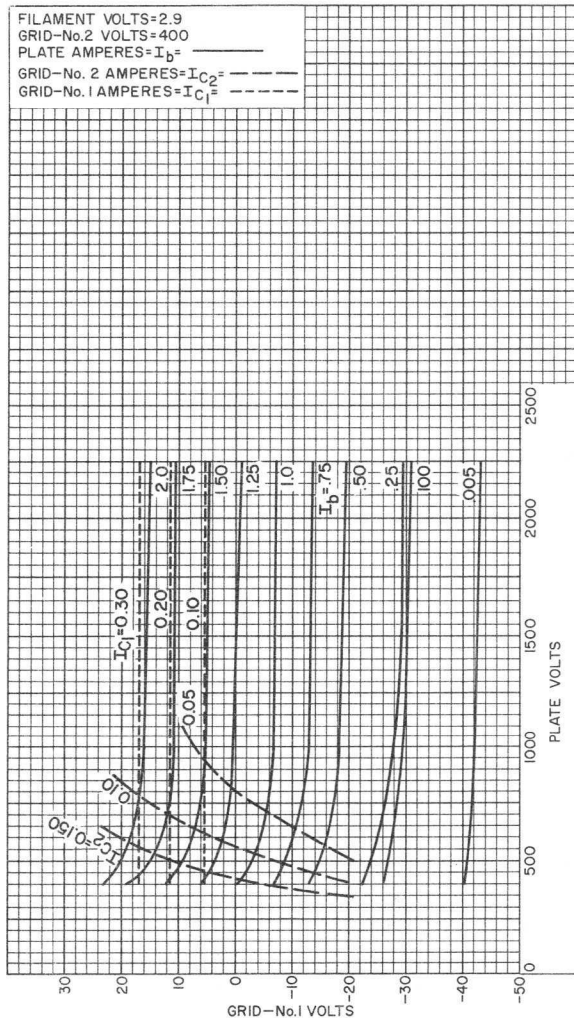


92CM-12227

TYPICAL CONSTANT-CURRENT CHARACTERISTICS

At a Constant Grid-No.2 Voltage of 250 Volts

FILAMENT VOLTS = 2.9
 GRID-No.2 VOLTS = 250
 PLATE AMPERES = I_b = _____
 GRID-No.2 AMPERES = I_{C2} = - - - - -
 GRID-No.1 AMPERES = I_{C1} = - - - - -

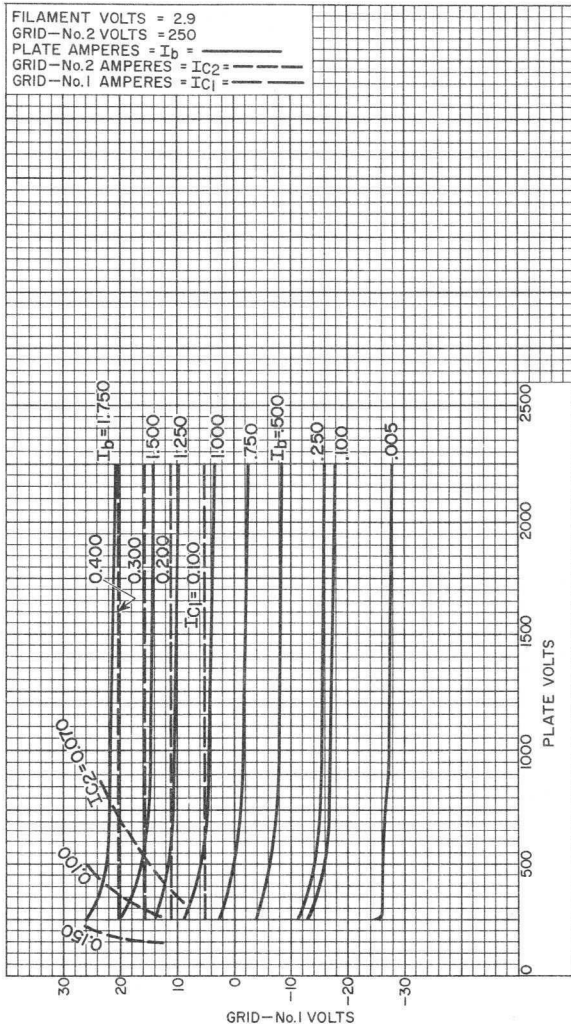

92CM-12233



8462

TYPICAL CONSTANT-CURRENT CHARACTERISTICS At a Constant Grid-No.2 Voltage of 150 Volts


FILAMENT VOLTS = 2.9

GRID-No.2 VOLTS = 150

PLATE AMPERES = I_b = _____

GRID-No.2 AMPERES = I_{C2} = _____

GRID-No.1 AMPERES = I_{C1} = _____

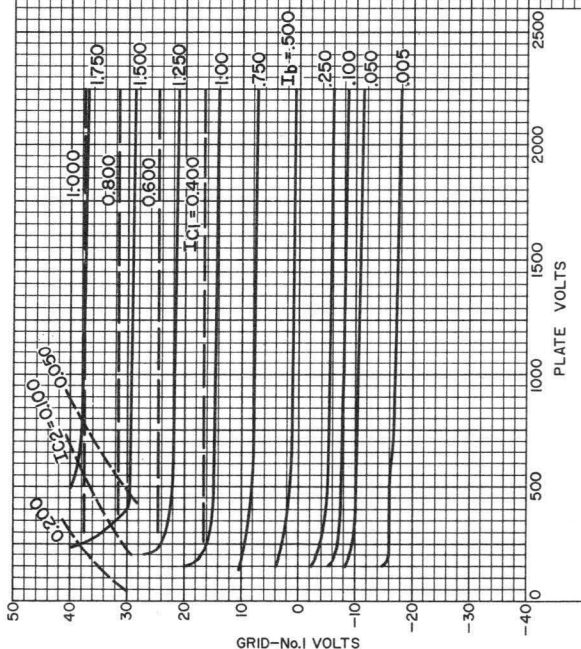

92CM-12240

