


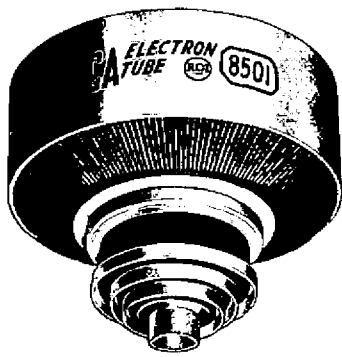

CERMOLOX®
Thoriated-tungsten Mesh Filament
Forced-Air Cooled
5500 Watts UHF TV Output at 890 Mc
5500 Watts CW Output at 900 Mc
High Gain-Bandwidth Products

from JEDEC release #4660.
April 6, 1964

RCA-8501

BEAM POWER TUBE

RCA-8501[▲] is a forced-air-cooled beam power tube designed especially for use in uhf television service in stationary and portable equipment. It is rated as an rf power amplifier in Class B television service, an rf power amplifier and oscillator in Class C telegraphy service, and an rf power amplifier in Class C FM telephony service.

The 8501 and variants of its basic design may also be useful in applications such as af power amplifiers or modulators, plate-modulated rf power amplifiers in Class C telephony service, AM or single-sideband linear rf power amplifiers, hard-tube modulators, pulsed-rf amplifiers, regulators, or other special services. Variations in cooling structure or other parameters are also possible. For information on variants, contact your RCA field representative, or the nearest District Sales Office.

Features of the 8501 include the Cermolox construction, a thoriated-tungsten mesh filament, and an integral louvered-fin radiator. Details of these features are described in the **Application Guide for RCA Power Tubes, 1CE-300**.

[▲] Formerly Dev. No. A2751C.

INDEX	
I. DESCRIPTION	page
General Data	1
Ratings	2
Footnotes	2
Dimensional Outline	3
Terminal Diagram	3
II. CHARACTERISTICS	
Constant-Current Curves	4
Cavity Tuning Curves	5
Cooling	6
Mounting	6
III. GENERAL APPLICATIONS	
This bulletin is to be used in conjunction with the publication Application Guide for RCA Power Tubes, 1CE-300 . For a copy, write RCA, Commercial Engineering, Harrison, N.J.	

GENERAL DATA

Electrical:

Filamentary Cathode, Thoriated-Tungsten Mesh Type:

Voltage (ac or dc)	{ 4.5 typical volts 5.0 max. volts
Current:	
Typical value at 4.5 volts	125 amp
Maximum value for starting, even momentarily	300 amp
Cold Resistance	0.005 ohm
Minimum heating time	15 sec

See further information on the filament in **Application Guide for RCA Power Tubes, 1CE-300; Section V.A.3, Filament or Heater**.

Mu-Factor, Grid No.2 to Grid No.1 for plate volts = 1200, grid-No.2 volts = 900, and plate amp. = 8 16

Direct Interelectrode Capacitances:

Grid No.1 to plate ^a	0.32 max. pf
Grid No.1 to filament	65 pf
Plate to filament ^{ab}	0.040 max. pf
Grid No.1 to grid No.2	70 pf
Grid No.2 to plate	13 pf
Grid No.2 to filament ^b	2.0 max. pf

Mechanical:

Operating Position	Vertical, either end up
Overall Length	5.65" max.
Greatest Diameter	6.17" max.
Terminal Connections	See <i>Dimensional Outline</i>
Radiator	Integral part of tube
Weight (Approx.)	10 lbs.

Thermal:

Terminal Temperature (Plate, grid No.2, grid No.1, cathode-filament and filament)	250 max. °C
Plate-Core Temperature	250 max. °C

See *Dimensional Outline for temperature-measurement points*

Information furnished by RCA is believed to be accurate and reliable. However, no responsibility is assumed by RCA for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of RCA.



RADIO CORPORATION OF AMERICA
Electronic Components and Devices Lancaster, Pa.

Trademark(s) ® Registered
Marca(s) Registrada(s)

8501 3-64
Printed in U.S.A.

RF POWER AMPLIFIER --**Class B Television Service^c**

*Synchronizing-level conditions per tube
unless otherwise specified*

Maximum CCS Ratings, Absolute-Maximum Values:

DC PLATE VOLTAGE.	7000 max.	volts
DC GRID-No.2 VOLTAGE	1500 max.	volts
DC PLATE CURRENT.	4 max.	amp
PLATE DISSIPATION	10,000 max.	watts
GRID-No.2 INPUT.	150 max.	watts
GRID-No.1 INPUT.	100 max.	watts

Typical CCS Operation:

In a cathode-drive circuit at 890Mc and bandwidth of 8.5Mc

DC Plate Voltage	5700	volts
DC Grid-No.2 Voltage	1000	volts
DC Grid-No.1 Voltage	-40	volts
DC Plate Current:		
Synchronizing level	2.9	amp
Pedestal level	2.2	amp
DC Grid-No.2 Current:		
Synchronizing level	0.015	amp
Pedestal level	0.011	amp
DC Grid-No.1 Current:		
Synchronizing level	0.375	amp
Pedestal level	0.275	amp
Driver Power Output:		
Synchronizing level	600	watts
Pedestal level	335	watts
Output Circuit Efficiency.	80	%
Useful Power Output:		
Synchronizing level	5500	watts
Pedestal level	3100	watts

RF POWER AMPLIFIER & OSCILLATOR -- Class C Telegraphy^c

and

RF POWER AMPLIFIER -- Class C FM Telephony^c**Maximum CCS Ratings, Absolute-Maximum Values:**

DC PLATE VOLTAGE.	7000 max.	volts
DC GRID-No.2 VOLTAGE	1500 max.	volts
DC GRID-No.1 VOLTAGE	-100 max.	volts
DC PLATE CURRENT.	3 max.	amp
DC GRID-No.1 CURRENT	0.65 max.	amp
GRID-No.1 INPUT ^d	100 max.	watts
GRID-No.2 INPUT ^e	150 max.	watts
PLATE DISSIPATION	10,000 max.	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	5,000 max.	ohms
Grid-No.2-Circuit Impedance	.See Note d	
Plate-Circuit Impedance	.See Note f	

Typical CCS Operation:

In Cathode-Drive Circuit at 900Mc

DC Plate Voltage	5700	volts
DC Grid-No.2 Voltage	1000	volts
DC Grid-No.1 Voltage	-85	volts
DC Plate Current	2.7	amp
DC Grid-No.2 Current	0.025	amp
DC Grid-No.1 Current	0.200	amp
Driver Power Output.	900	watts
Output-Circuit Efficiency.	72	%
Useful Power Output.	5500	watts

FOOTNOTES

^a With external flat metal shield 8" in diameter having a center hole 3" in diameter. Shield is located in plane of the grid-No.2 terminal, perpendicular to the tube axis, and is connected to grid No.2.

^b With external flat metal shield 8" in diameter having a center hole 2-3/8" in diameter. Shield is located in plane of the grid-No.1 terminal, perpendicular to the tube axis, and is connected to grid No.1.


^c See Section V.C. of 1CE-300.

^d See Section V.B.2 of 1CE-300.

^e See Section V.B.3 of 1CE-300.

^f See Section V.B.1 of 1CE-300.

DIMENSIONAL OUTLINE

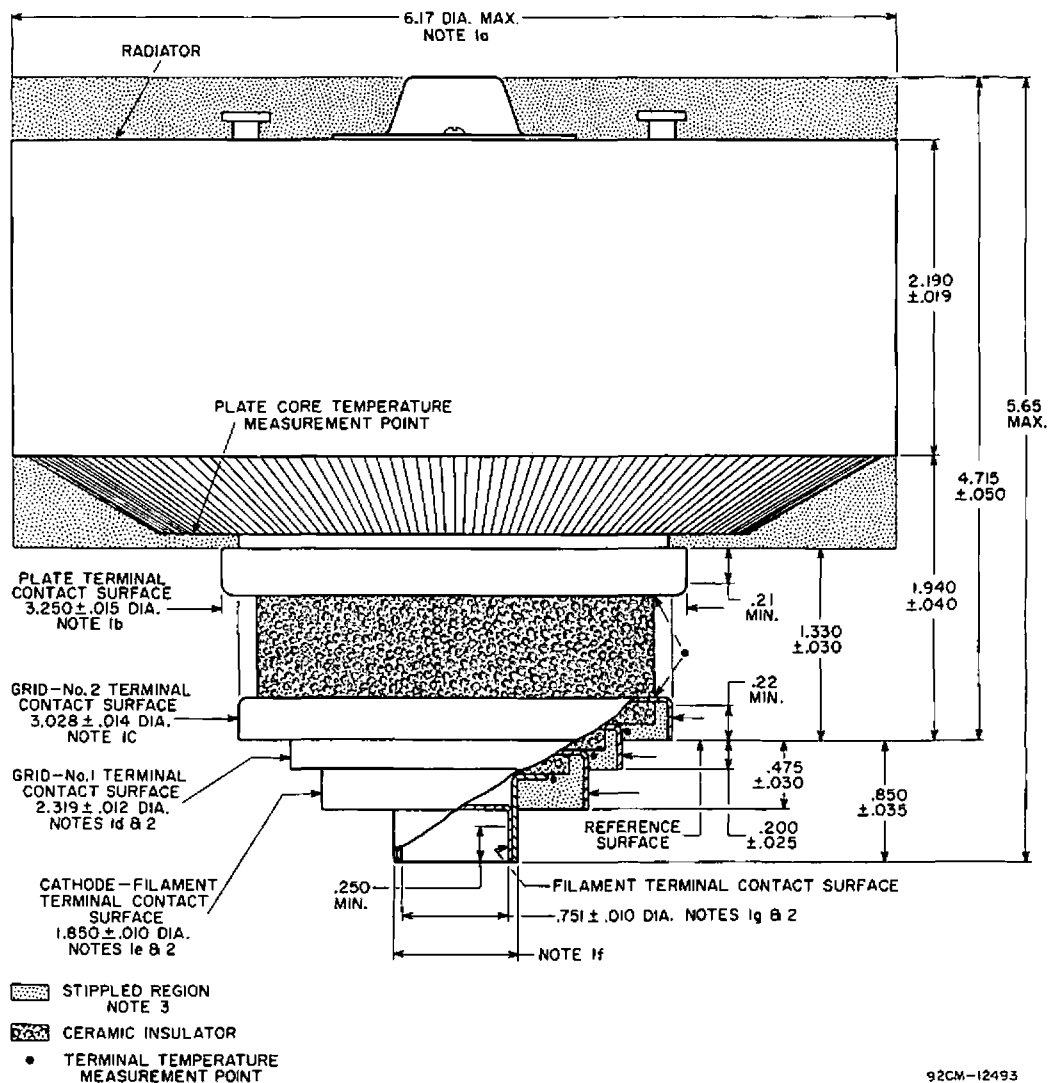

DIMENSIONS IN INCHES


NOTE 1: CONCENTRICITY BETWEEN THE VARIOUS DIAMETERS IS SUCH THAT THE TUBE WILL ENTER A GAUGE HAVING SUITABLY SPACED CONCENTRIC APERTURES AND POSTS OF THE FOLLOWING DIAMETERS:

- a. Radiator - 6.240
- b. Plate Terminal - 3.288
- c. Grid-No.2 Terminal - 3.061
- d. Grid-No.1 Terminal - 2.338
- e. Cathode-Filament Terminal - 1.878
- f. Filament Terminal (OD) - 0.908
- g. Filament Terminal (ID) - 0.722


NOTE 2: THE DIAMETER OF THE TERMINAL IS HELD TO THE INDICATED VALUE ONLY OVER THE CONTACT SURFACE LENGTH. THE CONTACT SURFACE LENGTH OF THE FILAMENT, CATHODE-FILAMENT, AND GRID-No.1 TERMINALS EXTENDS FROM THE EDGE OF ITS TERMINAL TO THE PLANE COINCIDENT WITH THE EDGE OF THE ADJACENT LARGER TERMINAL.

NOTE 3: KEEP ALL STIPPLED REGIONS CLEAR. DO NOT ALLOW CONTACTS OR CIRCUIT COMPONENTS TO PROTRUDE INTO THESE ANNULAR REGIONS.

TERMINAL DIAGRAM




TYPICAL CONSTANT-CURRENT CHARACTERISTICS

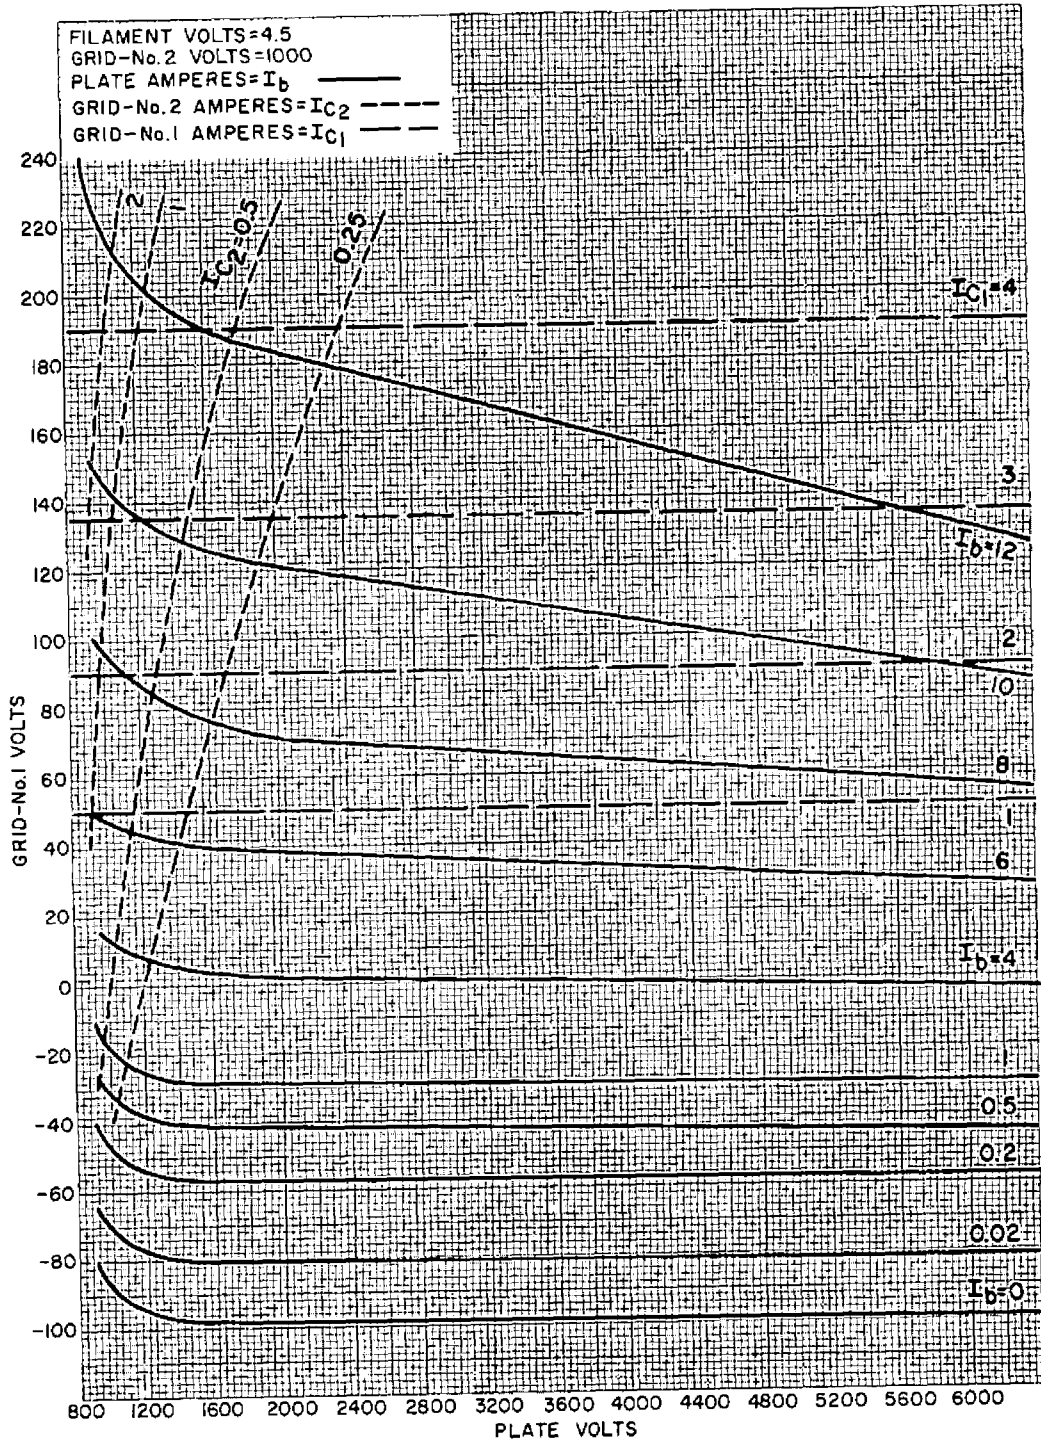

92CM-12500

CAVITY TUNING CHARACTERISTICS

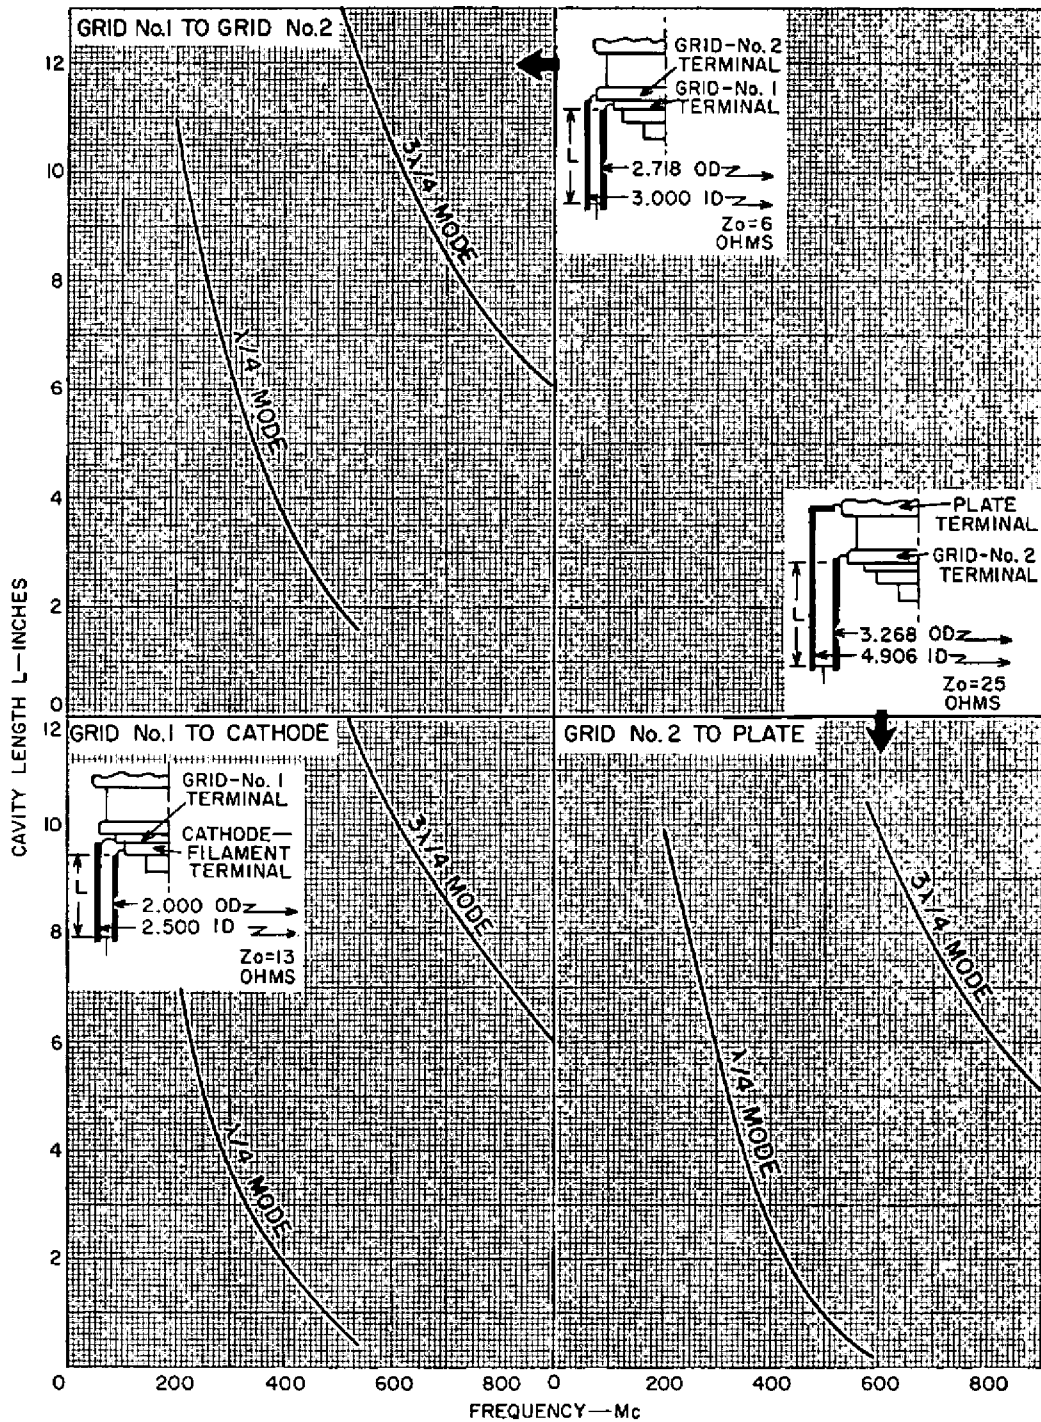

92CM-12492

FORCED-AIR COOLING

Air Flow:

Through radiator -- Adequate air flow to limit the plate-core temperature to 250°C should be delivered by a blower through the radiator before and during the application of filament, plate, grid-No.2, and grid-No.1 voltages.


To Plate, Grid-No.2, Grid-No.1, Cathode-Filament, and Filament Terminals -- A sufficient quantity of air should be allowed to flow past each of these terminals so that their temperature does not exceed the specified maximum value of 250°C .

During Standby Operation -- Cooling air is required when only filament voltage is applied to the tube.


During Shutdown Operation -- Air flow should continue for a few minutes after all electrode power is removed.

For further information on forced-air cooling, see section IV.C of 1CE-300.

TYPICAL COOLING CHARACTERISTICS

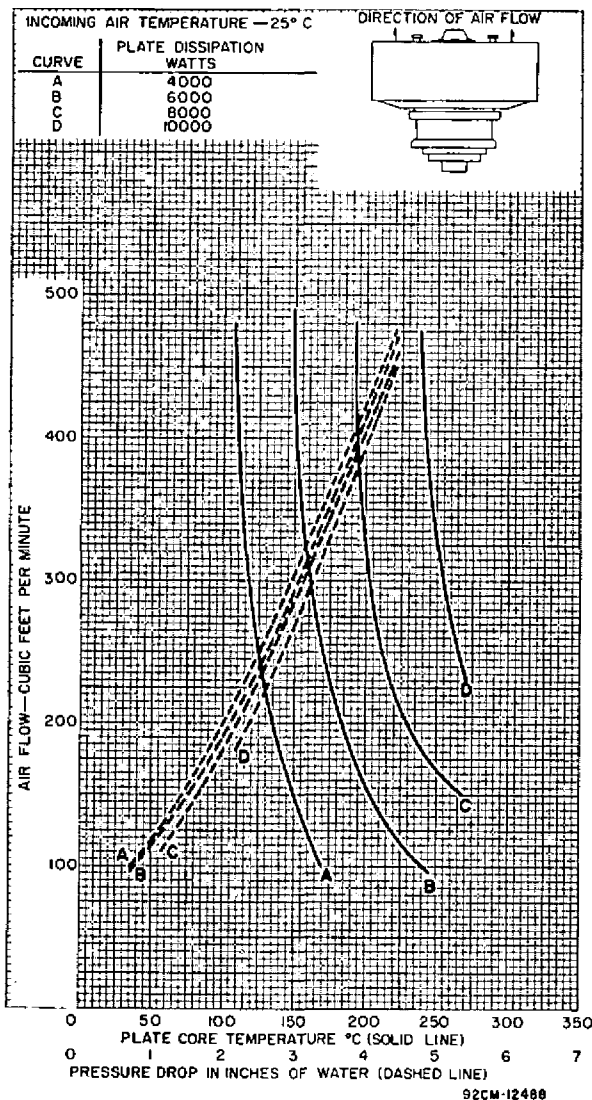

TUBE EXTRACTOR Suggested Design

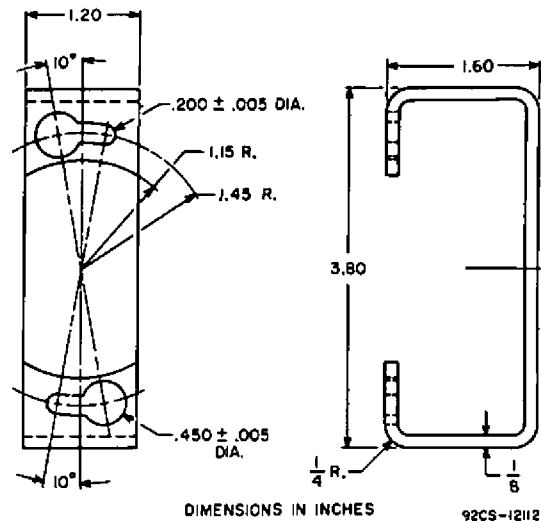

NOTE 1: MATERIAL $1/8"$ THICK COLD ROLLED STEEL.


NOTE 2: SLOT BETWEEN HOLES.

NOTE 3: ROUND ALL EDGES.

Mounting

See the preferred mounting arrangement below. For other arrangements, cavity-type mounting for multiple-ring terminal-type tubes, such as the 8501 may be constructed by using either fixed or adjustable contact rings of finger contact strips in the transverse plane as described in section III.C.3 of 1CE-300.

PREFERRED MOUNTING ARRANGEMENT

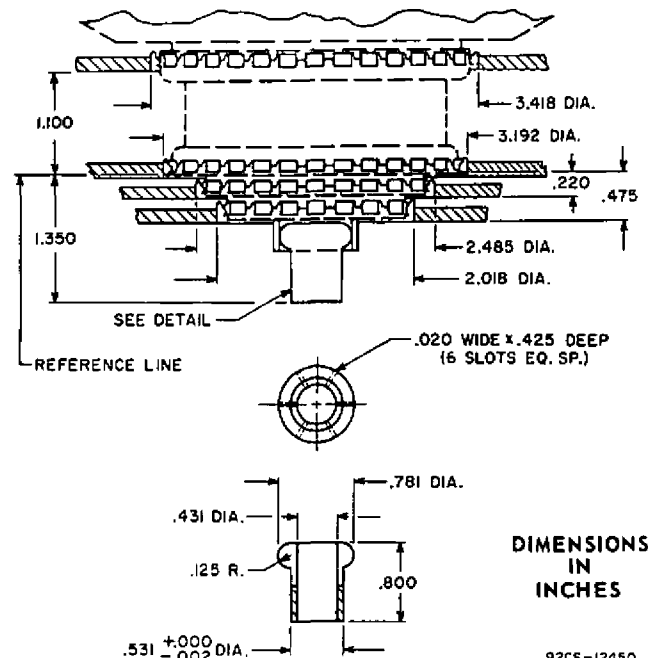

NOTE: ALL FINGER STOCK No.97-380, MADE BY INSTRUMENT SPECIALTIES Co., LITTLE FALLS, N.J.