



MERCURY VAPOUR RECTIFIER

AH205/857B ←

March 1959 Page 1

Service Type CV2673

American Equivalent 857B

INTRODUCTION

The AH205/857B is a hot cathode Mercury Vapour Rectifier with maximum ← ratings of 22kV peak inverse voltage and 40A peak current. It will provide a D.C. output of 21kV 30A in a three phase full wave circuit or 7kV 20A in a single phase full wave circuit.

GENERAL DATA

(See also Preamble to Rectifier Section of this Catalogue)

Electrical

Filament	..	..	..	..	..	..	Oxide Coated
Filament Voltage	..	..	..	..	..	..	5·0 V
Filament Current	..	..	..	..	..	..	30 A
Filament Heating Time	..	..	..	..	..	..	1 Minute
Condensed Mercury Temperature	..	..	..	..	..	..	(See page 2)
Max Peak Inverse Voltage	..	..	..	..	..	..	(See page 2)
Max Anode Current:							
Peak	..	..	..	..	..	..	40 A
Mean (30 seconds Max averaging time)	..	..	..	..	..	..	10 A ←
Under fault conditions	..	..	..	..	..	..	400 A
(0·2 seconds Max duration)							

Mechanical

Overall Length..	..	..	..	19·88 inches	(505 mm)	Max
Overall Diameter	..	..	..	7·63 inches	(194 mm)	Max
Net Weight	..	..	..	4·0 pounds	(1·8 kg)	Approx
Mounting Position	..	..	..	..	..	Vertical, base down
Base	..	..	..	..	..	(See outline drawing)

CONTROL OF CONDENSED MERCURY TEMPERATURE

On the following pages two curves are given showing:

1. Total heating time for any value of ambient temperature. This is for use when the valve is being switched on from cold.
2. Rise of condensed mercury temperature above ambient plotted against heating and cooling time. This can be used as indicated by the example in the preamble to this section of the catalogue.

← Indicates a change



MERCURY VAPOUR RECTIFIER

AH205/857B

Page 2

MAXIMUM OPERATING CONDITIONS (Absolute Values—see Preamble)

Circuit	* Dia- gram	Con- densed Mercury Temp. °C	Peak Inverse Voltage (50-60 c/s) kV	Anode current in Amperes		Trans- former Secondary Voltage (R.M.S.) kV	Max. D.C. Output	
				Peak	Mean‡		kV	Amps
Single Phase Full Wave	A	30-40	22	40	10	7.7	7.0	20
		25-60	10	40	10	3.5	3.1	20
Single Phase Full Wave Bridge	B	30-40	22	40	10	15.5	14.0	20
		25-60	10	40	10	7.0	6.3	20
Three Phase Half Wave	C	30-40	22	40	10	9.0†	10.5†	30
		25-60	10	40	10	4.1†	4.7†	30
Three Phase Full Wave	D	30-40	22	40	10	9.0	21.0	30
		25-60	10	40	10	4.1	9.5	30

*For diagrams see Typical Rectifier Circuits for Choke Input Filters in the preamble to this section of the catalogue.

†For operation with constant full load. If the load resistance is increased the secondary voltage should be decreased (to avoid excessive peak inverse voltage) until at no load the reduction is 14%. The D.C. output voltage will be correspondingly decreased.

‡Mean anode currents are averaged over any period of 30 seconds maximum.


X-RAY WARNING

X-Rays are produced when the AH205/857B is operated with a peak inverse anode voltage above 16 kV (absolute value). These rays can constitute a health hazard unless the valve is adequately shielded for X-ray radiation. This is entirely a function of high voltage devices and does not reflect upon the design of the valve.

→ Indicates a change

ENGLISH ELECTRIC VALVE CO. LTD.
CHELMSFORD ESSEX, ENGLAND TECHNICAL PUBLICATIONS

Printed in England




MERCURY VAPOUR RECTIFIER

AH205/857B


March 1959 Page 3

TOTAL HEATING TIME CHARACTERISTIC

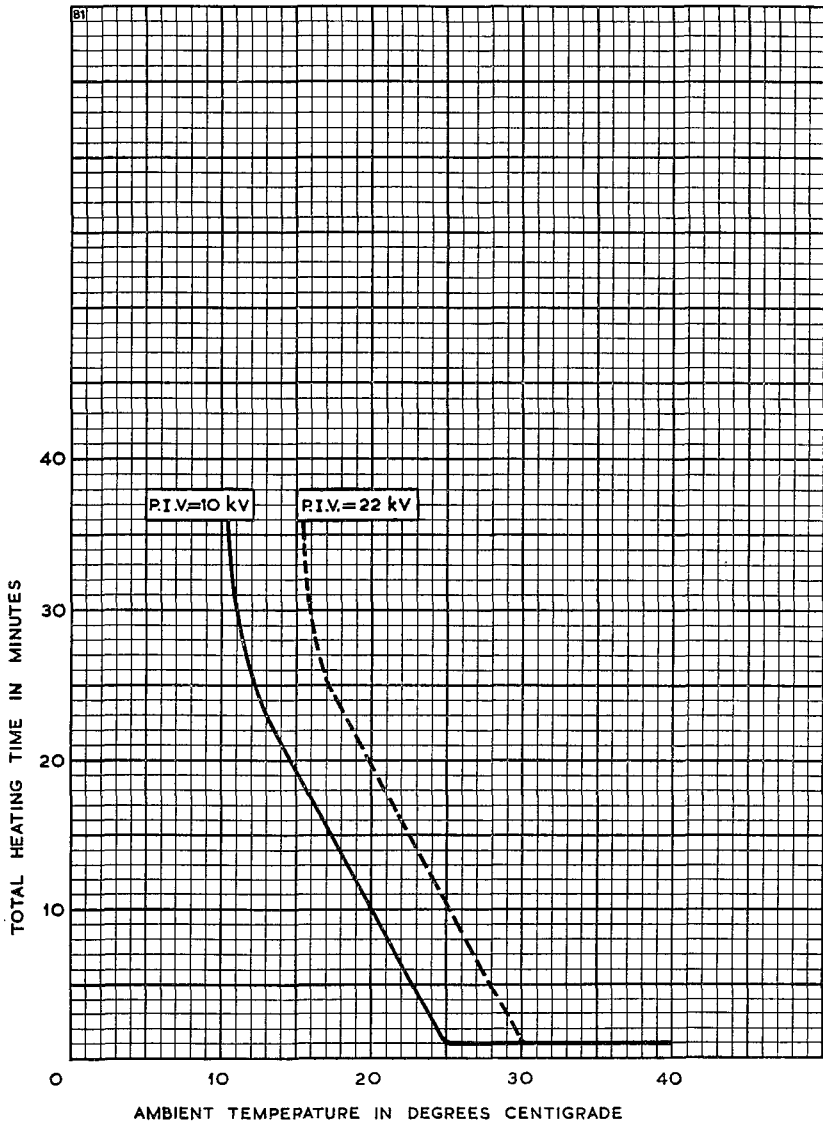

ENGLISH ELECTRIC VALVE CO. LTD.
CHELMSFORD ESSEX, ENGLAND TECHNICAL PUBLICATIONS

Printed in England




MERCURY VAPOUR RECTIFIER

AH205/857B

Page 4

HEATING AND COOLING CHARACTERISTIC

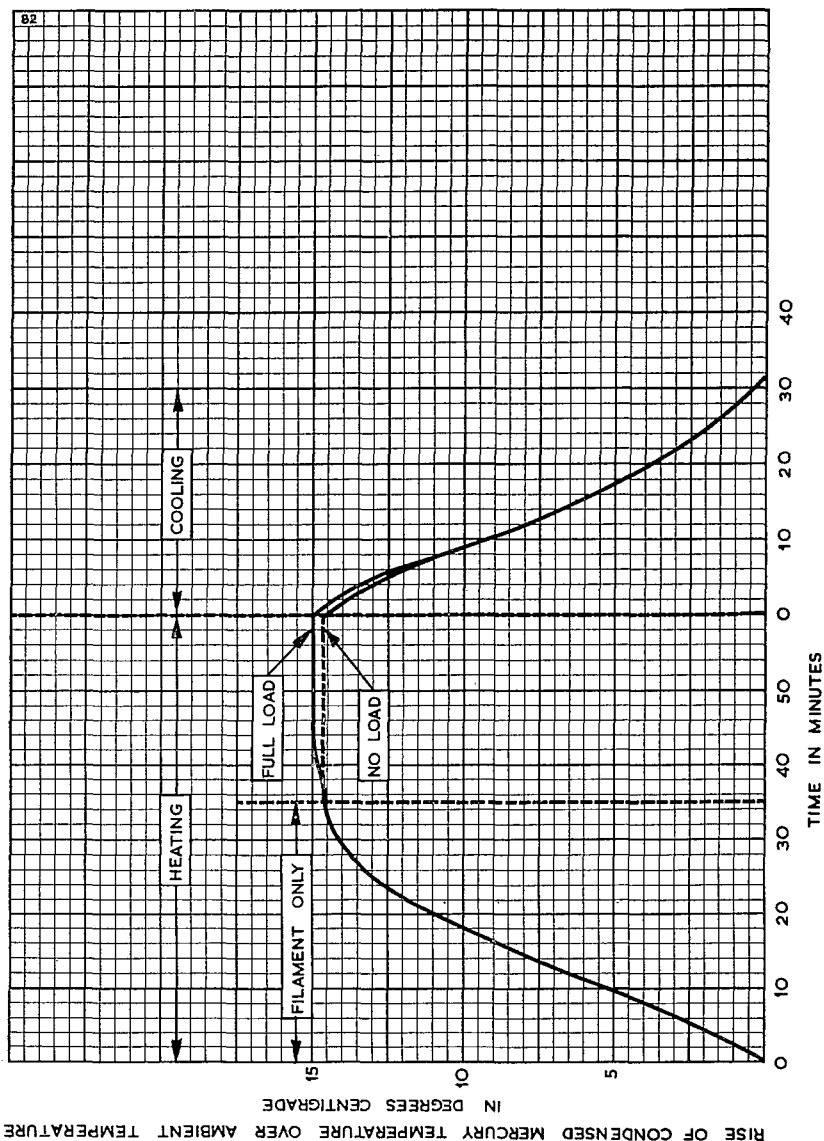

ENGLISH ELECTRIC VALVE CO. LTD.
CHELMSFORD ESSEX, ENGLAND TECHNICAL PUBLICATIONS

Printed in England




MERCURY
VAPOUR
RECTIFIER

AH205/857B

March 1959 Page 5

OUTLINE

83

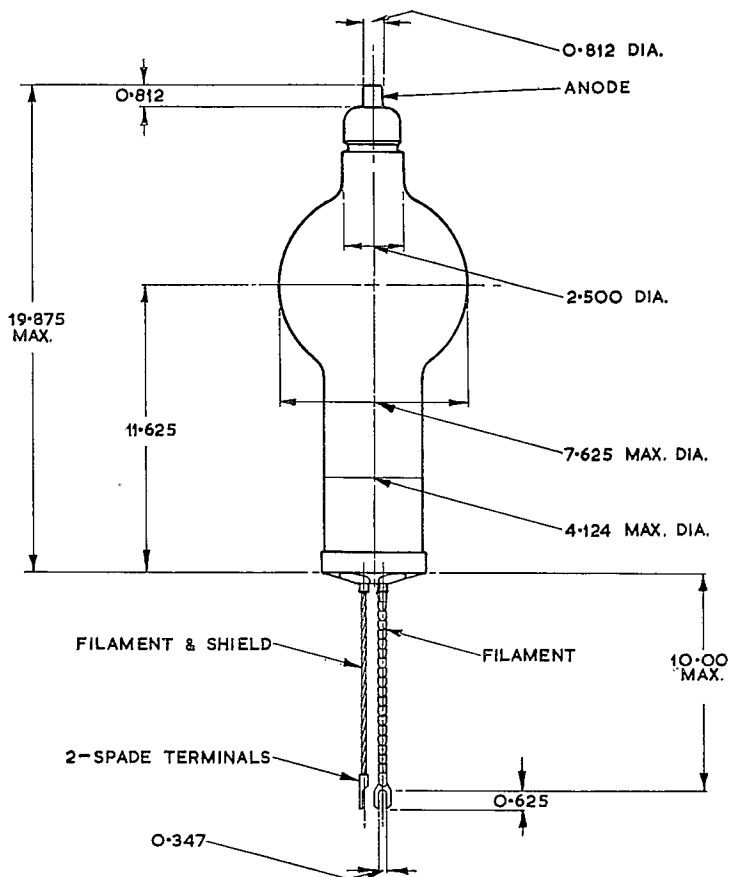

ALL DIMENSIONS IN INCHES

ENGLISH ELECTRIC VALVE CO. LTD.
CHELMSFORD ESSEX, ENGLAND TECHNICAL PUBLICATIONS

Printed in England