

High-Mu Triode

NUVISTOR TYPE

For Cathode-Drive, Low-Level Class-C
RF-Power-Amplifier, Oscillator, or Fre-
quency-Multiplier Applications to 1.2 GHz

ELECTRICAL CHARACTERISTICS - Bogey Values

Heater Voltage, dc or ac	E_h	6.3	V
Heater Current at $E_h = 6.3$ V.	I_h	340	mA
Direct Interelectrode Capacitances:			
Without external shield			
Input: K to (G, S, H)	c_i	9.6	pF
Output: P to (G, S, H)	c_o	2.7	pF
Heater to cathode	c_{hk}	2.6	pF
Plate to cathode	c_{pk}	0.050	pF

For the following characteristics, see Conditions below:

Amplification Factor	μ	100	
Plate Resistance (Approx.) ..	r_p	6400	Ω
Transconductance	g_m	18000	μmho
DC Plate Current	I_b	15	mA
Cutoff DC Grid Voltage for $I_b = 10 \mu\text{A}$	$E_{c(\text{co})}$	-5	V

Conditions

Heater Voltage	E_h	6.3	V
Plate Supply Voltage	E_{bb}	200	V
Grid Supply Voltage	E_{cc}	0	V
Cathode Resistor	R_k	68	Ω

MECHANICAL CHARACTERISTICS

Dimensional Outline	See Outline Drawing		
Maximum Overall Length (l_m)		0.985	in
Maximum Seated Length (l_{sm})		0.780	in
Maximum Diameter (d_m)		0.440	in
Envelope	JEDEC Designation MT4		
Top Cap ^a	Small (JEDEC Designation C1-46)		

Base^a Medium-Ceramic-Wafer Twelvvar 6-Pin
(JEDEC Designation E6-93)

Type of Cathode Coated Unipotential

Operating Position Any

Cooling Conduction

MAXIMUM RATINGS - Absolute-Maximum Values^b

*For operation as a low-level class-C rf-power-amplifier,
oscillator, or frequency-multiplier tube at frequencies up
to 1.2 GHz*

ICAS^c

Plate Supply Voltage (E_{bb})

Up to 50,000 feet 1000^d V

Above 50,000 feet See Breakdown-Voltage Characteristics

DC Plate Voltage E_b 1000 V

Grid Voltage:

Peak e_c 30 V

DC E_c $\left\{ \begin{array}{l} +0 \\ -100 \end{array} \right.$ V

Peak Heater-Cathode Voltage e_{hk} ± 100 V

Heater Voltage, dc or ac E_h 5.7 to 6.9 V

Peak Cathode Current i_k 1000 mA

See Pulse-Rating Chart

Average Cathode Current I_k 75 mA

Plate Dissipation P_b 6^e W

Grid Dissipation P_g 200 mW

See Grid-Dissipation Rating Chart

Envelope Temperature^f T_E 200 °C

MAXIMUM CIRCUIT VALUES

ICAS

Grid-Circuit Resistance: R_g

For fixed-bias or cathode-
bias operation:

50 k Ω

See Grid-Circuit-Resistance Rating Chart

TYPICAL OPERATION - CCS^g

As cathode-drive rf power amplifier

Frequency f 1 GHz

Heater Voltage E_h 6.3 V

DC Plate-to-Grid Voltage E_{bg} 206 V

DC Cathode-to-Grid Voltage ..	E_{kg}	5.8	V
From grid resistor of	R_g	300	Ω
Average Plate Current	I_b	50	mA
Average Grid Current	I_c	19	mA
Driving Power (Approx.)	P_g	1.0	mW
Useful Power Output (Approx.)	P_o	5	W

As cathode-drive frequency doubler

Output Frequency	f_o	1.2	GHz
Heater Voltage	E_h	6.3	V
DC Plate-to-Grid Voltage.....	E_{bg}	200	V
DC Cathode-to-Grid Voltage..	E_{kg}	11	V
From grid resistor of	R_g	1000	Ω
Average Plate Current	I_b	38	mA
Average Grid Current	I_c	10.5	mA
Driving Power (Approx.)	P_g	1	W
Useful Power Output (Approx.)	P_o	2	W

TYPICAL OPERATION

As pulsed cathode-drive class-C amplifier

Output Frequency	f_o	1	1	GHz
DC Plate-to-Grid Voltage	E_{bg}	500	1000	V
DC Cathode-to-Grid Voltage ...	E_{kg}	16	20	V
Average Plate Current	I_b	9	4.75	mA
Average Grid Current	I_c	5.5	1.4	mA
Duty Factor	-	2.5	1	%
Pulse Length	-	5	5	μ s
Peak Driving Power	-	30	50	W
Average Driving Power	-	0.75	0.5	W
Peak Useful Power				
Output (Approx.)	-	105	240	W
Average Power Output	-	2.5	2.4	W
Plate Dissipation (Approx.) ..	-	2.4	2.7	W
Gain.....	-	5.4	6.8	dB

^a See *Socket and Connector Information*.

^b As defined in the current issue of EIA Standard RS-239.


^c Intermittent Commercial and Amateur Service.

^d Under no circumstances should this absolute-maximum value be exceeded. For high-altitude operation, the maxi-

imum permissible plate voltage is dependent on atmospheric pressure.

- e This rating applies when the plate-seal temperature is maintained below 200°C by means of an external heat sink such as the center conductor of a coaxial resonator. If no provision is made for additional heat removal, the maximum seal temperature of 200°C will not be exceeded with 4 watts of plate dissipation and a chassis temperature of 25°C.
- f Measured on metal shell in Zone "A" (See *Dimensional Outline*).
- g Continuous Commercial Service.

DIMENSIONAL OUTLINE - Dimensions in Inches (mm)

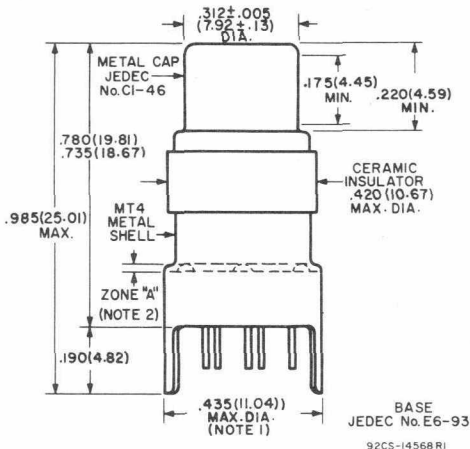


Note 1: Maximum outside diameter of 0.440" (11.17 mm) is permitted along 0.190" (4.83 mm) lug length.


Note 2: Envelope temperature should be measured in zone "A".

MODIFIED BOTTOM VIEW

With Element Connections Indicated and Short Pins Not Shown



TERMINAL DIAGRAM (Bottom View).

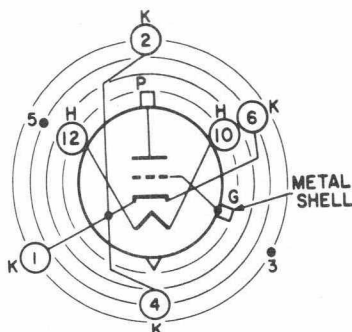

INDEX - LARGE LUG
 ● - SHORT PIN-IC

Pin 1 - Cathode

Pin 2 - Cathode

Pin 3* - Do Not Use

Pin 4 - Cathode

Pin 5* - Do Not Use

Pin 6 - Cathode

Pin 10 - Heater

Pin 12 - Heater

Metal Shell - Grid

Top Cap - Plate

* Pin is of a length such that its end does not touch the socket insertion plane.

TYPE 8808 SOCKET AND CONNECTOR INFORMATION

SOCKET			
Mounting	Body Material	Cinch Mfg. Co. [▲] No.	Cinch-Jones Sales-Division Distributor No.
Crimp	HALON [□]	133 67 90 040 [§]	5NS-4
TOP-CAP CONNECTOR			
For Distributed-Constant Circuit	International Electronic Research Corp. [⊕] Therma-Link Retainer Part No. TXBE-032-031G, or equivalent		
For Lumped-Constant Circuit	Wakefield Engineering, Inc. [●] Semiconductor Cooler Type NF207, or equivalent		

[▲] 1026 South Homan Ave., Chicago, Illinois 60624.


[□] TRADE MARK: Allied Chemical Corp., Morristown, N. J.

[⊕] 135 West Magnolia Blvd., Burbank, Calif. 91502.

[●] 139 Foundry St., Wakefield, Mass. 01880.


[§] This UHF heat-dissipating socket, or equivalent, is recommended to insure adequate electrical and thermal connection to the index rim.

BREAKDOWN-VOLTAGE CHARACTERISTICS

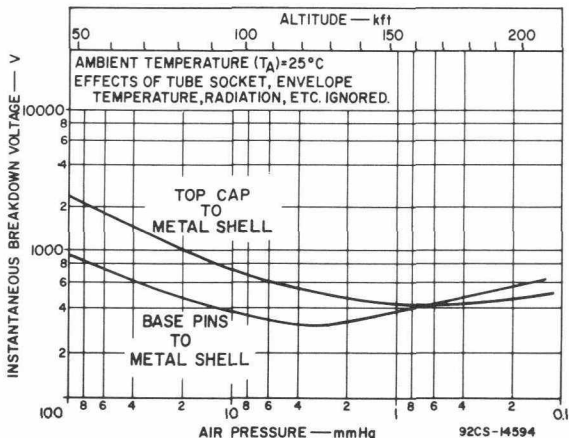


PULSE RATING CHART


The peak cathode current is for a duty factor of up to 1% or pulse duration up to $10\ \mu\text{s}$, whichever is greater.

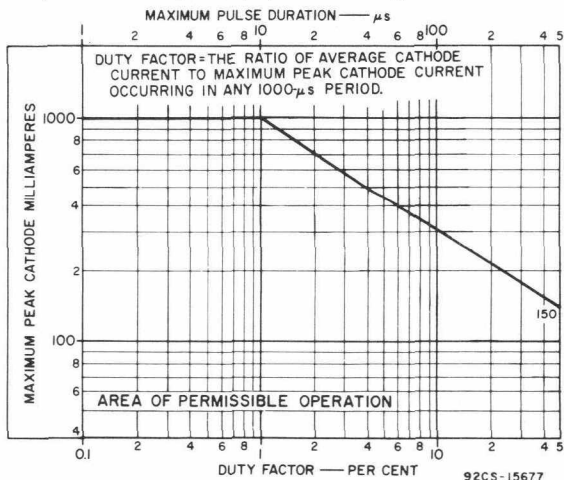


GRID-DISSIPATION RATING CHART

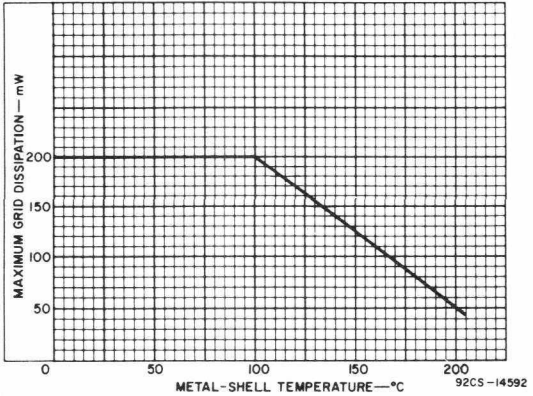

TYPICAL CHARACTERISTICS

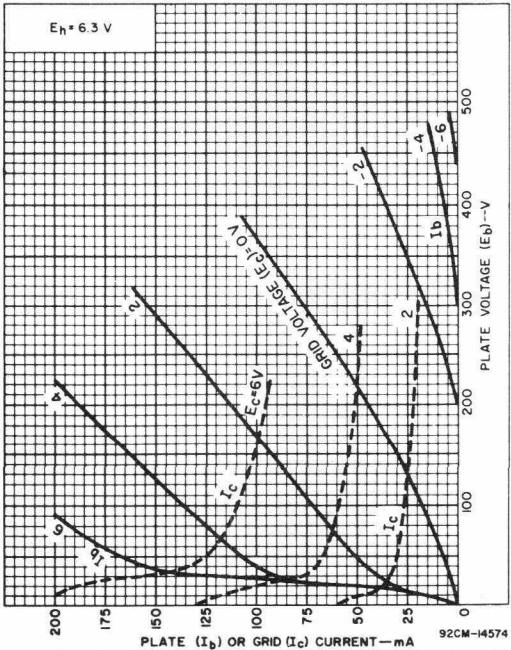

GRID-CIRCUIT-RESISTANCE RATING CHART

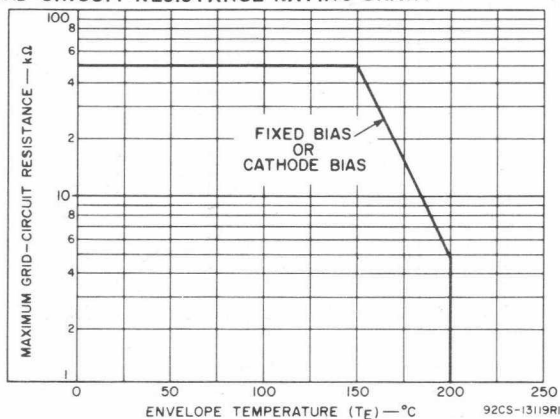

TYPICAL CONSTANT-CURRENT CHARACTERISTICS

