



TECHNICAL DATA

PRELIMINARY DATA

8912

PLANAR TRIODE

The 8912 (formerly X2154) is a compact, rugged ceramic/metal planar triode intended for CW plate- or grid-pulsed oscillator, amplifier, or frequency multiplier use. It features high power output, high plate dissipation and excellent frequency stability under severe environmental conditions. The construction of the 8912 readily lends itself to cavity circuit operation resulting in an extremely compact rf source. The 8912 is capable of providing in excess of 1 kw peak power at 6 GHz.



Actual Size

GENERAL CHARACTERISTICS¹

ELECTRICAL

Cathode: Oxide Coated, Unipotential

Heater: Voltage	6.3 $\pm$ 5% V
Current, at 6.3 volts	0.65 A
Cathode Heating Time	60 sec.
Transconductance (Average)	30 mmhos
Amplification Factor (Average)	85
Direct Interelectrode Capacitance, without heater voltage	
Grid-Cathode	5.00 pF
Grid-Plate	1.50 pF
Plate-Cathode (maximum)	0.06 pF
Plate Dissipation (maximum) ²	50 W
Grid Dissipation (maximum)	1.5 W

1. The data presents the nominal design objectives for this product and the characteristics and specifications of this type are subject to change. The device is now under development and is made available for experimental purposes only. For the most recent information concerning the status of this development, please contact your nearest Varian Electron Tube and Device Field Office or the Product Manager, Eimac Division of Varian, Salt Lake City, Utah.

2. With forced air cooling or appropriate conduction and/or convection cooling.

MECHANICAL

Maximum Overall Dimensions:

Length	1.013 in; 25.73 mm
Diameter	0.608 in; 15.44 mm
Net Weight	0.25 oz; 7.0 gm
Operating Position	Any
Maximum Operating Temperature:	
Ceramic/Metal Seals	250°C
Cooling	Conduction and Forced Air

(Effective 2-1-71) © by Varian

Printed in U.S.A.

RF OSCILLATOR

Class C, Pulsed

ABSOLUTE MAXIMUM RATINGS:

DC PLATE VOLTAGE	2.0 kVdc
PEAK PLATE VOLTAGE	2.5 kv
DC PLATE CURRENT	100 mA _{dc}
DC GRID CURRENT	30 mA _{dc}
PEAK PLATE CURRENT	3.0 a at .0025 DUTY 1.5 a at .01 DUTY
PEAK GRID CURRENT	1.2 a at .0025 DUTY 0.7 a at .01 DUTY

DC GRID VOLTAGE	-100 Vdc
PULSE DURATION ¹	3.0 μ s
DUTY FACTOR ¹	.01
PEAK HEATER-CATHODE VOLTAGE ²	± 50 v
FREQUENCY	6.0 GHz

1. For applications requiring longer pulse duration and/or higher duty factor, please consult the Product Manager, EIMAC-Division of Varian, Salt Lake City, Utah.


2. The heater is electrically isolated from the cathode.

APPLICATION

The cathode and grid flanges should not be altered in any way such as by machining or filing, since final seal could be damaged. Maximum torque applied to flanges during installation should not exceed 15 inch pounds.

For optimum rf performance, the anode line should make good rf contact on the anode area indicated in the outline drawing.


Soldered connections may be made to the anode stud, grid or cathode flanges, and heater contacts where adequate heat sinking and good soldering practices are followed to minimize the heat applied to the tube and the thermal gradient across the metal to ceramic brazed areas. For operating information refer to EIMAC bulletin #15, "Operating Instructions for Planar Triodes".

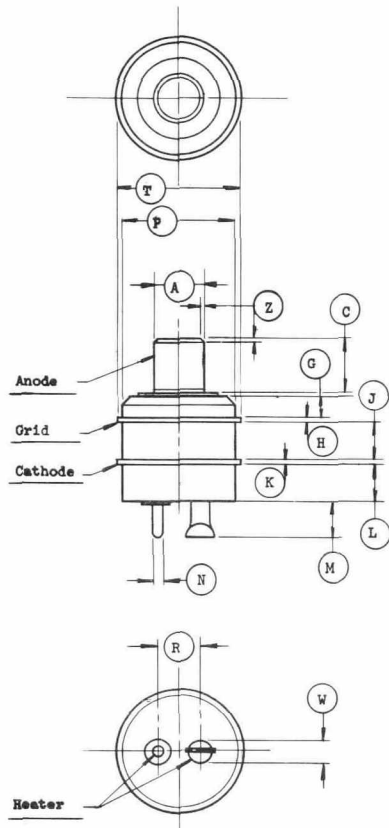

DIM.	INCHES			MILLIMETERS		
	MIN.	MAX.	REF.	MIN.	MAX.	REF.
A	0.245	0.260	--	6.22	6.60	--
C	0.240	0.255	--	6.10	6.48	--
G	0.120	0.155	--	3.05	3.93	--
H	0.025	0.031	--	0.64	0.79	--
J	0.167	0.177	--	4.24	4.50	--
K	0.025	0.031	--	0.64	0.79	--
L	0.170	0.185	--	4.32	4.70	--
M	0.170	0.190	--	4.32	4.83	--
N	0.047	0.053	--	1.19	1.35	--
P	0.535	0.565	--	13.59	14.35	--
R	0.185	0.215	--	4.70	5.46	--
T	0.598	0.608	--	15.19	15.44	--
W	--	--	0.100	--	--	2.54

Note:

1. Ref. Dims. are for info. only and are not req'd. for inspection purposes.



tetrodes • pentodes ▶

Look in the general section for---

- Your nearest distributor of modern, fully guaranteed Eimac electron tubes and electron tube accessories.
- Your nearest Eimac Field Engineer, who stands ready to give you immediate engineering assistance, information on deliveries and prices, or provide other information not found in the catalog.
- Eimac tube type numbering system.
- Tube Replacement Chart.
- Prices on Eimac products.

IMPORTANT EIMAC "EXTRAS"

Application Engineering. The Eimac Application Engineering Department is available at all times for consultation. New tube operating techniques are continually being explored, tested and proved by Eimac engineers, whose combined knowledge and experience are at your service. Additional contributions by this Eimac department are its Application Bulletins, a service which you receive without obligation.

Field Engineering. Serving as an extension of the Application Engineering Department outside the Eimac plant, Eimac Field Engineers cover the United States, operating out of offices in major cities. They will help you personally with experimental work, problems of technique, etc. Engineers from Eitel-McCullough, Inc. are available, too, for field consultation throughout the country. As Eimac tubes are world renowned, the same services extend to various countries overseas through the Eimac Export Department.