



9005

9005

U-H-F DIODE


ACORN TYPE

Heater	Coated Unipotential Cathode		
Voltage	3.6	a-c or d-c volts	
Current	0.165	amp.	
Direct Interelectrode Capacitances: ^o			
Plate to Cathode	0.8	μf	
Plate to Heater	0.2 approx.	μf	
Heater to Cathode	1.1 approx.	μf	
Overall Length		1-7/32" $\pm$ 5/32"	
Overall Diameter		1-3/32" $\pm$ 1/16"	
Bulb		T-4 $\frac{1}{2}$	
RCA Socket		Stock No. 9925	
Mounting Position		Any	

*Maximum Ratings are Design-Center Values*RECTIFIER

A-C Plate Voltage (RMS)	117 max. volts
D-C Output Current	1.0 max. ma.

The resonant frequency of the 9005 is approximately 1500 Mc.

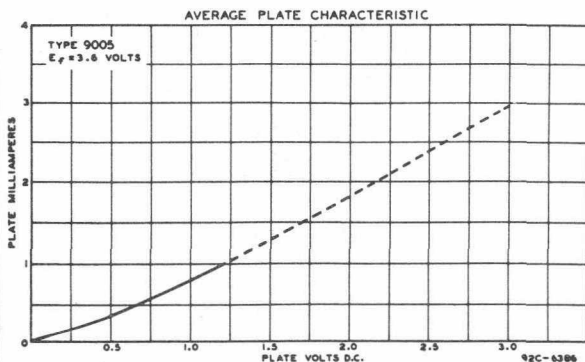
^oWith no external shield.

9005



9005

U-H-F DIODE

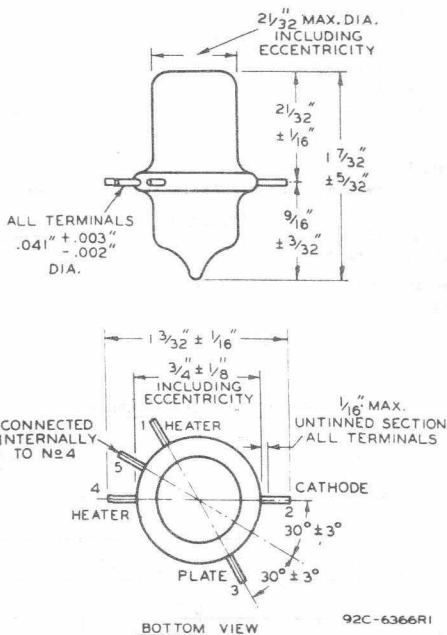

— Indicates a change.

Dec. 1, 1942

RCA RADIONRON DIVISION
RCA MANUFACTURING COMPANY INC.

92C-6366R1




9005

9005

AVERAGE CHARACTERISTICS

 $E_f = 3.6$ VOLTS

CURVE	LOAD RESISTOR OHMS
A	2500
B	5000
C	7500
D	10000
E	15000
F	25000
G	40000
H	100000
I	250000
J	500000
K	1000000

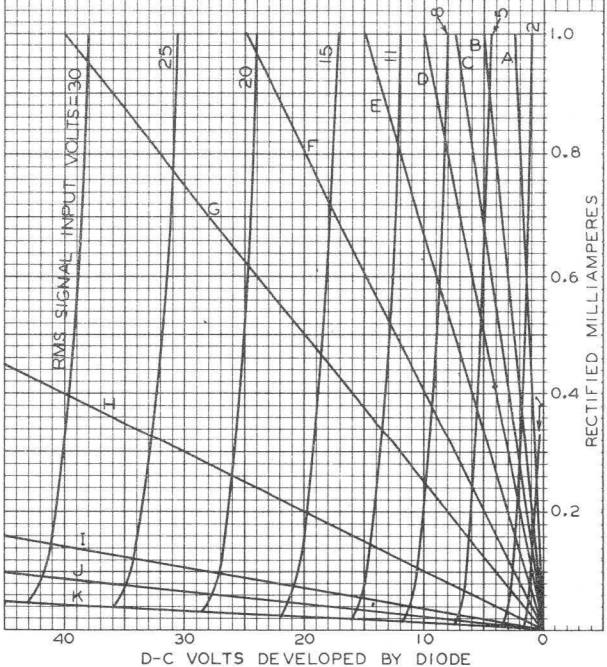

MARCH 20, 1942

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-6384

