


VIDEO FREQUENCY MODULATOR AND CATHODE FOLLOWER

Mounting. The valve must be mounted vertically with the cathode end uppermost. Rigid connections must be made to the anode only.

V_t	6	V
I_t	17	A
V_a (max)	2	kV
p_a (max)	2	kW
I_k (pk) (max)	2	A
μ	14	
g_m (taken at $\frac{1}{2} I_k$ (pk))	27	mA/V
C_{a-g_1}	15	pF
C_{a-k}	5	pF
C_{g_1-k}	20	pF

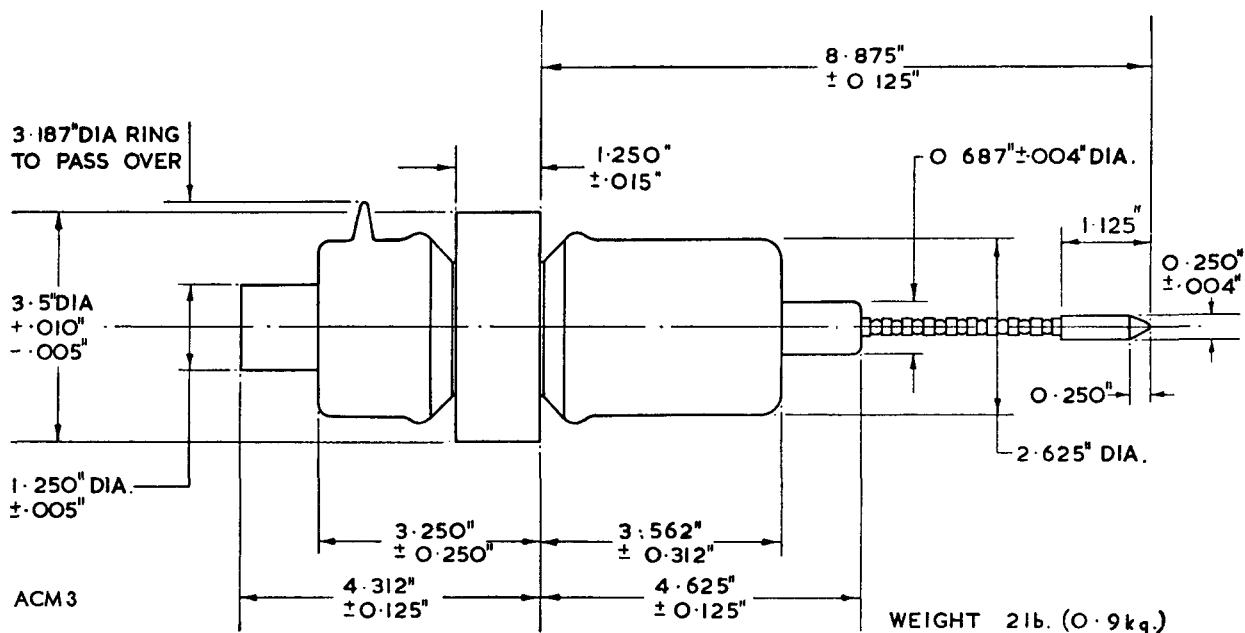

Head Office: Marconi House, Chelmsford, England. Telephone: Chelmsford 3221. Telegraphic Address: Expanse, Chelmsford

