

Mullard

DIRECTLY HEATED RECTIFIER

AZ1



Filament

V_f = 4.0 V
 I_f = 1.1 V

Limiting Values

V_a max		2 x 500 V
I_a max		60 mA
V_a max		2 x 400 V
I_a max		75 mA
V_a max		2 x 300 V
I_a max		100 mA

Arrangement of electrodes and base connections.

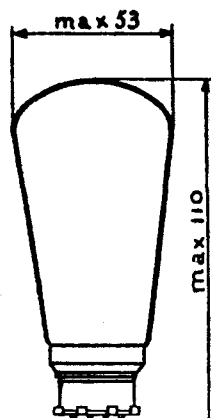

AZ1

AZ1

Mullard DIRECTLY HEATED RECTIFIER

