

PHILIPS „MINIWATT” CB 1 DUO-DIODE

CB 1


Heizung ind. G/W	$V_f = 13 \text{ V}$
Chauffage ind. CC/CA	$I_f = 0,200 \text{ A}$
Heating ind. AC/DC	

Grenzdaten



Données limites

Limits

$V_d \text{ max.}$	$= 200 \text{ V}$
$I_d \text{ max.}$	$= 0,8 \text{ mA}$
$V_{fk} \text{ max.}$	$= 125 \text{ V}$
$R_{fk} \text{ max.}$	$= 20000 \text{ } \Omega$

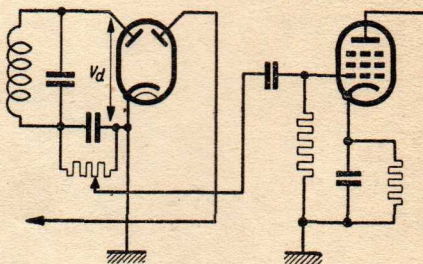

Elektrodenanordnung und Sockelschaltung.
Disposition des électrodes et connexion du culot.
Arrangement of electrodes and base connection.



DUO-DIODE

CB 1


PHILIPS MINIWATT

CB 1

Heating res. CW
 Ohmicity at 25°C
 Heating int. ACDC

Dimensions
 General limits
 Limits

V_d max.
 I_d max.
 V_R max.
 R_R max.
 V_F = 100 V
 I_F = 0.5 mA
 V_R = 125 V
 R_R = 1000 Ω

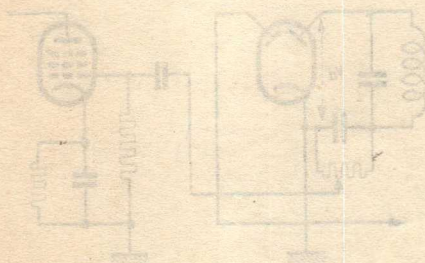

Elektronenstrahlröhre und Sockelbezeichnung
 Disposition des Elektrodes et connexion du cathode
 Arrangement of electrodes and base connection

