

PHILIPS „MINIWATT” CB 1 DUO-DIODE

CB 1


Heizung ind. G/W	$V_f = 13 \text{ V}$
Chauffage ind. CC/CA	$I_f = 0,200 \text{ A}$
Heating ind. AC/DC	

Grenzdaten



Données limites

Limits

$V_d \text{ max.}$	$= 200 \text{ V}$
$I_d \text{ max.}$	$= 0,8 \text{ mA}$
$V_{fk} \text{ max.}$	$= 125 \text{ V}$
$R_{fk} \text{ max.}$	$= 20000 \text{ } \Omega$

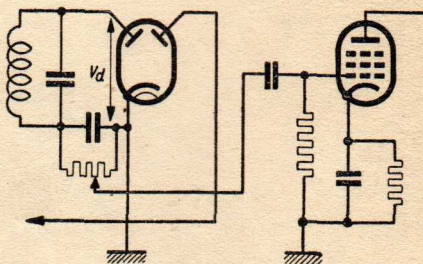

Elektrodenanordnung und Sockelschaltung.
Disposition des électrodes et connexion du culot.
Arrangement of electrodes and base connection.



DUO-DIODE

CB 1


PHILIPS MINIWATT

CB 1

Heating with ACDC
 Operating with CC/CA
 VI = 13 V
 II = 0,100 A

Limites
 Données limites
 Grenzwerte

VR max = 100 V
 IR max = 0,1 A
 VR max = 13 V
 IR max = 1000 Q

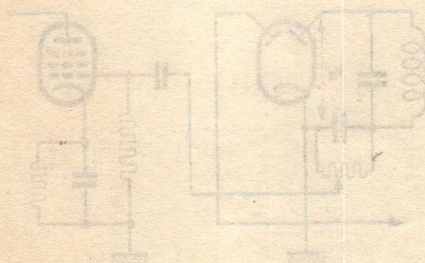

Arrangement of electrical and base connection.
 Disposition des électrodes et connexion de base.
 Elektrodenanordnung und Sockelverbindung.

