


NEC 表示放電管

頭部表示型


CD16A

CD36A(LD5002)

外形寸法
(単位mm)




CD16A




CD36A

ペー
ス
↓矢印は数字
又は記号の
下の方向を
示す。




CD16A



CD36A


ソケット

M-117

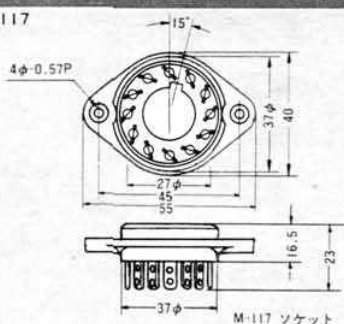

M-117 ソケット

M-126



M-126 ソケット

製 品



CD16A(縮尺3/4)



CD36A(原寸)

頭部表示形規格一覧表

A: 陽極 K: 陰極 () 内は表示内容を示す。IC: 内部接続 (使用せぬこと) NC: 無接続

形 名	表示内容	表示極高さ 約 (mm)	外 形 寸 法 (mm)			陽極供給 直流電圧 最小(Vdc)	許容平均陰極 直流電流 (mAdc)	適応ソケット	
			全 長 (Max)	バルブ直径 (Max)	据付高さ (約)				
CD16A	数字 (0~9) 小数点	28	56	41	39	200	数字極 3.0~5.0 小数点極 0.3~2.0	M-117	K
CD36A (LD5002)	数字 (0~9)	8	30	16.5	21.5	170	1.1~1.9	M-126	K
CD46	数字 (0~9)	74	123	103	92.3	200	12~18	M-121 およびM-121支持体	K
CD56	数字 (0~9)	16	32	20.5 27.5	23	170	1.5~3.0	M-111	
CD57	記号 (+, -)	15	35	27.5	26	170	1.5~3.0	M-111	
CD58	記号 (+, -)	14	32	20.5 27.5	23	170	— 極 0.5~1.7 1 極 1.0~2.2	M-128	
CD67	記号 (+, -)	74	123	103	92.3	200	12~18	M-121 およびM-121支持体	K
CD102	数字 (0~9)	16	35	27.5	26	170	1.5~3.0	M-111	

CD46


CD67

CD56


CD58

CD57


CD102



CD46 CD67




CD56 CD58




CD57 CD102



CD46 CD67




CD56 CD58



CD57 CD102


M-121及びM-121支持体

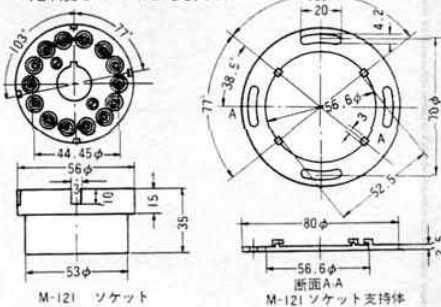

M-121 ソケット


M-121 ソケット支持体

M-128



M-128 ソケット

M-111



M-111 ソケット



CD46(縮尺%)



CD56(原寸)



CD102(原寸)

ト	電 極 接 続														備 考	形 名
	1	2	3	4	5	6	7	8	9	10	11	12	13	14		
持 体	K (・)	K (0)	K (9)	K (8)	K (7)	K (6)	K (5)	K (4)	K (3)	K (2)	K (1)	A			CD16の改良形	C D1 6 A
	K (1)	K (2)	K (3)	K (4)	K (5)	K (6)	K (7)	K (8)	K (9)	K (0)	A				CD36の改良形	C D3 6 A (LD5002)
	K (0)	NC	NC	A	K (9)	K (8)	K (7)	K (6)	K (5)	K (4)	A	K (3)	K (2)	K (1)		C D4 6
		K (0)	K (9)	K (8)	K (7)	K (6)	K (5)	K (4)	K (3)	K (2)	K (1)					C D5 6
	IC	A	IC	IC	IC	IC	K (+)	IC	IC	IC	IC	K (-)	IC		CD102の記号管	C D5 7
持 体	A	IC	K (-)	IC	IC	IC	IC	IC	K (1)	IC	IC				CD56の記号管	C D5 8
	K (+)	NC	NC	A	NC	NC	NC	K (-)	NC	NC	A	NC	NC	NC	CD46の記号管	C D6 7
	IC	A	K (0)	K (9)	K (8)	K (7)	K (6)	IC	K (5)	K (4)	K (3)	K (2)	K (1)			C D1 0 2

側部表示型


CD66(A)

CD69


CD74

LD5001


外形寸法
(単位mm)



ベース
矢印は数字
又は記号の
正面方向を
示す。



CD66(A) 注 赤色マーク



CD69-CD74 LD5001

製品
(原寸)



CD66(A)



CD69



CD74



LD5001

側部表示規格一覧表

A: 陽極 K: 陰極 () 内は表示内容を示す。 IC: 内部接続 (使用せぬこと)
NP: ピン無し


形名	表示内容	表示極高さ 約 (mm)	外形寸法 (mm)			陽極供給 直流電圧 最少 (Vdc)	許容平均陰極 直流電流 (mA dc)
			全長 (Max)	バルブ直径 (Max)	リード線長さ (Min)		
CD66(A)	数字 (0~9) 小数点	16	47.6	19	33	170	数字極 1.5~3.0 小数点極 0.3~0.7
CD69	記号 (+, -)	14	47.6	19	33	170	- 極 0.5~1.7 + 極 1.0~2.2
CD74	数字 (0~9)	16	47.6	19	33	170	1.5~3.0
CD83P	数字 (0~9) 小数点	13	37	13	65	注1 170	注2 数字極 8~22 小数点極 1.2~2.8
LD-955A	数字 (0~9) 小数点	10	38	13	45	注1 190	注2 数字極 5~9 小数点極 1~2
LD5001	記号 (S, ms, μs, HZ, KHZ, MHZ)	10	47.6	19	33	170	1.5~2.7

注1: 陽極せん頭供給電圧


注2: せん頭陰極電流

CD83P


LD-955A




CD83P




LD-955A 注赤色マーク



CD83P



LD-955A 注赤色マーク



CD83P



LD-955A

電 極 接 続														備 考	形 名
1	2	3	4	5	6	7	8	9	10	11	12	13	14		
K (1)	K (2)	K (3)	K (4)	K (5)	K (6)	K (7)	K (8)	K (9)	K (0)	A	K (・)			CD66の改良形	CD 66(A)
IC	IC	K (-)	IC	IC	IC	IC	IC	K (1)	IC	A				CD66(A), CD74 の記号管	CD 69
K (1)	K (2)	K (3)	K (4)	K (5)	K (6)	K (7)	K (8)	K (9)	K (0)	A					CD 74
K [7]	K (6)	K (・)	K (5)	NP	NP	K (1)	K (0)	K (9)	A	K (4)	K (3)	K (2)	K (8)	パルス動作専用 小形高輝度管	CD 83 P
K (1)	K (2)	K (3)	K (4)	K (5)	K (6)	K (7)	K (・)	K (8)	K (9)	K (0)	A			パルス動作専用 小形高輝度管	LD-955 A
IC	IC	IC	K (HZ)	K (μS)	K (MHZ)	K (mS)	K (KHZ)	K (S)	IC	A				CD66(A), CD74 の記号管	LD 5001