

Mullard

MEDIUM IMPEDANCE TRIODE

DA3

TEST DATA

Filament

$V_f = 2.0 \text{ V}$
 $I_f = 0.055 \text{ A}$


Operating Conditions

V_a		20	40 V
I_a		0.5	1.8 mA
$-V_{g1}$		1.0	2.8 V
S		4.7	4.7
S		0.35	0.62 mA/V
R_i		13,500	7,600 Ω

Limiting Values

$V_a \text{ max}$		100 V
$R_{g1} \text{ max}$		1.0 M Ω

Arrangement of electrodes and base connections

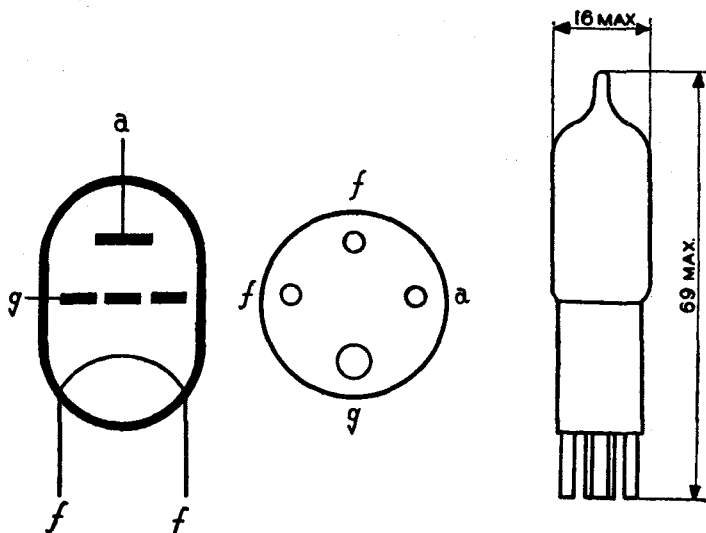

DA3

DA3

Mullard MEDIUM IMPEDANCE TRIODE

