

Mullard

SCREENED TETRODE

DBS1

TENTATIVE DATA

Filament	Vf	=	1.5 V
	If	=	0.07 A

Capacities	Cagl	=	0.07 μ F
	Cgl	=	5.7 μ F
	Ca	=	3.4 μ F


Operating Conditions

Va		120	120	V
Vg2		45	60	V
-Vg		2.0	2.7	V
Ia		0.8	1.5	mA
S		0.43	0.58	mA/V
Ri		0.65	0.5	Ω

Limiting Values

Va max		120	V
Vg2 max		60	V
Rgl max		2.0	Ω

Arrangement of electrodes and base connections.

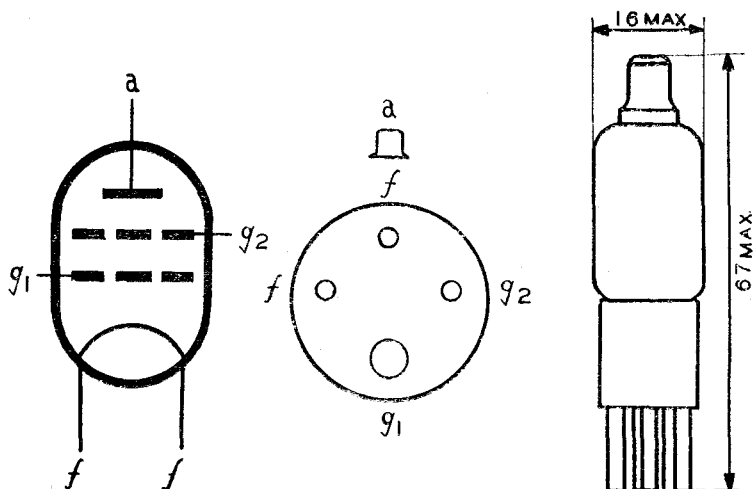

DBS1

DBS1

Mullard SCREENED TETRODE

