

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL73

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

This valve is primarily intended for use in communications equipment of the 'push to talk' type and its continuous life rating under typical supply voltage conditions is relatively short and is chiefly a function of hours of filament operation and filament temperature.

Under 'push to talk' conditions an operating life of about 200 hours may be expected.

FILAMENT

Suitable for d.c. operation only

V_f	1.25	V
I_f	200	mA

MOUNTING POSITION

Any

Note – Direct soldered connections to the leads of this valve must be at least 5mm from the seal and any bending of the valve leads must be at least 1.5mm from the seal.

If the valve is used with an earthed metal clip a decrease in output power of approximately 10% can be expected up to 200Mc/s.

CAPACITANCES

	Shielded	Unshielded	
C_{a-g1}	< 0.15	< 0.1	pF
C_{in}	3.6	3.5	pF
C_{out}	3.9	3.0	pF

CHARACTERISTICS

V_a	100	V
V_{g2}	100	V
V_{g1}	-9.0	V
I_a	15	mA
I_{g2}	3.8	mA
g_m	2.5	mA/V
r_a	16	kΩ
$ Z_{K1-K2} $	6.0	

OPERATING CONDITIONS AS A CLASS 'C' TELEGRAPHY R.F. OSCILLATOR

f	10	50	Mc/s
V_a	150	150	V
V_{g2}	75	75	V
I_a	17	17	mA
I_{g2}	7.0	7.0	mA
I_{g1}	1.0	1.0	mA
R_{g1}	22	18	kΩ
P_{load}	1.4	1.4	W
η_{load}	55	55	%
$V_a(pk)$	130	—	V
$V_{g1}(pk)$	32	—	V



*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

OPERATING CONDITIONS AS A CLASS 'C' TELEGRAPHY R.F. AMPLIFIER

Single valve

f	50	180	200	Mc/s
V _a	150	150	150	V
V _{g2}	75	75	75	V
V _{g1}	-20	-20	-20	V
I _a	17.3	18.3	18.6	mA
I _{g2}	6.7	5.8	5.6	mA
I _{g1}	1.0	0.9	0.8	mA
P _{load}	1.6	1.3	1.2	W
η _{load}	62	47	43	%

P_{drive} measured at the control-grid is approximately 100mW at f=200Mc/s and does not include the power lost in the grid tuned circuit.

P_{load} is approximately 1W at f=250Mc/s.

Two valves in push-pull

f	180	250	Mc/s
V _a	150	150	V
V _{g2}	75	75	V
V _{g1}	-20	-20	V
I _a	2 × 18.1	2 × 18.7	mA
I _{g2}	2 × 5.6	2 × 5.0	mA
I _{g1}	2 × 1.2	2 × 1.2	mA
P _{load}	2.8	2.3	W
η _{load}	52	41	%

Two valves parallel connected

f	180	Mc/s
V _a	150	V
V _{g2}	75	V
V _{g1}	-20	V
I _a	2 × 18.2	mA
I _{g2}	2 × 5.6	mA
I _{g1}	2 × 1.2	mA
P _{load}	2.5	W
η _{load}	46	%

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL73

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

OPERATING CONDITIONS AS FREQUENCY MULTIPLIER

Doubler

f	50	Mc/s
V _a	150	V
V _{g2}	75	V
V _{g1}	-35	V
I _a	17.7	mA
I _{g2}	6.2	mA
I _{g1}	1.1	mA
P _{load}	1.1	W
η_{load}	42	%

Treble

f	50	Mc/s
V _a	150	V
V _{g2}	75	V
V _{g1}	-70	V
I _a	17.9	mA
I _{g2}	5.8	mA
I _{g1}	1.3	mA
P _{load}	800	mW
η_{load}	30	%

OPERATING CONDITIONS AS SINGLE VALVE CLASS 'A' AMPLIFIER

V _a	120	150	V
V _{g2}	90	90	V
V _{g1}	-8.8	-8.5	V
I _{a(0)}	12	13	mA
I _a (max. sig.)	11.6	12.8	mA
I _{g2(0)}	2.5	2.3	mA
I _{g2} (max. sig.)	6.6	6.3	mA
R _a	9.0	10	k Ω
V _{in(r.m.s.)} (P _{out} =50mW)	1.3	1.2	V
P _{out}	730	900	mW
V _{in(r.m.s.)}	6.9	6.5	V
D _{tot}	10	10	%


LIMITING VALUES

V _a max.	150	V
p _a max.	2.0	W
V _{g2} max.	150	V
p _{g2} max.	700	mW
I _k max.	25	mA
R _{g1-f} max.	2.2	M Ω
V _f max. (absolute)	1.35	V
V _{g1} max.:—r.f. amplifier	-30	V
frequency doubler	-35	V
frequency treble	-70	V


DL73

SUBMINIATURE V.H.F. OUTPUT PENTODE

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*




3230



B8D/F Base


All dimensions in mm

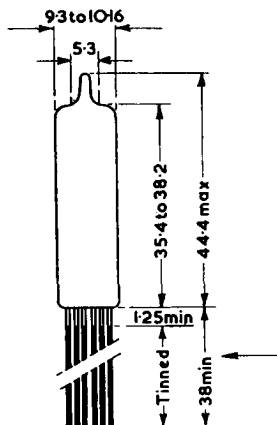

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL73

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

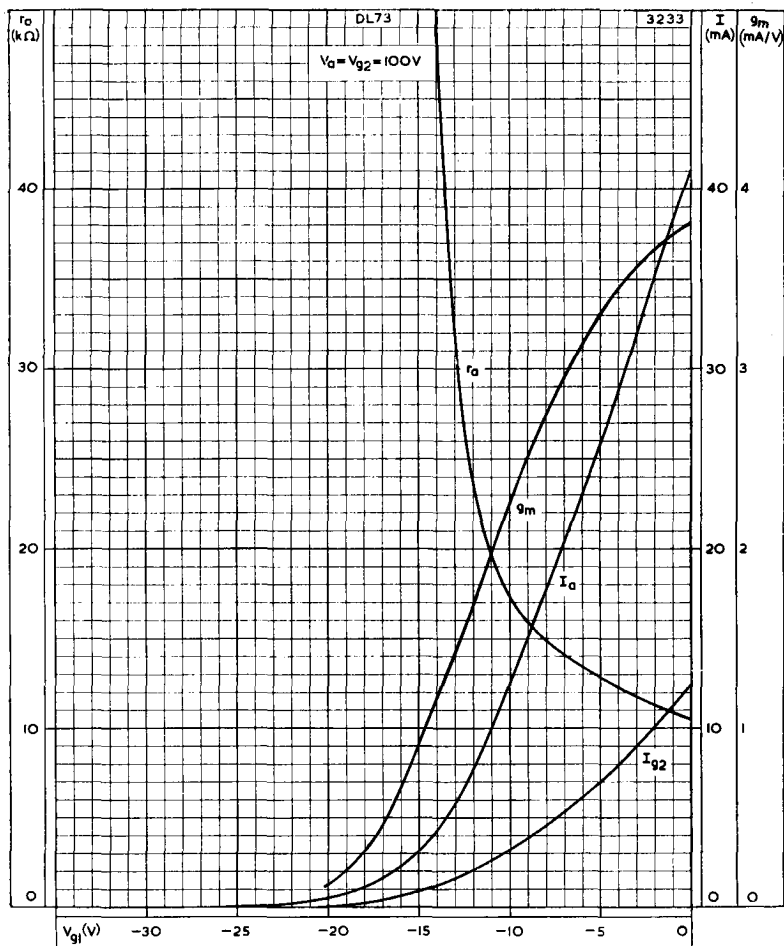


ANODE AND SCREEN-GRID CURRENTS, MUTUAL CONDUCTANCE AND
ANODE IMPEDANCE PLOTTED AGAINST GRID VOLTAGE

DL73

SUBMINIATURE V.H.F. OUTPUT PENTODE

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

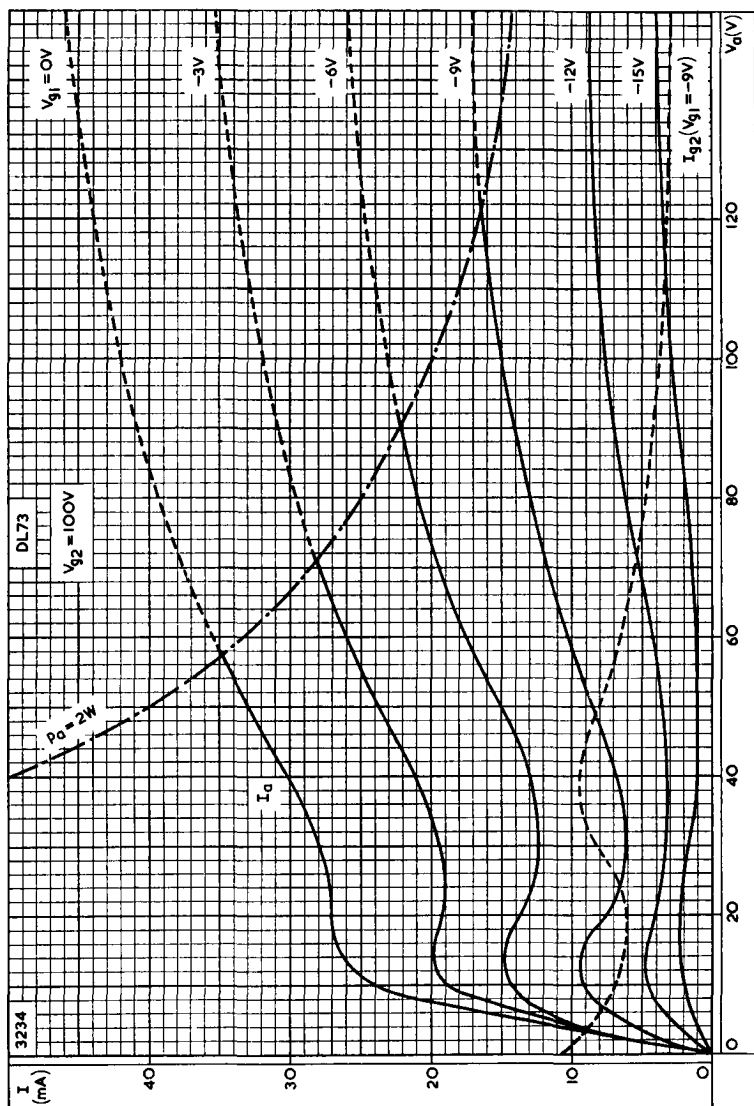


ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE



SUBMINIATURE V.H.F. OUTPUT PENTODE

DL73

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

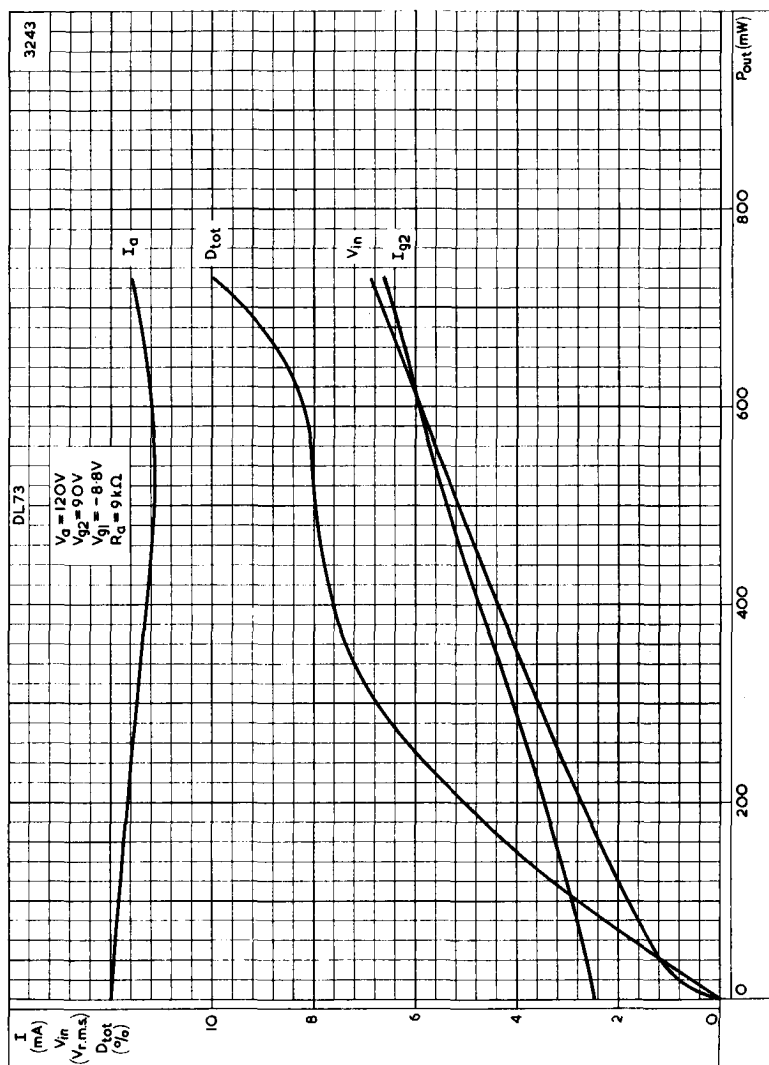


PERFORMANCE OF SINGLE DL73 AS CLASS 'A' AMPLIFIER
 $V_a = 120V$

DL73

SUBMINIATURE V.H.F. OUTPUT PENTODE

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

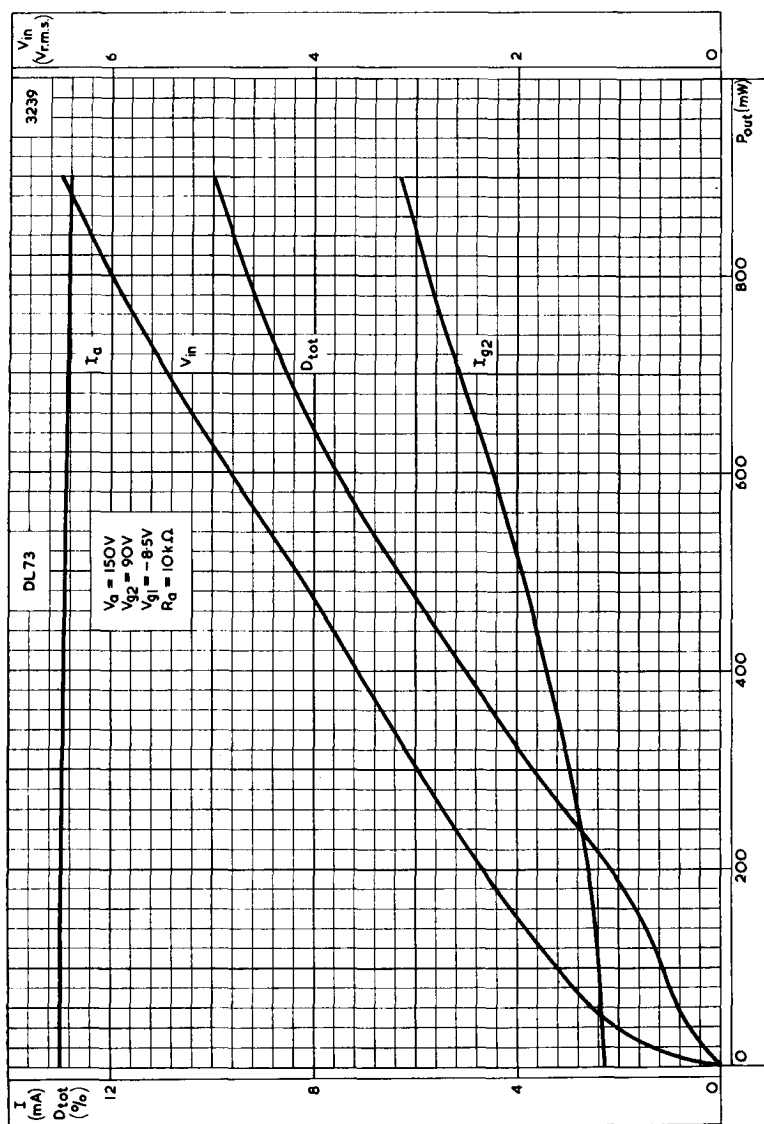

PERFORMANCE OF SINGLE DL73 AS CLASS 'A' AMPLIFIER

$V_g = 150V$

