


CATHODE RAY TUBE for oscillography
TUBE A RAYONS CATHODIQUES pour oscillographie
KATHODENSTRAHLRÖHRE für Oszillographie

Screen Ecran Schirm	Fluorescence Fluorescence Fluoreszenz	Persistence Persistance Persistenz
DB 4-1	blue bleu blau	short courte kurz
DG 4-1	green vert grün	medium moyenne mittel
DP 4-1	blue and greenish-yellow bleu et jaune-verdâtre blau und grünlich-gelb	short long courte longue kurz lang

Heating : indirect by A.C. or D.C.
Chauffage: indirect par C.A. ou C.C.
Heizung : indirekt durch Wechsel-
oder Gleichstrom

 $V_f = 6,3 \text{ V}$
 $I_f = 0,31 \text{ A}$

Dimensions in mm
Dimensions en mm
Abmessungen in mm

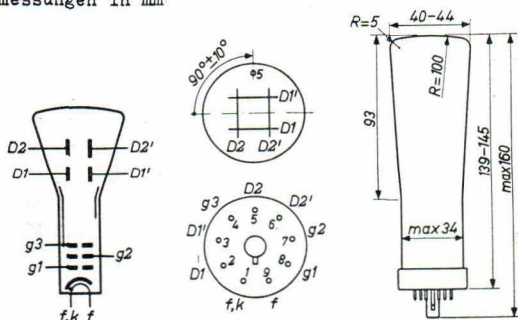

Base, culot, Sockel: Engl. Loctal 9-p

Earthing of g3 is recommended
Il est recommandé de mettre g3 à la terre
Es empfiehlt sich g3 zu erden

DB 4-1
DG 4-1
DP 4-1

PHILIPS

Focusing electrostatic
Concentration électrostatique
Fokussierung elektrostatisch

Deflection double electrostatic D1D1' symmetr.
Déviation électrostatique double D2D2' symmetr.
Ablenkung doppel-elektrostatisch

Capacitances
Capacités
Kapazitäten

C _{g1}	=	10 pF	C _{D2'}	=	4,5 pF
C _{D1}	=	5,3 pF	C _{D1D1'}	=	0,6 pF
C _{D1'}	=	5,3 pF	C _{D2D2'}	=	0,8 pF
C _{D2}	=	4,5 pF	C _{D1D1'-D2D2'}	=	0,1 pF

Line width
Epaisseur de la ligne ($V_{g3} = 800 \text{ V}$)
Linienbreite ($I_{\ell} = 0,5 \text{ } \mu\text{A}$) 0,7 mm¹⁾

Operating characteristics
Caractéristiques d'utilisation
Betriebsdaten

V _{g3}	=	800 V
V _{g2}	=	200-300 V
-V _{g1}	=	0-50 V
N ₁	=	0,25 mm/V
N ₂	=	0,16 mm/V

Limiting values
Caractéristiques limites
Grenzdaten

V _{g3}	= max.	1000 V	V _{D1D1'p}	= max.	450 V
V _{g3}	= min.	800 V	V _{D2D2'p}	= max.	750 V
V _{g2}	= max.	400 V	W _{ℓ'}	= max.	3 mW/cm ²
V _{g1}	= max.	0 V	R _D	= max.	5 MΩ
-V _{g1}	= max.	100 V	R _{g1}	= max.	0,5 MΩ

¹⁾ Measured on a circle of 30 mm diameter
Mesuré à un cercle de 30 mm diamètre
Gemessen an einem Kreis von 30 mm Durchmesser

PHILIPS


DB 4-1

DG 4-1

DP 4-1

7R03952

DG 4-1 9-7-'53

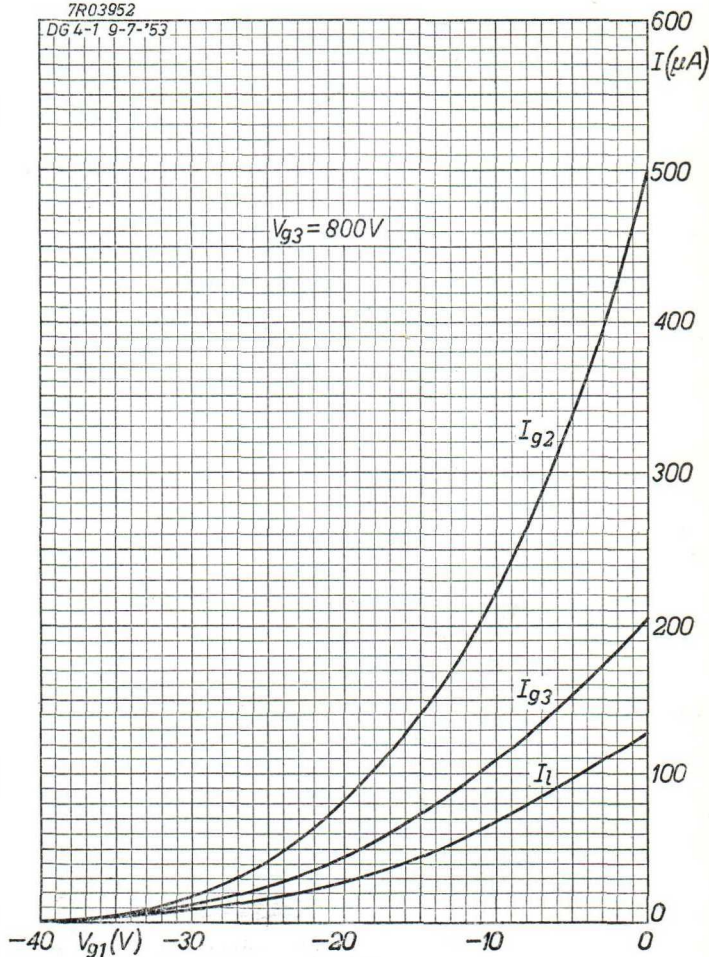

7.7.1953

A

