

S.Q. TUBE

Special quality tube designed for use as wide band amplifier, power output tube and series regulator tube.



QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Mechanical quality	Shock and vibration resistant	
Base	Octal	
Heating	Indirect	
	A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 V
Heater current	I_f	1.2 A
Anode current	I_a	100 mA
Mutual conductance	S	14 mA/V
Output power . Class B (two tubes)	W_o	30 W

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Octal

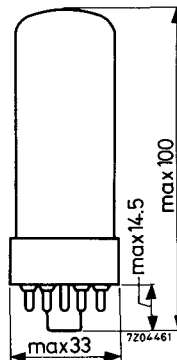

CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	V_f	6.3			V
Heater current	I_f	1.2	1.12-1.28		A
Anode voltage	V_a	100			V
Grid No.2 voltage	V_{g2}	100			V
Cathode resistor	R_k	75			Ω
Anode current	I_a	100	85- 118	min. 65	mA
Grid No.2 current	I_{g2}	5.2	4.0- 6.5		mA
Mutual conductance	S	14	11.5-16.5	min. 9.5	mA/V
Amplification factor	μ_{g2g1}	5.6			
Internal resistance	R_i	5.0			k Ω
<u>Cut off voltage</u>	$-V_{g1}$	35			V
Anode current	I_a	0.1			mA
<u>Negative grid current</u>	$-I_{g1}$		max. 1	max. 2	μ A
<u>As triode. (Grid No.2 connected to anode)</u>					
Anode voltage	V_a	100			V
Cathode resistor	R_k	85			Ω
Anode current	I_a	100			mA
Mutual conductance	S	14			mA/V
Amplification factor	μ	5.2			
Internal resistance	R_i	0.35			k Ω
<u>Insulation resistance between;</u>					
Anode and other electrodes	R_{ins}		min. 100		M Ω
Grid No.1 and other electrodes	R_{ins}		min. 100		M Ω
<u>Leakage current between cathode and heater</u>					
	I_{kf}		max. 20		μ A

CAPACITANCES

Anode to grid No.2, grid No.3,
cathode and heater

	I	II	
C_{a/g_2g_3kf}	9	8- 10	pF

Grid No.1 to grid No.2, grid No.3,
cathode and heater

C_{g_1/g_2g_3kf}	18	16.5-19.5	pF
--------------------	----	-----------	----

Anode to grid No.1

C_{ag_1}		max. 1.2	pF
------------	--	----------	----

SHOCK AND VIBRATION RESISTANCE

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a0}	max. 650 V
	V_a	max. 400 V
Anode dissipation	W_a	max. 15 W
Anode + grid No.2 dissipation	W_{a+g_2}	max. 16 W
Grid No.2 voltage	$V_{g_{20}}$	max. 650 V
	V_{g_2}	max. 300 V
Grid No.2 dissipation	W_{g_2}	max. 5.5 W
Grid No.1 resistor	R_{g_1}	max. 0.5 MΩ
Cathode current	I_k	max. 220 mA
$T_{av} = 10 \text{ ms}$		

LIMITING VALUES (continued)

Cathode peak current	I_{kp}	max. 1.2 A
Voltage between cathode and heater		
cathode positive	$V_{kf}(k\text{ pos})$	max. 250 V
cathode negative	$V_{kf}(k\text{ neg})$	max. 200 V
Bulb temperature	t_{bulb}	max. 220 °C

Heater voltage: The average heater value should be 6.3 V.

Variation of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life.


The tolerance of heater current should be taken into account.


OPERATING CHARACTERISTICS

Output tube. Class B (two tubes). Excitation up to maximum output is continuously permitted.

Anode voltage	V_a	250	V
Grid No.2 voltage	V_{g2}	170	V
Grid No.1 voltage	$-V_{g1}$	34	V
Load resistor	$R_{aa\sim}$	3	k Ω
Grid No.2 resistor	R_{g2}	2×0.5	k Ω ¹⁾
Input voltage	V_i	0 — 22	V _{RMS}
Anode current	I_a	2×12 — 2×94	mA
Grid No.2 current	I_{g2}	2×1 — 2×28	mA
Output power	W_o	0 — 30	W
Total distortion	d_{tot}	— 6	%

¹⁾ To avoid overloading of grid No.2 this resistor should not be by-passed.

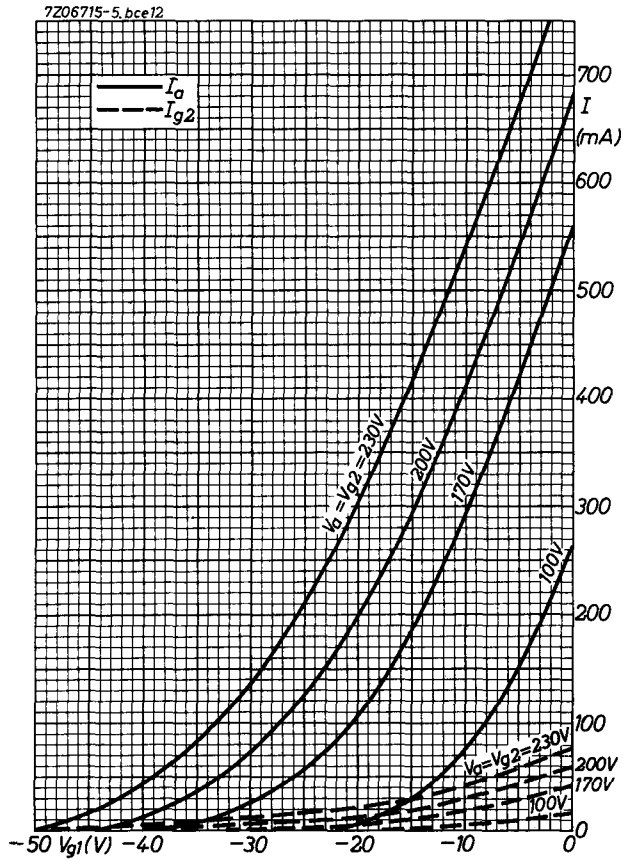

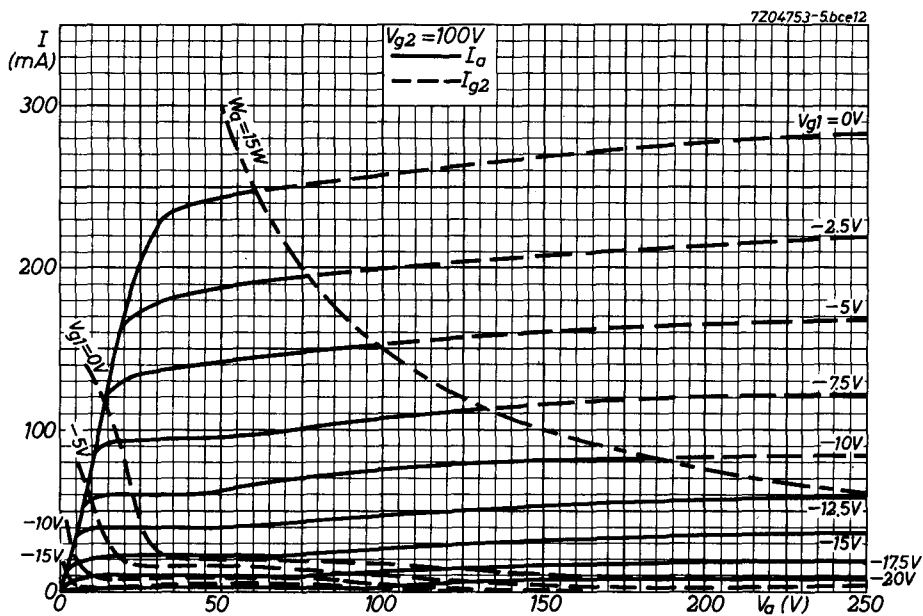

PHILIPS

Data handbook



**Electronic
components
and materials**

E235L

page	sheet	date
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	FP	2000.12.05