


PHILIPS „MINIWATT“

Heizspannung	V_f	= 4,0 V
Tension de chauffage		
Filament voltage		
Heizstrom	I_f	ca.
Courant de chauffage		= env. 1,0 A
Filament current		appr.
Anodenspannung	V_a	= 200 V
Tension anodique	$V_{a \max}$	
Anode voltage		
Normaler Anodenstrom	I_a	= 6 mA
Courant anodique normal		
Normal anode current		
Neg. Gittervorspannung	V_g	ca.
Polarisation négative de grille		= env. 3,5 V
Negative grid bias		appr.
Verstärkungsfaktor	$g(k)$	= 24
Coefficient d'amplification		
Amplification factor		
Steilheit (max.)	$S_{\max}$	= 3,5 mA/V
Inclinaison (max.)		
Slope (max.)		
Steilheit (norm.)	S_{norm}	= 2,4 mA/V
Inclinaison (norm.)		
Slope (norm.)		
Innerer Widerstand (norm.)	R_i	= 10000 Ohm
Résistance intérieure (norm.)		
Internal resistance (norm.)		
Anoden-Gitterkapazität	C_{ag}	= 2 $\mu\mu\text{F}$
Capacité grille-plaque		
Anode-grid capacity		
Max. Länge	l	= 97 mm
Longueur max.		
Overall length		
Grösster Durchmesser	d	= 50 mm
Diamètre max.		
Max. diameter		
Sockel		= 0 35
Culot		
Base		
Sockelschaltung		= S. VII
Connexion du culot		
Base connection		

Anwendung: Audion
 Applications: Détecteur
 Function: Detector
 N.F.-Verstärkung
 Amplification b.f.
 L.F. amplification
 Oszillator
 Oscillateur
 Oscillator

**PHILIPS
MINIWATT
E 424 N**

$V_f = 4,0 \text{ V}$
 $V_{a \text{ max}} = 200 \text{ V}$
 $I_a = 6 \text{ mA}$
 $S_{\text{max}} = 3,5 \text{ mA/V}$
 $S_{\text{norm}} = 2,4 \text{ mA/V}$
 $g(k) = 24$

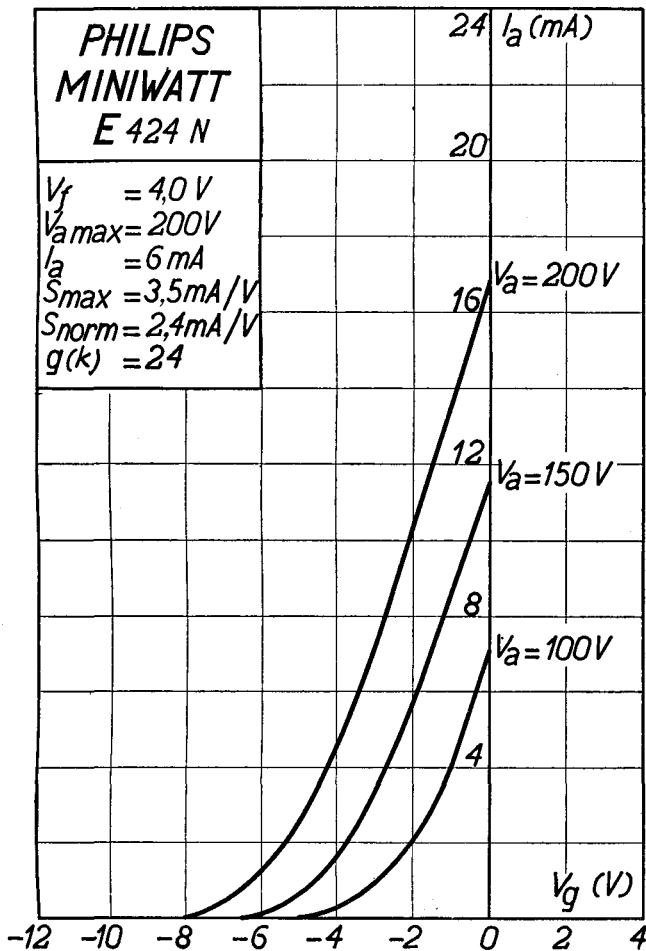


PHILIPS „MINIWATT“

Heizspannung	V_f	= 4,0 V
Tension de chauffage		
Filament voltage		
Heizstrom	I_f	= ca. env. 1,0 A appr.
Courant de chauffage		
Filament current		
Anodenspannung	$V_{a \text{ max.}}$	= 200 V
Tension anodique		
Anode voltage		
Normaler Anodenstrom	I_a	= 6 mA
Courant anodique normal		
Normal anode current		
Neg. Gittervorspannung	V_g	= ca. env. 3,5 V appr.
Polarisation négative de grille		
Negative grid bias		
Verstärkungsfaktor	$g(k)$	= 30
Coefficient d'amplification		
Amplification factor		
Steilheit (max.)	$S_{\text{max.}}$	= 3,5 mA/V
Inclinaison (max.)		
Slope (max.)		
Steilheit (norm.)	$S_{\text{norm.}}$	= 2,4 mA/V
Inclinaison (norm.)		
Slope (norm.)		
Innerer Widerstand (norm.)	R_i	= 12500 Ohm
Résistance intérieure (norm.)		
Internal resistance (norm.)		
Anoden-Gitterkapazität	C_{ag}	= 2 $\mu\mu\text{F}$
Capacité grille-plaque		
Anode-grid capacity		
Max. Länge	l	= 100 mm
Longueur max.		
Overall length		
Grösster Durchmesser	d	= 46 mm
Diamètre max.		
Max. diameter		
Sockel		= 0 35
Culot		
Base		
Sockelschaltung		= S VII
Connexion du culot		
Base connection		
Anwendung: Audion		
Applications: Détecteur		
Function: Detector		
N.F.-Verstärkung		
Amplification b.f.		
L.F. amplification		
Oszillator		
Oscillateur		
Oscillator		

**PHILIPS
MINIWATT
E 424 N**

$V_f = 4,0 \text{ V}$
 $V_{a \text{ max}} = 200 \text{ V}$
 $I_a = 6 \text{ mA}$
 $S_{\text{max}} = 3,5 \text{ mA/V}$
 $S_{\text{norm}} = 2,4 \text{ mA/V}$
 $g(k) = 24$

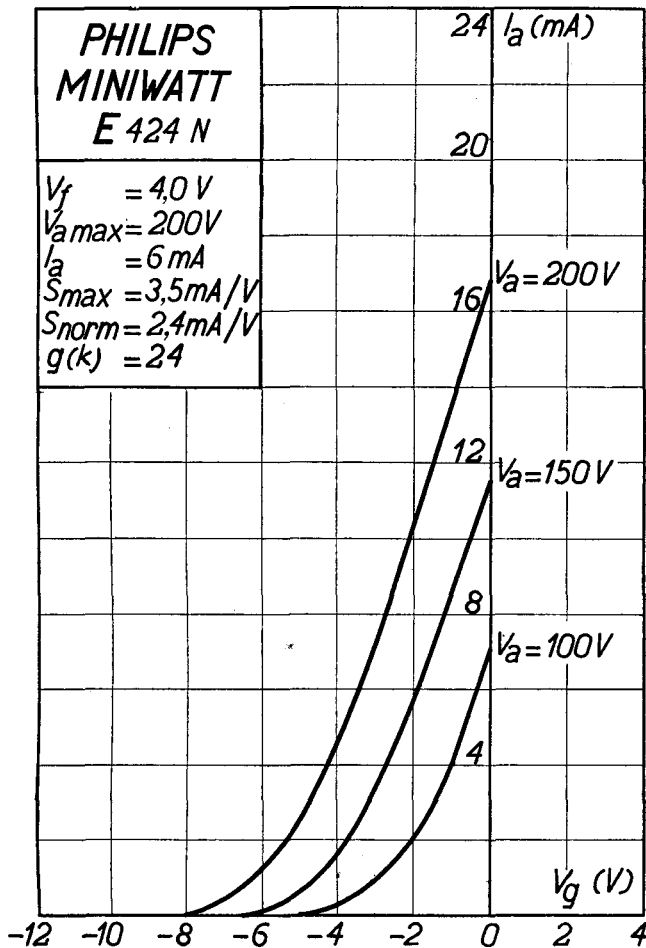


PHILIPS „MINIWATT“

Max. Anodenspannung	V_{ao}	= 400 V
Tension anodique max.	V_{aR}	= 250 V
Max. anode voltage	V_{aL}	= 200 V
Max. Anodenbelastung		
Dissipation anodique max.	W_a	= 1,5 W
Max. anode dissipation		
Max. Kathodenstrom		
Courant cathodique max.	I_c	= 15 mA
Max. cathode current		
Gitterstrom-Einsatzpunkt		
Point de commenc. du courant de grille	V_{gi}	= -1,3 V
Starting point of grid current		
Max. Widerstand im Gitterkreis	R_{g1}	= 2,0 M. Ohm
Résistance max. dans le circuit de grille	R_{g2}	= 1,0 M. Ohm
Max. resistance in grid circuit		
Max. Spann. zwischen Faden und Kath.		
Tension max. entre filament et cathode	V_{fc}	= 50 V ^{*)}
Max. voltage between filam. and cathode		
Max. Widerst. zwischen Faden und Kath.		
Résist. max. entre filament et cathode	R_{fc}	= 20000 Ohm
Max. resist. betw. filament and cathode		
Kapazitäten	C_{ag}	= 2 $\mu\mu\text{F}$
Capacités	C_{ak}	= 7 $\mu\mu\text{F}$
Capacities	C_{gk}	= 5,5 $\mu\mu\text{F}$

*) Siehe Erläuterungen
Voir explications
See explanation

**PHILIPS
MINIWATT
E424N**

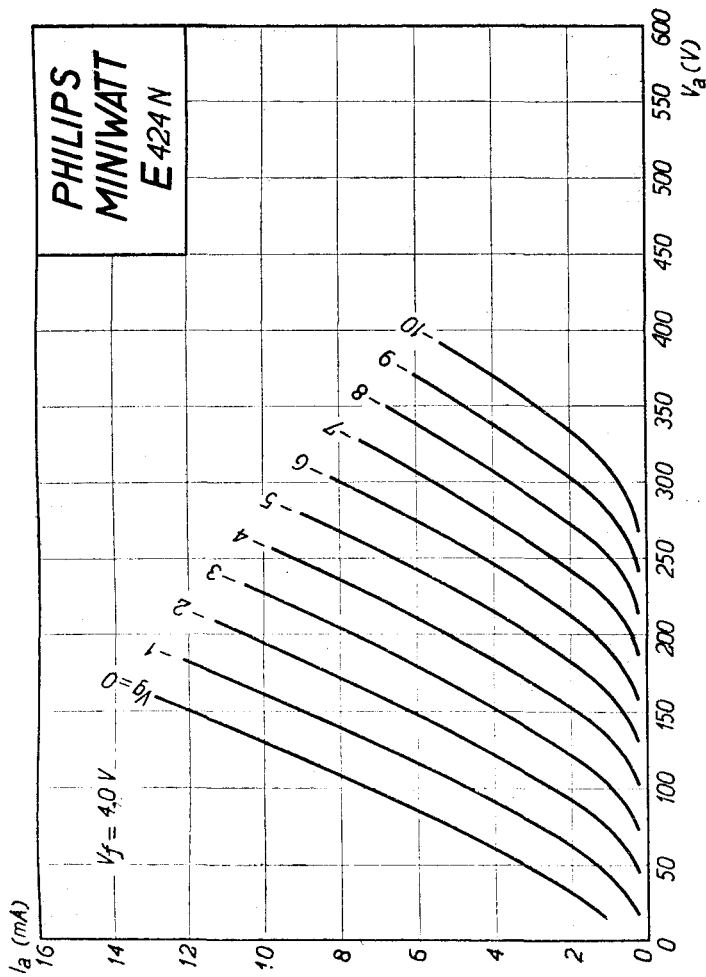

PHILIPS „MINIWATT“

Max. Anodenspannung	V_{ao}	= 400 V
Tension anodique max.	V_{aR}	= 250 V
Max. anode voltage	V_{eL}	= 200 V

Max. Anodenbelastung	W_a	= 1,5 W
Dissipation anodique max.		
Max. anode dissipation		

Max. Kathodenstrom	I_c	= 15 mA
Courant cathodique max.		
Max. cathode current		

Gitterstrom-Einsatzpunkt	V_{gi}	= -1,3 V
Point de commenc. du cour. de grille		
Starting point of grid current		

Max. Widerstand im Gitterkreis . . .	R_{g1}	= 2,0 M. Ohm
Résistance max. dans le circuit de grille	R_{gx}	= 1,0 M. Ohm
Max. resistance in grid circuit . . .		

Max. Spann. zwischen Faden und Kath.	V_{fc}	= 50 V*)
Tension max. entre filament et cathode		
Max. voltage between filam. and cathode		

Max. Widerst. zwischen Faden und Kath.	R_{fc}	= 20000 Ohm
Résist. max. entre filament et cathode		
Max. resist. betw. filament and cathode		

Kapazitäten	C_{ag}	= 2 $\mu\mu F$
Capacités	C_{ak}	= 5,5 $\mu\mu F$
Capacities	C_{gk}	= 5,5 $\mu\mu F$

*) Siehe Erläuterungen
Voir explications
See explanation

